



5CCT IN 1

LED Recessed Light with Night Light

■ User Manual



GET MORE SUPPORT


Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders Or you can send your inquiry to our Official Customer Support at:

✉ support@amicolight.com


☎ +1(626)313-9318

Monday - Friday from 9:00AM - 5:00PM (PT)

- ① Log into your Amazon.com account, click **"Returns&Orders"** on the top-right corner.

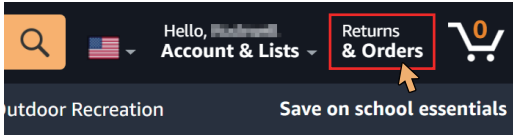


- ② Find your order in the list and click **"View order details"**.

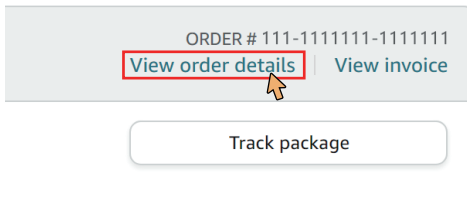


- ③ Click the **"Store Name"** following the Sold by, below the product title.

Delivered yesterday



Sold by: [Store Name]
Serial Numbers:
AZ: [blurred]
Return eligible through Sep 8, 2021
\$49.99

- ④ Click the yellow button "Ask a question", on the top-right corner, to contact the seller.

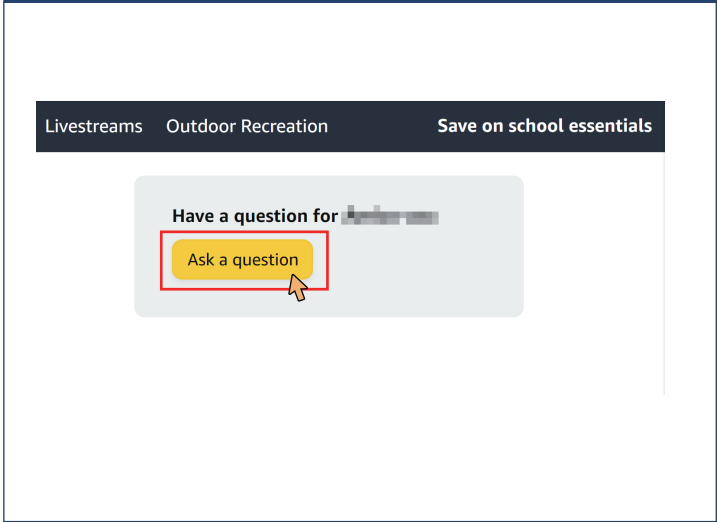

Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders. Or you can send your inquiry to our Official Customer Support at:

Call us:

+1(626)-313-9318

Monday - Friday from 9:00AM - 5:00PM (PT)

Contact via Email: support@amicolight.com

01 30-Day Return Policy

If you're not completely satisfied with your purchase, simply return the merchandise via Amazon Orders. Unused merchandise can be refunded or exchanged within 30 days from the original purchase date.

02 5-Year Warranty


We guarantee your product is free from defects in product material and workmanship for five (5) years starting from the date of purchase during normal use of household conditions. If your appliance fails to operate properly within our warranty period, we will arrange a new replacement free of charge and cover all the shipping costs.

03 Quick Response within 12 Hours

If you are still unable to resolve the issue you are experiencing, please contact us immediately at our support email. It doesn't matter if the product has been installed, our customer support team will respond within 12 hours and assist you quickly and efficiently.

The most efficient way to confirm your problem to us is to attach a video illustrating your product issue.

INSTALLATION VIDEO

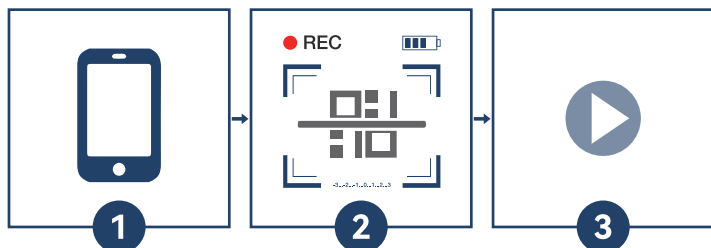

Need a Video Instruction Guide?
Please scan the QR code.

If the QR code is invalid, please contact us for the video.

PREPARATION

Before beginning assembly, installation, or operation Of product, make sure all parts are present.

Compare parts with package and hardware contents list on page 1. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.

Tools Required for Assembly (not included) : Ladder, safety glasses, and drywall saw.

NOTICE

The products may represent a possible shock or fire hazard If Improperly Installed or attached in any way. Products should be Installed in accordance with these Instructions, current electncal codes, and / or the current National Electric Code (NEC). Disconnect power to the unit prior to iInstallation.

WARNING: TO reduce risk Of fire, electric shock, or iryury to persons,

- Read all installation instructions before beginning. If you have any doubts about how to install this lighting fixture, or if the fixture fails to operate completely, consult a qualified electrician to ensure correct branch circuit conductor.

- Always be sure that power supply is turned off at fuse box or circuit breaker before installing, cleaning, or servicing the fixture.

This product must be installed in accoreance with the applicable installation code by a person familiar with the construction and operation Of the product and the hazards involved.

- To reduce the risk Of fire,electnc shock or injury to persons,do not make or alter any open holes in a wiring enclosure nor in any electrical components during kit installation.
- To prevent wiring damage or abrasionl do not expose wiring to edges of sheet metal or other sharp objects.
- There are no serviceable parts inside the fixture.
- Suitable for wet locations.
- Type IC Rated. Suitable for contact with insulation.

SAFETY INFORMATION

- Installer must determine that supply power is 120V AC at the luminaire before installation.
- The National Electric Code (NEC) does not permit cords to be concealed where damage to the cord's insulation may go unnoticed. TO prevent fire damage, do not run cord behind walls, ceilings, soffits, or cabinets where it may be inaccessible for examination. Cords should be visually examined and immediately replaced when any damage is noted.
- Do not alter driver / junction box in any manner,
- To avoid electrical shock, do not operate fixture with missing or damaged lens.

SAVE THESE INSTRUCTIONS. For safest operation, read and become familiar with complete installation instructions prior to use. Pay close attention to this manual and stay within its guidelines when using this product.

CAUTION

All parts must be used as indicated in this manual. Do not substitute any parts, leave parts out, or use parts that are worn out or broken. Failure to obey this instruction could invalidate the ETL certification.

SPECIFICATIONS

4"5CCT IN 1 LED Recessed Light with Night Light


Voltage	120V
Wattage	10W
Lumen	700LM
Average Life(hours)	50000h
Warranty	5 years
Color Temperature	2700K/3000K/3500K/4000K/5000K +2000K(NIGHT LIGHT)

6"5CCT IN 1 LED Recessed Light with Night Light

Voltage	120V
Wattage	12W
Lumen	1100LM
Average Life(hours)	50000h
Warranty	5 years
Color Temperature	2700K/3000K/3500K/4000K/5000K +2000K(NIGHT LIGHT)

ACCESSORIES LIST


A



LED
Recessed Light

×1

B



J-Box driver

×1

C



Connectors

×3

D





Hole cutout card

×1

INSTALLATION STEPS

- step: 1** Turn off the power before installation. Remove the existing bulb and if necessary remove the existing trim. Open the hole on the mounting surface according to the size of fixture.




HOLE SIZE

4inch: 4 21/64 inches(110mm)
6inch: 6 19/64 inches(160mm)

- step: 2** Open the junction box, connect L/G/N wires with quick connectors respectively,select lamp color desired by CCT switch.

5 IN 1


- 2700K
- 3000K
- 3500K
- 4000K
- 5000K



black ----- L
white ----- N
Copper wire ----- G


Break off the round iron plate and the AC incoming line enters from here.

- step: 3** Conned the fixture power cable to the junction box.




INSTALLATION STEPS

step: 4 Install the fixture to ceiling surface.

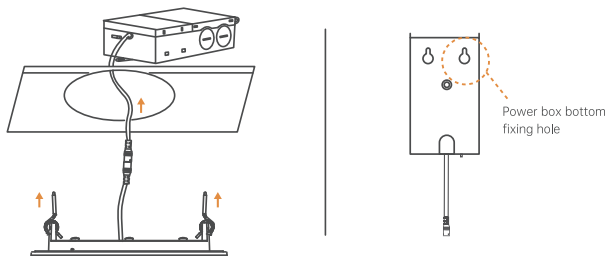

step: 5 Turn on the power after installation, check the fixture can work well.

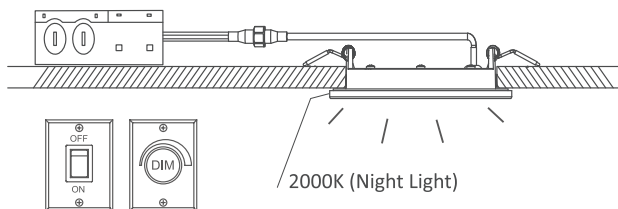

INSTALLATION STEPS

SELECTING DOWNLIGHT OR NIGHTLIGHT MODE

NOTE: The factory setting for the correlated color temperature (CCT) is 2700K, which is the warmest white light.

1. SELECTING MAIN LIGHT MODE OR NIGHT LIGHT MODE.

The product has two modes: main light mode and night light mode.


Main light mode provides full brightness and allows selection from five color temperatures: 2700K, 3000K, 3500K, 4000K and 5000K.

Night light mode provides reduced light output at 2000K color temperature for very soft illumination at night.

2.CONVENIENT CONTROL USING LIGHT SWITCH.

NOTE: The main downlight will not provide light output when the nightlight trim is illuminated.

Switch the downlight off and back on again within (1~4) seconds to activate night light mode.



COMMON TROUBLESHOOTING

PROBLEMS AND COUNTERMEASURES

PROBLEM	PROBABLE CAUSE	SOLUTION
Unlit	The wire falls off/loosens/breaks	Check that the wires are well connected
	The power switch is not turned on	Ensure that the power switch is on
	Voltage is too high, product is damaged	Ensure that the voltage is 120V
	None of the above	Reach out to our Customer Support
Dim	Incompatible dimmer	Check and choose a dimmer from the recommended dimmer list
	Not setting the dimmer right	Check dimmer Settings
	Too many lights are connected to one dimmer	Total Power Of the Lights \leq 75% of the Rated Power of the Dimmer
	The brightness of lighting is too low	Install more lights and recommended spacing for installation of 4" lights: 2-4ft, & 6" lights: 5-7ft
	The brightness of lighting is too high	Lower the dimmer or reduce the number of lights at the same time
	Mix the junction boxes (4" and 6")	Check if the junction box matches
	The product is not installed in place	Check the product installation steps to ensure that the springs and other parts are normal
	None of the above	Reach out to our Customer Support
Flickering	The wire falls off/loosens/breaks	Check that the wires are well connected
	Incompatible dimmer	Check and choose a dimmer from the recommended dimmer list
	Too many lights are connected to one dimmer	Total Power Of the Lights \leq 75% of the Rated Power of the Dimmer
	High-power electrical appliances on the same circuit	Reduce the number of lights at the same time
	Voltage is too low	Check the circuit voltage to make sure the voltage is 120V
	None of the above	Reach out to our Customer Support
Overheating	Too many lights are connected to one dimmer	Total Power Of the Lights \leq 75% of the Rated Power of the Dimmer
	None of the above	Reach out to our Customer Support

DIMMER COMPATIBILITY GUIDE

BRAND	MODEL	STAR RATING
LUTRON	TG-600PR-WH	★ ★ ★ ★ ↘
	S-600PR-WH	★ ★ ★ ★ ↘
	CTCL-153PDH-WH	★ ★ ★ ★ ↘
	TGCL-153PH-LA	★ ★ ★ ★ ↘
	SLV-600P-AL	★ ★ ★ ★ ↘
	DV-600PR-WH	★ ★ ★ ★ ↘
	SCL-153PH-WH	★ ★ ★ ★ ↘
	GT-600P	★ ★ ★ ★ ↘
	DVCL-153P	★ ★ ★ ★ ↘
	RNL06	★ ★ ★ ★ ↘
	MSCL-OP153M	★ ★ ★ ★ ↘
	IPL06	★ ★ ★ ★ ↘
LEVITON	6672	★ ★ ★ ★ ↘
	6674	★ ★ ★ ★ ↘
	DSL06	★ ★ ★ ★ ↘
	PD-6WCL	★ ★ ★ ★ ↘
	MACL-153M//MA-R	★ ★ ★ ★ ↘

After Sales Service

1. Please stop using the product immediately if the product shows any visible defect and contact customer service.
2. If there is any problem with the recessed lighting for non-human reasons, please reach out to customer support. We will send you a brand-new replacement without the need of returning the original product or a full refund.
3. If you are not completely satisfied with the product after installation but prefer not to disassemble, get in touch with our customer support right away and we provide comparable compensations.



GET MORE SUPPORT

Should you experience any issues while operating any of our products, you can directly reach out to our Customer Support via Amazon Orders.

Or you can send your inquiry to our Official Customer Support at:

 support@amicolight.com

 +1(626)313-9318 Monday - Friday from 9:00AM - 5:00PM (PT)

MADE IN CHINA