

**Anritsu** Advancing beyond

# Remote Spectrum Monitor

For Remote RF Signal Monitoring

## MS27102A

9 kHz to 6 GHz



## Introduction

The Anritsu platform of spectrum monitors provides high performance real-time monitoring of the radio spectrum. Designed to be stable over time under continuous operation, the MS27102A monitor provides superior sweep speeds, high dynamic range, and low spurious levels for fast and accurate measurements. Applications include monitoring for interference, white space analysis, unlicensed transmission discovery, and signal coverage.

The MS27102A features an IP67 rated outdoor enclosure designed for remote operations in the harshest of environments. The MS27102A is available as a single port RF-IN instrument with an option for two ports that enable the use of multiple antennas.

## Remote Spectrum Monitor Highlights

- Sweep rates up to 24 GHz/s
- Integrated web server to view, control, and conduct measurements via a web browser (Chrome or Firefox)
- Remote firmware updates
- Watchdog timer to insure long-term stability for remotely deployed monitors
- Low spurious signals for accurate signal discovery
- 20 MHz IF bandwidth
- Low power consumption <11 watts
- Integrated GPS receiver for monitoring location and time synchronization applications
- Gigabit Ethernet available for high speed communications
- Measurements: occupied bandwidth, channel power
- Interference analysis: spectrogram and signal strength
- Dynamic range: >106 dB normalized to 1 Hz BW
- Phase noise: -98 dBc/Hz @ 10 kHz offset at 1 GHz
- Frequency accuracy: <  $\pm 1.5$  ppm, <  $\pm 50$  ppb with GPS High Accuracy Mode
- IQ block mode and streaming with time stamping for time difference of arrival (TDOA) applications
- Remote control via SCPI commands
- Vision™ software optional for automated spectrum measurements, setting alarms, and geo-locating signal sources



MS27102A Remote Spectrum Monitor

**Table of Contents**

Definitions.....3  
 Remote Spectrum Monitor.....4  
 Multiple RF Input Ports (Option 402, 404, and 406).....5  
 General Specifications.....6  
 Ordering Information.....7

**Definitions**

All specifications and characteristics apply under the following conditions, unless otherwise stated:

Warm-Up Time	After 10 minutes of warm-up time, where the instrument is left in the on state.
Temperature Range	Over the 23 °C ±5 °C temperature range.
Typical Performance	Typical specifications in parenthesis () describe performance that will be met by a minimum of 80% of all products. They do not include guard bands and are not warranted. Typical specifications that are not in parenthesis are not tested and not warranted. They are generally representative of the nominal characteristic performance.
Uncertainty	A coverage factor of k = 2 is applied to the measurement uncertainties to facilitate comparison with other industry monitors. All specifications subject to change without notice. For the most current data sheet, please visit the Anritsu web site: <a href="http://www.anritsu.com">www.anritsu.com</a>

Remote Spectrum Monitor

<b>Frequency</b>		Frequency Range	9 kHz to 6 GHz (tunable to 0 Hz)	
		Tuning Resolution	1 Hz	
		Frequency Reference	Accuracy: $\pm 1.5$ ppm ( $25\text{ }^\circ\text{C} \pm 25\text{ }^\circ\text{C}$ ) $\pm 1.0$ ppm/year aging < $\pm 50$ ppb with GPS on	
		Frequency Span	10 Hz to 6 GHz	
<b>Sweep Speed</b>		Typical (full span FFT mode)		
		10 kHz RBW	5 GHz/s	
		30 kHz RBW	12 GHz/s	
		3 MHz RBW	24 GHz/s	
<b>Bandwidth</b>		Resolution Bandwidth (RBW)	10 Hz to 3 MHz in 1-3 sequence (-3 dB bandwidth)	
		Video Bandwidth (VBW)	10 Hz to 3 MHz in 1-3 sequence (-3 dB bandwidth) (auto or manually selectable)	
<b>Spectral Purity</b>		SSB Phase Noise @ 1 GHz	(-98 dBc/Hz) @ 10 kHz offset (-98 dBc/Hz) @ 100 kHz offset	
<b>Amplitude Ranges</b>		Dynamic Range	> 106 dB at 2.4 GHz), 2/3 (TOI-DANL) in 1 Hz RBW	
		Measurement Range	DANL to Maximum Continuous Input	
		Reference Level Range	-150 dBm to +30 dBm	
		Attenuator Range	0 dB to 50 dB in 5 dB steps	
		Amplitude Units	Log Scale Modes: dBm, dB $\mu$ V	
		Maximum Continuous Input	without Option 402, 404, or 406	with Option 402, 404, or 406
		100 MHz to 6 GHz, $\geq 10$ dB attenuation	+30 dBm <sup>a</sup> , $\pm 50$ VDC	+20 dBm <sup>b</sup> , $\pm 50$ VDC
		300 kHz to 6 GHz, < 10 dB attenuation	+10 dBm <sup>a</sup> , $\pm 50$ VDC	+10 dBm <sup>b</sup> , $\pm 50$ VDC
		9 kHz to 6 GHz, preamp on	-10 dBm, $\pm 50$ VDC	-10 dBm, $\pm 50$ VDC
			a. For lower frequencies, derate maximum continuous input by 6 dB per decade	b. For lower frequencies, derate maximum continuous input by 4 dB per decade
<b>Amplitude Accuracy</b>		Attenuation $\leq 40$ dB, preamp off for frequencies less than 100 kHz		
		9 kHz to 6.0 GHz	$\pm 2.5$ dB	
<b>Displayed Average Noise Level (DANL)</b>		RBW normalized to 1 Hz, 0 dB attenuation		
		Preamp Off, Reference Level -20 dBm		Preamp On, Reference Level -50 dBm
		Max (dBm)	Typical (dBm)	Max (dBm)
		10 MHz to 3.3 GHz	-145	-150
		> 3.3 GHz to 4.1 GHz	-140	-145
		> 4.1 GHz to 5 GHz	-138	-143
		> 5 GHz to 6 GHz	-128	-136
			-146	-154
<b>Spurs</b>		Typical		
		Residual Spurious	(< -80 dBm) RF input terminated, 0 dB input attenuation, preamp off, > 10 MHz (< -95 dBm) RF input terminated, 0 dB input attenuation, preamp on, > 10 MHz (< -88 dBm) RF input terminated, 0 dB input attenuation, preamp on, 16 MHz to 18 MHz	
		Input-Related Spurious	< -60 dBc, 0 dB attenuation, -30 dBm input, carrier offset > 5 MHz	
		Exceptions	< -60 dBc, input = 4140 MHz	
<b>Second Harmonic Distortion</b>		Typical; 0 dB attenuation, -30 dBm input		
		50 MHz	(-50 dBc)	
		> 50 MHz to 200 MHz	< -60 dBc	
		> 200 MHz to 3000 MHz	< -60 dBc	
<b>Third-Order Intercept (TOI)</b>		Typical; preamp off, -20 dBm tones 100 kHz apart, 0 dB attenuation, reference level -20 dBm		
		800 MHz	(+7 dBm)	
		2400 MHz	(+17 dBm)	
		200 to 2200 MHz	+10 dBm	
		> 2.2 GHz to 5.0 GHz	+8 dBm	
		> 5.0 GHz to 6.0 GHz	+14 dBm	

Remote Spectrum Monitor (continued)

**VSWR** < 2.5:1 typical

**Signal Processing**

Data Types I/Q time series: 8, 10, 16 or 24 bit resolution  
Spectrum trace: 100 to 4000 points  
Data Transfer Modes I/Q time series or spectrum trace in streaming or block mode  
I/Q Data Streaming Rate Gapless on 100Base-T network, Up to 2.6 MHz signal bandwidth  
I/Q Data Time Stamp Resolution 8.7 ns

**I/Q Recording Time** Typical

Signal Bandwidth	Output Data Rate MSPS	I/Q Bit Resolution			
		24 bits	16 bits	10 bits	8 bits
20 MHz	76.25 / 3	1.3 s	2.5 s	3.8 s	5 s
13.3 MHz	76.25 / 4	1.7 s	3.4 s	5 s	6.7 s
6.67 MHz	76.25 / 8	3.4 s	6.7 s	10.1 s	13.4 s
2.67 MHz	76.25 / 20	8.4 s	16.8 s	25.2 s	33.6 s
1.33 MHz	76.25 / 40	16.8 s	33.6 s	50.4 s	1.12 min
667 kHz	76.25 / 80	33.6 s	1.12 min	1.68 min	2.24 min
267 kHz	76.25 / 200	1.4 min	2.8 min	4.2 min	5.6 min
133 kHz	76.25 / 400	2.8 min	5.6 min	8.39 min	11.19 min
66.7 kHz	76.25 / 800	5.6 min	11.19 min	16.79 min	22.38 min
26.7 kHz	76.25 / 2000	13.99 min	27.98 min	41.97 min	55.96 min
13.3 kHz	76.25 / 4000	27.98 min	55.96 min	1.4 h	1.87 h
6.67 kHz	76.25 / 8000	55.96 min	1.87 h	2.8 h	3.73 h
2.67 kHz	76.25 / 20000	2.33 h	4.66 h	6.99 h	9.33 h
1.33 kHz	76.25 / 40000	4.66 h	9.33 h	13.99 h	18.65 h


**Multiple RF Input Ports (Option 402, 404, and 406)** (provides two, four, or six RF input ports)

**Amplitude Accuracy** Attenuation ≤ 40 dB, preamp off for frequencies less than 100 kHz  
9 kHz to 5 GHz ± 2.5 dB  
> 5 GHz to 6.0 GHz ± 3 dB

**Displayed Average Noise Level (DANL)** RBW normalized to 1 Hz, 0 dB attenuation

	Preamp Off, Reference Level -20 dBm		Preamp On, Reference Level -50 dBm	
	Max (dBm)	Typical (dBm)	Max (dBm)	Typical (dBm)
10 MHz to 3.3 GHz	-140	-147	-157	-162
> 3.3 GHz to 4.1 GHz	-135	-142	-152	-158
> 4.1 GHz to 5 GHz	-133	-139	-151	-157
> 5 GHz to 6 GHz	-117	-129	-137	-147

**Antenna Port Isolation** Typical  
≤ 3 GHz > 40 dB  
> 3 GHz > 30 dB

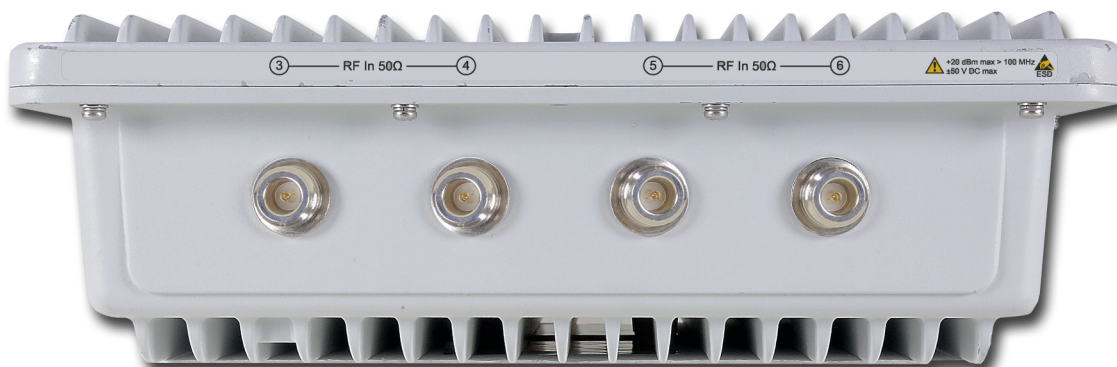

MS27102A Remote Spectrum Monitor, rear panel connectors with Option 406

## General Specifications

### Setup Parameters

System Status	Temperature, Serial Number, Firmware Version, Options Installed, Self Test, Application Self Test, GPS
System Options	Name, Date and Time, Reset (Factory Defaults, Master Reset, Update Firmware)
Directory Management	Sort Method (Name/Type/Date), Ascend/Descend, Internal/USB, Copy
Internal Trace/Setup Memory	4 GB internal memory available for storing files
Mode Switching	Automatically stores/recalls most recently used setup parameters in the mode

### Connectors

RF In	One type N, female port, 50 $\Omega$ Two, four, or six type N, female ports, 50 $\Omega$ (Option 402, 404, or 406)
External Power	11 W, 11 V to 24 V, 3-pin IP67 power connector
Ethernet	1 RJ45 connector for Gbit LAN (ruggedized and weatherproof)
GPS	SMA(f)

### Regulatory Compliance

European Union	EMC 2014/30/EU, EN 61326:2013, CISPR 11/EN 55011, IEC/EN 61000-4-2/3/4/5/6/8/11 Low Voltage Directive 2014/35/EU Safety EN 61010-1:2010 RoHS Directive 2011/65/EU applies to instruments with CE marking placed on the market after July 22, 2017
Australia and New Zealand	RCM AS/NZS 4417:2012
South Korea	KCC-REM-A21-0004
Canada	ICES-1(A)/NMB-1(A)

### Environmental

	MIL-PRF-28800F Class 2
Operating Temperature Range	-40 °C to 55 °C
Storage Temperature Range	-51 °C to 71 °C
Maximum Relative Humidity	95 % RH at 30 °C, non-condensing
Vibration, Sinusoidal	5 Hz to 55 Hz
Vibration, Random	10 Hz to 500 Hz
Half Sine Shock	30 g <sub>n</sub>
Altitude	4600 meters, operating and non-operating
Explosive Atmosphere	MIL-PRF-28800F, Section 4.5.6.3 MIL-STD-810G, Method 511.5, Procedure 1

### ESD

RF Input Pin	Withstands up to $\pm 4$ kV
--------------	-----------------------------

### Size and Weight

Size	310 mm x 102 mm x 310 mm (12.2 in x 4.0 in x 12.2 in)
Weight	6.87 kg (15.2 lb)

### Warranty






Instrument	Standard three-year warranty
------------	------------------------------

Ordering Information



Model Number	Description
MS27102A	Spectrum Monitor with 1 RF IN Port (requires one frequency option)
Option Number	Description
MS27102A-0128	Vector Signal Analysis Enabled (use with MX280005A)
MS27102A-0706	9 kHz to 6 GHz Frequency Range
MS27102A-0402	2 RF IN Ports (2 front RF-In ports)
MS27102A-0404	4 RF IN Ports (2 front RF-In ports with 2 RF-in rear ports)
MS27102A-0406	6 RF IN Ports (2 front RF-In ports with 4 RF-in rear ports)
MS27102A-0400	Vision Monitor Enabled
MS27102A-0401	Vision Locate Enabled (requires Option 400 above)
MS27102A-0407	Vision High-Speed Port Scanner Enabled
MS27102A-0486	Vision Coverage Mapping (requires Option 407)

Accessories

Accessory	Description	Accessory	Description
	40-187-R AC/DC Power Supply, 1 m, 12 VDC Output (included with instrument)		2000-1371-R Ethernet Cable, 2.13 m (7 ft) (included with instrument)
	2000-1528-R Magnet Mount GPS Antenna, SMA(m) with 5 m (16.4 ft) cable, requires 5 VDC (included with instrument)		2100-32-R Power Adapter (included with instrument)
	760-285-R Large Transit Case with Wheels and Handle		



## Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses, visit: [www.anritsu.com/training](http://www.anritsu.com/training)



### • United States

**Anritsu Americas Sales Company**  
450 Century Parkway, Suite 190,  
Allen, TX 75013, U.S.A.  
Phone: +1-800-Anritsu (1-800-267-4878)

### • Canada

**Anritsu Electronics Ltd.**  
700 Silver Seven Road, Suite 120,  
Kanata, Ontario K2V 1C3, Canada  
Phone: +1-613-591-2003  
Fax: +1-613-591-1006

### • Brazil

**Anritsu Eletronica Ltda.**  
Praça Amadeu Amaral, 27 - 1 Andar  
01327-010 - Bela Vista - Sao Paulo - SP, Brazil  
Phone: +55-11-3283-2511  
Fax: +55-11-3288-6940

### • Mexico

**Anritsu Company, S.A. de C.V.**  
Blvd Miguel de Cervantes Saavedra #169 Piso 1,  
Col. Granada, Mexico, Ciudad de Mexico,  
11520, MEXICO  
Phone: +52-55-4169-7104

### • United Kingdom

**Anritsu EMEA Ltd.**  
200 Capability Green,  
Luton, Bedfordshire, LU1 3LU, U.K.  
Phone: +44-1582-433200  
Fax: +44-1582-731303

### • France

**Anritsu S.A.**  
12 avenue du Québec, Immeuble Goyave,  
91140 VILLEBON SUR YVETTE, France  
Phone: +33-1-60-92-15-50

### • Germany

**Anritsu GmbH**  
Nemetschek Haus, Konrad-Zuse-Platz 1,  
81829 München, Germany  
Phone: +49-89-442308-0  
Fax: +49-89-442308-55

### • Italy

**Anritsu S.r.l.**  
Spaces Eur Arte, Viale dell'Arte 25, 00144 Roma, Italy  
Phone: +39-6-509-9711

### • Sweden

**Anritsu AB**  
Kistagången 20 B, 2 tr, 164 40 Kista, Sweden  
Phone: +46-8-534-707-00

### • Finland

**Anritsu AB**  
Technopolis Aviapolis, Teknobulevardi 3-5 (D208.5),  
FI-01530 Vantaa, Finland  
Phone: +358-20-741-8100

### • Denmark

**Anritsu A/S**  
c/o Regus Winghouse, Ørestads Boulevard 73, 4th  
floor,  
2300 Copenhagen S, Denmark  
Phone: +45-7211-2200

### • Russia

**Anritsu EMEA Ltd.**  
**Representation Office in Russia**  
Tverskaya str. 16/2, bld. 1, 7th floor,  
Moscow 125009, Russia  
Phone: +7-495-363-1694  
Fax: +7-495-935-8962

### • Spain

**Anritsu EMEA Ltd.**  
**Representation Office in Spain**  
Paseo de la Castellana, 141.  
Planta 5, Edificio Cuzco IV  
28046, Madrid, Spain  
Phone: +34-91-572-6761

### • Austria

**Anritsu EMEA GmbH**  
Am Belvedere 10, A-1100 Vienna, Austria  
Phone: +43-(0)1-717-28-710

### • United Arab Emirates

**Anritsu EMEA Ltd.**  
**Anritsu A/S**  
Office No. 164, Building 17, Dubai Internet City  
P. O. Box - 501901, Dubai, United Arab Emirates  
Phone: +971-4-3758479

### • India

**Anritsu India Private Limited**  
6th Floor, Indiqube ETA, No.38/4, Adjacent to EMC2,  
Doddanekundi, Outer Ring Road,  
Bengaluru - 560048, India  
Phone: +91-80-6728-1300  
Fax: +91-80-6728-1301

### • Singapore

**Anritsu Pte. Ltd.**  
11 Chang Charn Road, #04-01, Shriro House  
Singapore 159640  
Phone: +65-6282-2400  
Fax: +65-6282-2533

### • Vietnam

**Anritsu Company Limited**  
16th Floor, Peakview Tower, 36 Hoang Cau Street,  
O Cho Dua Ward, Dong Da District, Hanoi, Vietnam  
Phone: +84-24-3201-2730

### • P.R. China (Shanghai)

**Anritsu (China) Co., Ltd.**  
Room 2701-2705, Tower A, New Caohejing  
International Business Center No. 391 Gui Ping Road  
Shanghai, 200233, P.R. China  
Phone: +86-21-6237-0898  
Fax: +86-21-6237-0899

### • P.R. China (Hong Kong)

**Anritsu Company Ltd.**  
Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,  
No. 1 Science Museum Road, Tsim Sha Tsui East,  
Kowloon, Hong Kong, P.R. China  
Phone: +852-2301-4980  
Fax: +852-2301-3545

### • Japan

**Anritsu Corporation**  
8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016  
Japan  
Phone: +81-46-296-6509  
Fax: +81-46-225-8352

### • South Korea

**Anritsu Corporation, Ltd.**  
5FL, 235 Pangyoeyeok-ro, Bundang-gu, Seongnam-si,  
Gyeonggi-do 13494, South Korea  
Phone: +82-31-696-7750  
Fax: +82-31-696-7751

### • Australia

**Anritsu Pty. Ltd.**  
Unit 20, 21-35 Ricketts Road,  
Mount Waverley, Victoria 3149, Australia  
Phone: +61-3-9558-8177  
Fax: +61-3-9558-8255

### • Taiwan

**Anritsu Company Inc.**  
7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan  
Phone: +886-2-8751-1816  
Fax: +886-2-8751-1817

List Revision Date: 20210610