

14AWG 4C AUDIO CABLE DIRECT BURIAL (105 STRAND)




DESCRIPTION

14AWG, 4 Conductor, High Strand Audio Cable, (105 Strand), Direct Burial Cable, UV Rated Outer Jacket, Spool, 500ft.

FEATURES

- Suitable for Direct Burial
- Durable Weather Resistant Jacket
- UV Rated Outer Jacket
- High-Strand Oxygen Free
- Bare Copper Conductors
- ETL Listed, RoHS Compliant

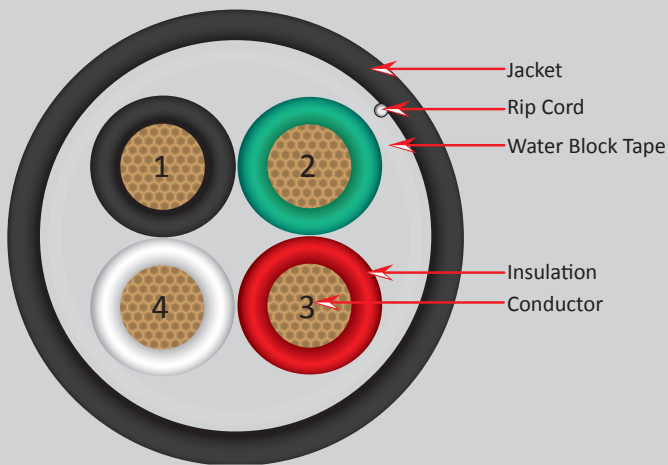

SKU: 209-2321/DB

Conductor	4 Core (Stranded BC)
Material	Oxygen Free Copper Wire Strands
Size	14AWG
Stranding	105 Strands
Strand Diameter	0.16 mm
Insulation	
Material	SRPVC
Average Thickness	0.36 mm
Min. Point Thickness	0.33 mm
Diameter (±0.05mm)	2.60 mm
Water Block Tape	Yes
Jacket	
Material	PE (UV)
Color	Black
Average Thickness	0.95 mm
Min. Point Thickness	0.88 mm
Outer Diameter (±0.1mm)	8.20 mm
Insulation Color	Black, Red, Green, White
Ripcord	
Material	Nylon (150D)
Electrical Performance	
Rated Temperature	-20°C - 75°C
Rated Voltage	300V
Reference Standard	ETL Listed
Mechanical Characteristics	
Test Object	Jacket
Test Material	PE
Before Tensile Strength (Mpa)	>=13.8
Aging Elongation (%)	>=100
Aging Condition (°Cxhrs)	100x168
After Tensile Strength (Mpa)	>=85% of unaged
Aging Elongation (%)	>=50% of unaged
Cold Bend (-20±2° Cx4hrs)	No Crack

Marking on Jacket

VERTICAL 4003289 cETLus AUDIO CABLE 14 AWG 4 COND 105 STRANDED OXYGEN FREE OUTDOOR UV DIRECT BURIAL RoHS XXXFT

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 09/2016

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.