

14AWG 4 CONDUCTOR STRANDED (41 STRAND)




DESCRIPTION

14AWG, 4 Conductor, Stranded (41 Strand),
PVC Jacket, Pull Box, 500ft.

APPLICATION

- Intercom Systems
- Sound / Audio
- Indoor Applications

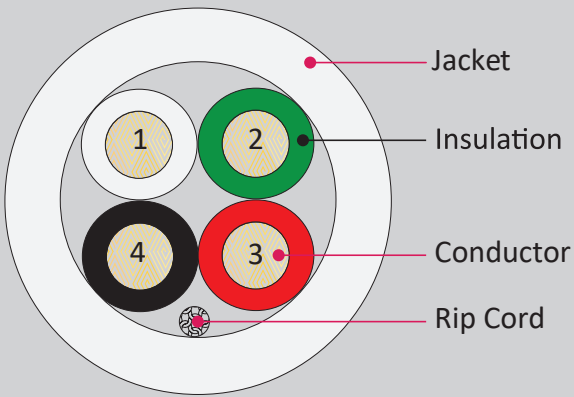

SKU: 209-2321

Conductor	4 Core (Stranded BC)
Material	Oxygen Free Copper Wire Strands
Size	14 AWG
Stranding	41 Strand
Strand Diameter	0.254 mm
Insulation	
Material	PVC
Average Thickness	0.36 mm
Min. Point Thickness	0.33 mm
Diameter (±0.05mm)	2.60 mm
Assembly Diameter (±0.05mm)	6.20mm
Jacket	
Material	PVC
Color	White
Average Thickness	0.80 mm
Min. Point Thickness	0.72 mm
Outer Diameter (±0.1mm)	8.00 mm
Insulation Color	Black, Red, Green, White
Ripcord	
Material	Nylon (150D)
Electrical Performance	
Rated Temperature (°C)	75
Voltage Rating	30V
Reference Standard	ETL, CMR, CL3
Mechanical Characteristics	
Test Object	Jacket
Test Material	PVC
Before Tensile Strength (Mpa)	>=13.8
Aging Elongation (%)	>=100
Aging Condition (°Cxhrs)	100x168
After Tensile Strength (Mpa)	>=85% of unaged
Aging Elongation (%)	>=50% of unaged
Cold Bend (-20±2° Cx4hrs)	No Crack

Marking on Jacket

VERTICAL 4001453 cETLus AUDIO CABLE 14 AWG 4 COND 41
STRANDED OXYGEN FREE SUN RES CMR FT4 CL3 RoHS XXXFT

VERTICAL CABLE

954 454-3554 Florida Office

951 696-7772 California Office



www.verticalcable.com

Rev. 01/2013

Subject to change without notice.