

14AWG 4 CONDUCTOR STRANDED (41 STRAND)




DESCRIPTION

14AWG, 4 Conductor, Stranded (41 Strand),
PVC Jacket, 500ft Pull Box or 1000ft Wooden
Spool

APPLICATION

- Intercom Systems
- Sound / Audio
- Indoor Applications

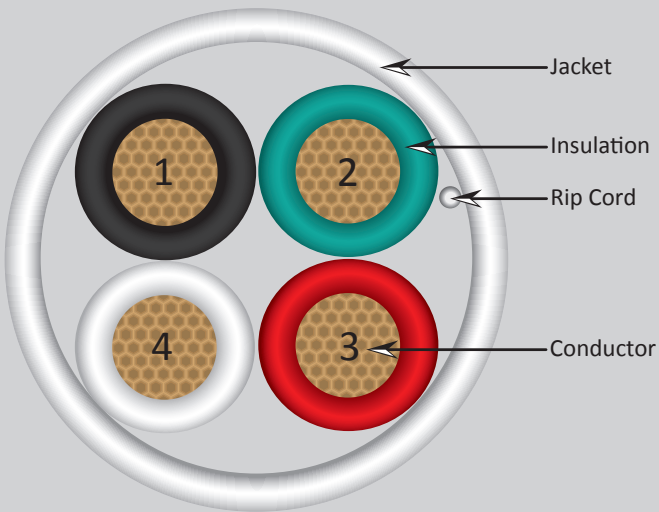

SKU: 209-2321, 2321/BK, 2323

Conductor	4 Core (Stranded BC)
Material	Oxygen Free Copper Wire Strands
Size	14 AWG
Stranding	41 Strand
Strand Diameter	0.254 mm

Insulation	
Material	PVC
Average Thickness (mm)	0.36
Min. Point Thickness (mm)	0.33
Insulation Diameter (± 0.05 mm)	2.60

Assembly Diameter (± 0.05 mm)	6.20
---	------

Jacket	
Material	PVC
Color	White or Black
Average Thickness (mm)	0.80
Min. Point Thickness (mm)	0.72
Outer Diameter (± 0.1 mm)	8.00

Insulation Color	Black, Red, Green, White
-------------------------	--------------------------

Ripcord	
Material	Nylon (150D)

Electrical Performance	
Rated Temperature ($^{\circ}$ C)	75
Voltage Rating	300V
Reference Standard	ETL, CMR, CL3

Mechanical Characteristics	
Test Object	Jacket
Test Material	PVC
Before Tensile Strength (Mpa)	≥ 13.8
Aging Elongation (%)	≥ 100
Aging Condition ($^{\circ}$ Cxhrs)	100x168
After Tensile Strength (Mpa)	$\geq 85\%$ of unaged
Aging Elongation (%)	$\geq 50\%$ of unaged
Cold Bend ($-20 \pm 2^{\circ}$ Cx4hrs)	No Crack

Marking on Jacket
VERTICAL 4001453 cETLus AUDIO CABLE 14 AWG 4 COND 41 STRANDED
OXYGEN FREE CMR FT4 CL3 RoHS XXXFT

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 10/2016

Specs subject to change without notice.

It is the sole responsibility of the user to have the most current specs.