

AUDIO CABLE

14 AWG 4 CONDUCTOR

STRANDED CABLE (SHIELDED)




DESCRIPTION

14 AWG 4 Conductor Stranded Bare Copper, Shielded with an overall jacket.

APPLICATION

- Sound and Audio
- Intercom Systems
- Indoor Applications

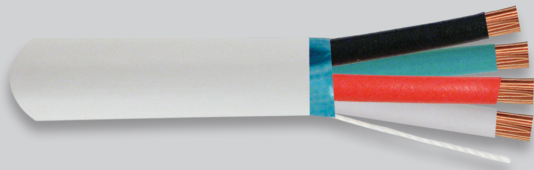

209-2351/S/5WH

Part Number:	Description:
209-2351/S/5WH	Audio Cable, Stranded, Shielded, 14 AWG 4 C, White 500 ft.

CONSTRUCTION

Conductor count:	4
Shape:	Round
Rip cord:	Yes
PE Tape:	Yes
Drain Wire (TC):	7/0.20
Aluminum Foil:	Yes

CONDUCTORS

Material:	Stranded bare copper
Trade size:	14 AWG
Stranding:	105/0.16 mm
Insulation material:	Polyvinyl Chloride (PVC)
Insulation O.D.:	0.10 in. (2.60 mm)
Insulation color:	Red, Black, White, Green

JACKET

Material:	Polyvinyl Chloride (PVC)
Thickness:	0.03 in. (0.80 mm)
O.D.:	0.32 in. (8.20 mm)
Marking:	VERTICAL 4002107 c(ETL)us AUDIO CABLE 14AWG 4 COND 105 STRANDED SHIELDED OXYGEN FREE CMR CL3R RoHS V2094P13073 XXXFT

MECHANICAL


Temperature rating:	75° C
Before Tensile Strength (Mpa):	≥13.8
Aging Elongation (%):	≥100
Aging Condition (°Cxhrs):	100x168
After Tensile Strength (Mpa):	≥85% of unaged
Aging Elongation (%):	≥50% of unaged
Cold Bend (-20±2° Cx4hrs):	No Crack

SAFETY

NFPA 70 (NEC®) rating:	CMR/CL3
Voltage rating:	300 V RMS

PACKED WEIGHT

209-2351/S/5WH:	43.5 lb (19.7 kg)
-----------------	-------------------

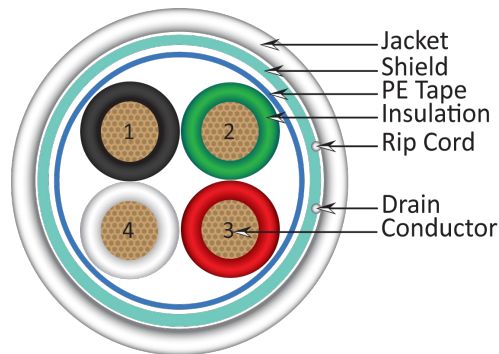

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 11/2023

Subject to change without notice.