

ALARM-SECURITY CABLE

22 AWG 6 CONDUCTOR
STRANDED (SHIELDED)



210-226ST/S SERIES


Part Number:	Description:
210-226ST/S/5GY	Security Cable, Stranded, Shielded, 22 AWG 6 C, 500 ft, Gray
210-226ST/S/5WH	Security Cable, Stranded, Shielded, 22 AWG 6 C, 500 ft, White
210-226ST/S/GY	Security Cable, Stranded, Shielded, 22 AWG 6 C, 1000 ft, Gray
210-226ST/S/WH	Security Cable, Stranded, Shielded, 22 AWG 6 C, 1000 ft, White

DESCRIPTION

22 AWG 6 Conductor Stranded Bare Copper, CM/CL2, Shielded with an overall jacket.

APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Door Controllers
- Key Pads
- Smoke Detectors

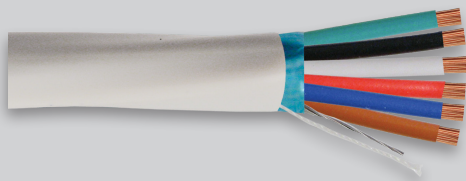

CONSTRUCTION

Conductor count:	6
Shape:	Round
Drain Wire (TC):	7/0.20
Rip cord:	Yes
Aluminum Foil:	Yes
PE Tape:	Yes

CONDUCTORS

Material:	Stranded bare copper
Trade size:	22 AWG
Diameter:	7 Strand (7x0.24mm)
Insulation material:	Polyvinyl Chloride (PVC)
Insulation O.D.:	0.04 in. (1.10 mm)
Insulation color:	Red, Black, White, Green, Blue, Brown

JACKET

Material:	Polyvinyl Chloride (PVC)
Thickness:	0.02 in. (0.45 mm)
O.D.:	0.19 in. (4.80 mm)
Marking:	VERTICAL 4001453 cETLus CM/CL2 22AWG 6C STRANDED SHIELDED 75C RoHS V1379P13342 XXXXFT

MECHANICAL


Temperature rating:	75° C
---------------------	-------

SAFETY

NFPA 70 (NEC®) rating:	CM/CL2
Voltage rating:	300 V RMS

PACKED WEIGHT

210-226ST/S/5GY	13.3 lb (6 kg)
210-226ST/S/5WH	14 lb (6.4 kg)
210-226ST/S/GY	28 lb (12.7 kg)
210-226ST/S/WH	28 lb (12.7 kg)

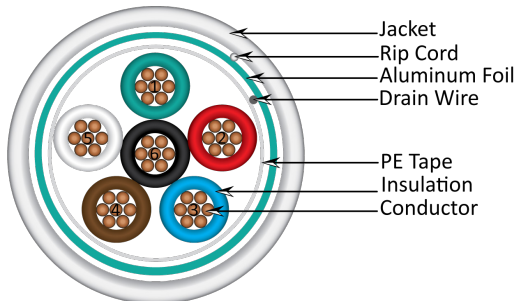

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 10/2023

Subject to change without notice.