


DESCRIPTION

12/2 Stranded Bare Copper Conductors, Unshielded with an overall jacket. Plenum Rated, 500ft Pull Box

FEATURES

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications
- Supplied in a 500ft Pull Box

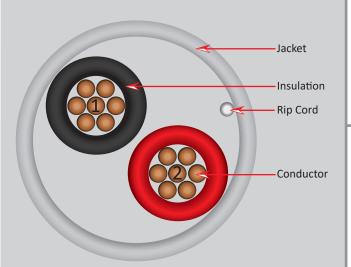

12AWG 2 CONDUCTOR PLENUM RATED

SKU: 211-122/P/5WH

Conductor

Material Bare Copper Size 12AWG Stranding 19 Strand

(19x0.0185 in, 19x0.47mm)

Conductors 2 Conductor

Insulation

Material PL-PVC

Thickness $0.114 \text{ in } \pm 0.004 \text{ in } (2.9 \text{mm})$

Colors Black, Red

Ripcord Yes

Jacket

Material PL-PVC

Thickness 0.015 in (0.38mm) Nominal Overall Diameter 0.256 in ± 0.008 in (6.5±0.2mm)

Color White

Electrical Properties

Temp. Rating -20°C ~ + 75°C

DCR Conductor 5.41 Ohms/Km. @ 20°C

Ratings/Approvals

CMP(UL), C(UL), RoHS Compliant







VERTICAL CABLE

951.696.7772 California 800.749.2447 Florida 845.391.8318 New York