

14AWG 4 CONDUCTOR PLENUM RATED (CMP)




DESCRIPTION

14/4 Stranded Bare Copper Conductors, Unshielded with an overall jacket. Plenum Rated, 500ft or 1000ft, Pull Box

APPLICATION

- Intercom Systems
- Security Systems
- Sound and Audio
- Power Limited Control Circuits
- Indoor Applications

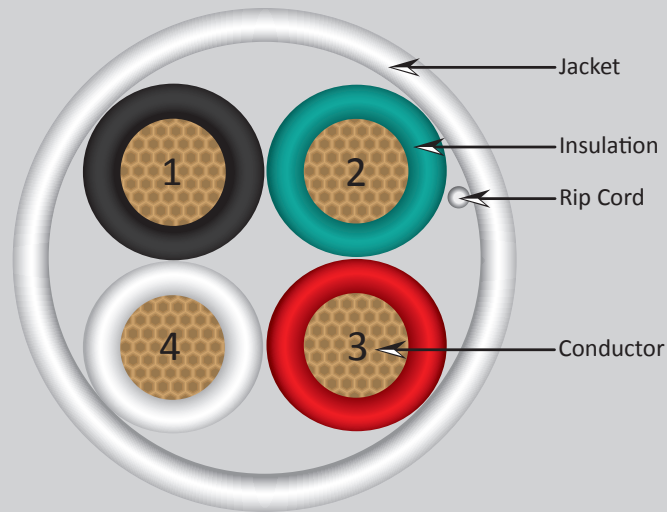

SKU: 211-144/P/5WH
211-144/P/WH

Conductor

Material	Bare Copper
Size	14AWG
Stranding	7 Strand
Conductors	4 Conductor

Insulation

Material	Plenum Polymer
Thickness	0.009 in. (0.228mm) Nominal
Colors	Black, Red, White, Green

Jacket

Material	Plenum Polymer
Thickness	0.015 in. (0.381mm) Nominal
Overall Diameter	0.247 in. (6.273mm) Nominal
Color	White

Electrical & Physical Properties

Voltage	150V RMS
DC Resistance per Conductor	@ 20°C 2.6Ω/1m'
Maximum pulling tension	168lbs
Min. Bend Radius	2.6 in

Ratings/Approvals

NEC Article 725, UL Subject 13, Type CL2P FT6, c(ETL)US or c(UL)us, RoHS Compliant

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 11/2014

Specs subject to change without notice.
It is the sole responsibility of the user to have the most current specs.