


**BITCOIN**  
ONLY

# Seed Backup Guide




A STEP-BY-STEP GUIDE  
To make your own seed backups at home

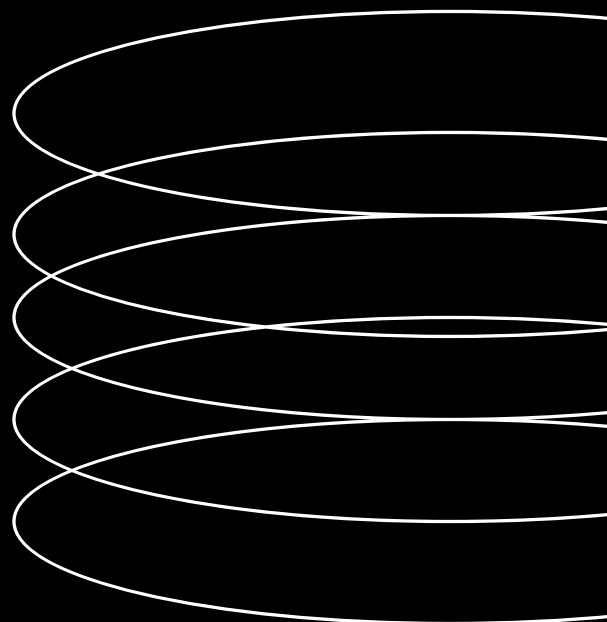

# Before you start




## THE BLOCKMIT JIG

The Jig is a 3D printed plastic device which allows you to neatly stamp letters and numbers onto steel washers.

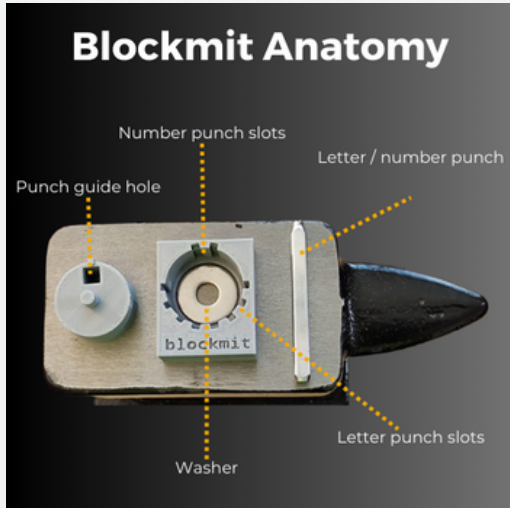

The Jig has two fundamental functions, stamping letters and numbers.

Please pay attention to which section of the Jig is used for letters and which is for numbers.

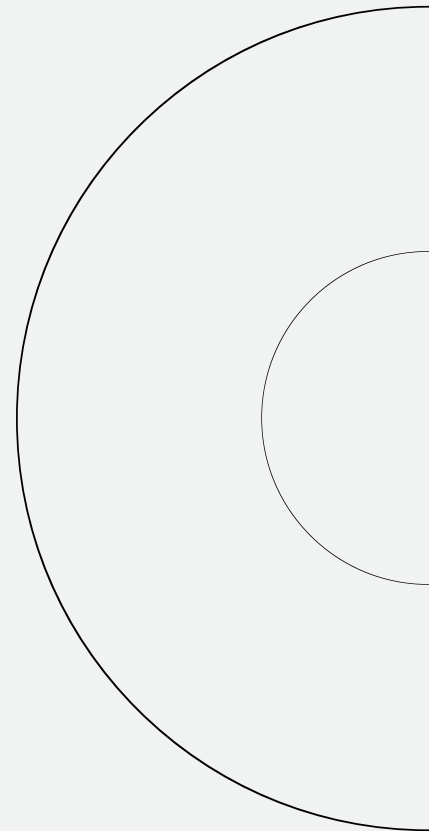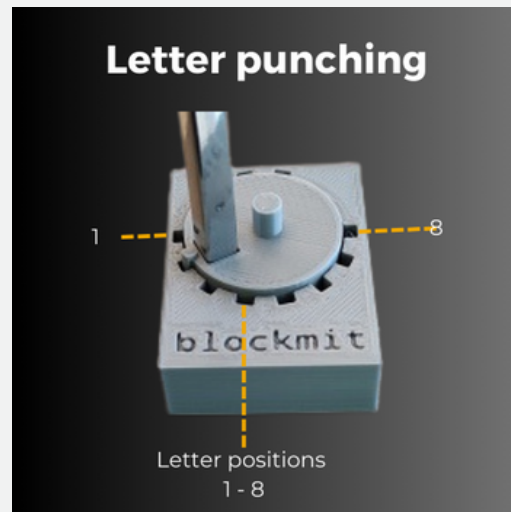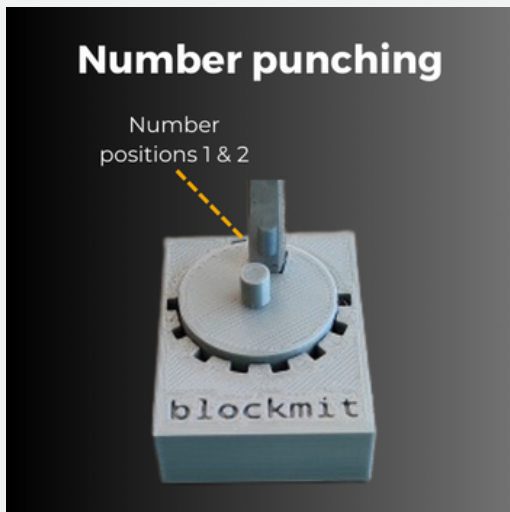


## Which kit are you using?

[Navigate to - Starter kit](#)

[Navigate to - DIY or Uncle Jim Kit](#)

GUIDE TO THE BITCOIN ONLY SEED BACKUP

# Starter Kit

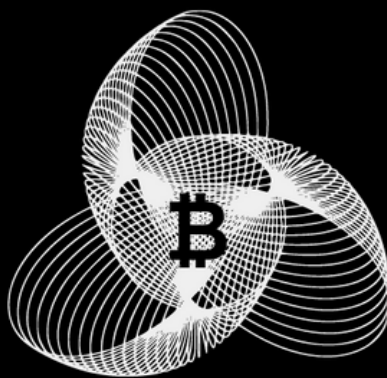


**BITCOIN**  
ONLY

# Using the Starter Kit

*Note: This kit uses pre-numbered washers*

1


Write your seed words on a piece of paper, ensure that they are numbered correctly

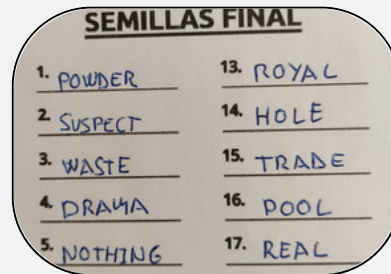

2

Place washer #1 in the Blockmit Jig.

*Tip: stick a piece of tape across the bottom of the jig to hold the washer in place securely*

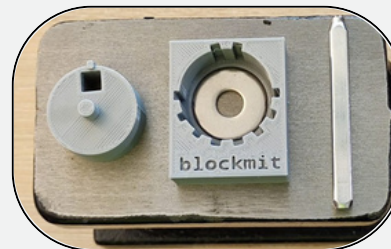


3

Using seed word #1, locate the correct letter punches to create this word



4

Place the Jig Guide in the Jig in letter position 1

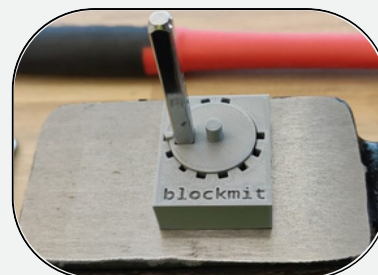

# Using the Starter Kit



5

Insert the letter punch for the first letter

6

Tap the letter punch with a hammer several times

7

Remove Jig Guide and check to see if the letter has been clearly etched.

If not clear, re-insert the jig guide and tap the letter punch a few more times with the hammer. Repeat until the letter is clearly etched.

Once letter is clearly etched, move to next step

8

Move Jig Guide to letter position 2

9

Insert the letter punch which corresponds with the second letter of your seed word

10

Repeat steps 6 and 7



# Using the Starter Kit

11

Continue process until the entire seed word has been etched into washer #1



12

Remove the washer and replace it with washer #2


13

Repeat process until all seed words have been etched onto your washers




14

Using your 13th or 25th washer, which has intentionally been left un-numbered, etch a name for your seed words set.



GUIDE TO THE BITCOIN ONLY SEED BACKUP

# DIY & Uncle Jim Kits

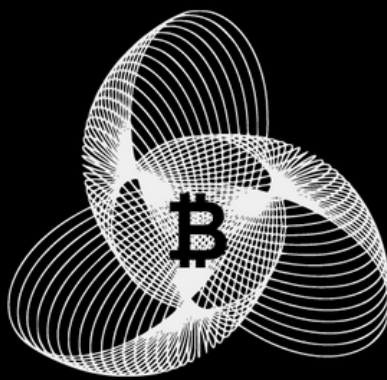

**BITCOIN**  
ONLY


# Using the DIY or Uncle Jim kits

*Note: These kits use blank washers and thus require both number and letter punching.*

## Part 1: Number punching


1

Write your seed words on a piece of paper, ensure that they are numbered correctly

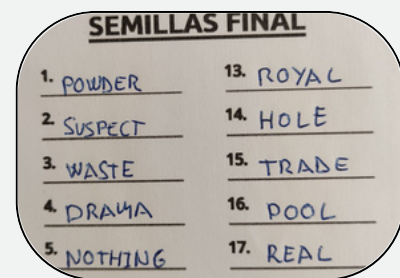

2

Place a blank washer in the Blockmit Jig.  
*Tip: stick a piece of tape across the bottom of the jig to hold the washer in place securely*

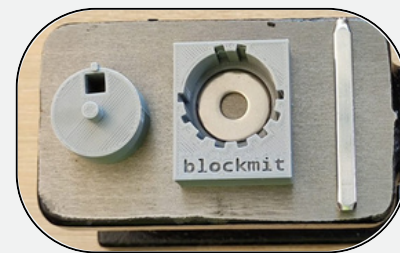

3

This washer will be used for seed word #1, locate Number Punch 1



4

Place the Jig Guide in Number position 1.






# Using the DIY or Uncle Jim kits

5

Insert Number Punch 1 at position 1



6

Tap the number punch with a hammer several times

7

Remove Jig Guide and check to see if the number has been clearly etched  
If not clear, re-insert the jig guide and tap the number punch a few more times with the hammer. Repeat until the number is clearly etched  
Once number is clearly etched, move to next step

8


Etch all numbers required (12 or 24) using the process in steps 1 - 7

# Using the DIY or Uncle Jim kits

## Part 2: Letter punching

9

Place washer #1 in the Blockmit Jig. Tip: stick a piece of tape across the bottom of the jig to hold the washer in place securely

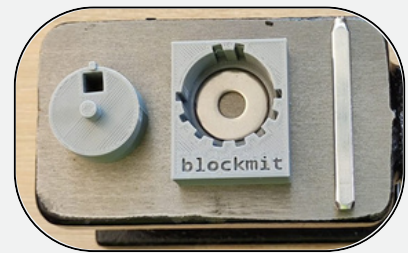


10

Using seed word #1, locate the correct letter punches to create this word

11

Place the Jig Guide in the Jig in letter position 1

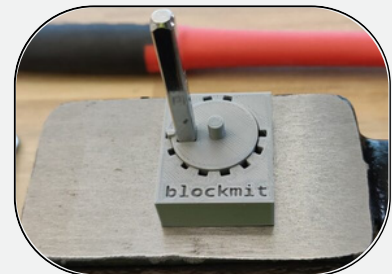

12

Insert the letter punch for the first letter

13

Tap the letter punch with a hammer several times

# Using the DIY or Uncle Jim kits

14

Remove Jig Guide and check to see if the letter has been clearly etched  
If not clear, re-insert the jig guide and tap the letter punch a few more times with the hammer. Repeat until the letter is clearly etched  
Once letter is clearly etched, move to next step

15

Move Jig Guide to letter position 2

16

Insert the letter punch which corresponds with the second letter of your seed word

17

Repeat steps 13 and 14

18

Continue process until the entire seed word has been etched into washer #1



# Using the DIY or Uncle Jim kits

19

Remove the washer and replace it with washer #2

20

Repeat process until all seed words have been etched onto your washers



21

Using your 13th or 25th washer, which has intentionally been left unnumbered, etch a name for your seed words set.

