

Living Wall Planter Base Assembly Instructions



Includes: 1 Base Unit, 2 Legs, 4 Screws, 4 Washers
Requires: 1 Philips Screwdriver

Part 5604-00100A-79-81

1.



Remove all items from the packaging and check you have the following:

1 Base Unit
2x Legs
4x Screws
4x Washers

Place the Base unit on it's side, long side down.

3.



Repeat step 2 for the other set of legs on the other end of the planter base.

2.



Have a screw with washer already on ready.

Align top of 1 set of legs with the holes located in the bottom of one end of the planter base.

Insert screw into one of the holes and finger-tighten.

Repeat for other hole on same set of legs.

4.



Lift planter base, with legs now attached, into upright position.

With your screwdriver, go around to each screw and tighten until the screw will turn no more. Do not overtighten.

Available Accessories for Wall Planter Base



Wall Planter Extension Kit
(5604-00200A-79-81)


Possible Configurations (up to 4 units tall):



1027 Industrial Place, P.O. Box 179
St. Clements, Ontario N0B 2M0
T: 800-663-2803
www.rtscompaniesinc.com


2900 Industrial Park Dr
Austinburg, OH, 44010
T: 888-641-3077

Living Wall Planter **Extension Kit** Assembly Instructions

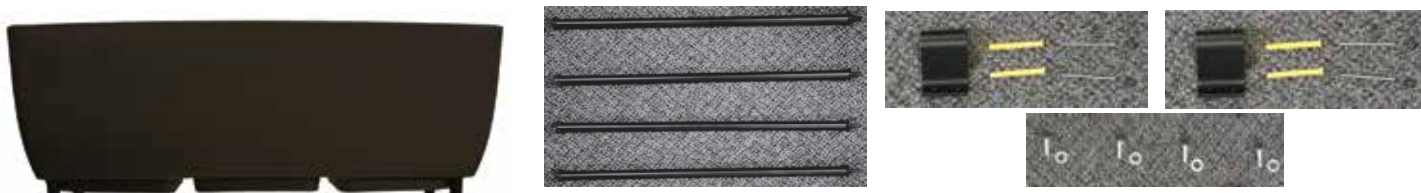

Includes: 1 Extension Unit, 4 Extension Legs, 2 Wall Anchors, 4 Screws, 4 Washers, 4 Wall Anchor Screws/Plugs/Washers
Requires: 1 Philips Screwdriver, 1 Powerdrill, 1 Drill Bit, 1 Stepladder

1.




Remove all items from the packaging and check you have all that is indicated above.

Remove base legs from base unit if they are still attached.

Place the base unit on it's side, long side down.

2.



Have a screw with washer already on ready.

Align top of 1 set of extension legs with the holes located in the bottom of one end of the extension planter unit.

Insert screw into one of the holes and finger-tighten.

Repeat for other hole on same set of legs.

2.



Have 2 extension legs ready.

Align top of 1 set of base legs with the holes located in the bottom of one end of the planter base.

Insert threaded end of one of the extension legs into one of the holes and hand-tighten (do not over-tighten).

Repeat for other hole on same set of legs.

4.



With completed unit still laying down and using your screwdriver, go around to each screw in the inside of the last extension planter unit and tighten until the screw will turn no more. Do not overtighten.


3.



Repeat step 2 for the other set of extension legs on the other end of the planter base.

If you are configuring 2 or 3 extension kits, repeat steps 2 and 3 for each.


4.



With assistance, stand completed unit in desired location. With 1 person holding the unit in place, the other can place the anchors halfway up each extension leg and mark out locations to be pre-drilled in the wall.

Do this for each anchor - each extension leg nearest the wall requires 1 anchor.

4.



After anchor holes are -pre-drilled, each anchor can be set with the included plug (if required), washer, and screw.

