

Category 6A IP68 Coupler Modules

- 250-ICP68-A1A2 Coupler Module for Regular 8P8C Plugs, Socket-to-Socket, CAT6A STP, IP68
- 250-ICP68-B1A2 Coupler Module for 250-ITM68-A2A2/B1A2 Terminal Modules, Socket-to-Socket, CAT6A STP, IP68
- 250-ICP68-C1A2 Coupler Module, IDC-to-IDC Splice, CAT6A STP, Panel Mounting, IP68



CHARACTERISTICS

- Transmission performance: category 6A per ANSI/TIA-568.2-D;
category 6A per ISO IEC 11801.
- Wiring schemes: T568A/T568B.
- Conductor gauge: solid: 22–24 AWG.
- Environmental protection: IP68.
- Housing: IEC 61076-3-106 variant 01 style 2;
IEC 60529.
- Locking mechanism: bayonet.




Category 6A IP20 Coupler Modules

- 250-ICP20-C1A2 Coupler Module, IDC-to-IDC Splice, Compact, CAT6A STP, Panel Mounting, IP20
- 250-ICP20-C2A2 Coupler Module, IDC-to-IDC Splice, Standard, CAT6A STP, Panel Mounting, IP20

CHARACTERISTICS

- Transmission performance: category 6A per ANSI/TIA-568.2-D;
category 6A per ISO IEC 11801.
- Wiring schemes: T568A/T568B.
- Conductor gauge: solid: 22–26 AWG.
- Environmental protection: IP20.
- Housing: Zinc alloy, nickel plating.

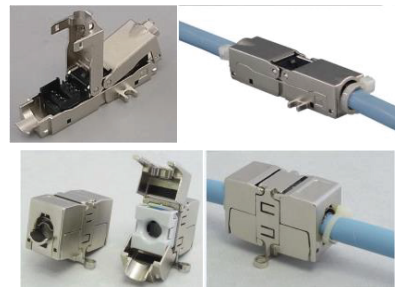

OF Adapter IP68 Coupler Modules

- 250-ICP68-D4Z2 Coupler Module, OF Adapter, LC DX, Blue, Panel Mounting, IP68
- 250-ICP68-D4Y2 Coupler Module, OF Adapter, LC DX, Green, Panel Mounting, IP68
- 250-ICP68-D4C2 Coupler Module, OF Adapter, LC DX, Aqua, Panel Mounting, IP68



CHARACTERISTICS

- Format: LC DX.
- Fiber types: SM 9/125, MM 50/125, MM 62.5/125
- Plug types: UPC, APC.
- Adapter sleeves: Zirconia ceramic, split.
- Insertion loss (IL): 0.3 dB or lower (when used with standard-compliant plugs).
- Return loss (RL): UPC: -55 dB or better (when used with standard-compliant plugs);
APC: -65 dB or better (when used with standard-compliant plugs).
- Interface standard: SC: IEC 61754-4;
LC: IEC 61754-20.
- Compatibility: GR-326-CORE.
- Adapter compliance: Regulation (EC) No 1907/2006 (REACH);
Directive 2011/65/EU Am. 2015/863/EU (RoHS2);
UL 94 V-0.
- Environmental protection: IP68.
- Housing: IEC 61076-3-106 variant 01 style 2;
IEC 60529.
- Locking mechanism: bayonet.

ACCESSORIES

- 250-ICP68-0A-10 Sealing Gasket for 250-ICP68-A/C/D Coupler Modules, Internal, Rubber, Pack of 10
- 250-ICP68-0B-10 Sealing Gasket for 250-ICP68-A/C/D Coupler Modules, External, Rubber, Pack of 10
- 250-ICP68-0C0A Surface Mounting Bracket for 250-ICP68-A/C/D Coupler Modules, 1-position
- 250-ICP68-0C0B Surface Mounting Bracket for 250-ICP68-A/C/D Coupler Modules, 2-position
- 250-ICP68-0C0C Surface Mounting Bracket for 250-ICP68-A/C/D Coupler Modules, 3-position
- 250-ICP68-0C1A DIN-Rail Mounting Bracket for 250-ICP68-A/C/D Coupler Modules, 1-position
- 250-ICP68-0C1B DIN-Rail Mounting Bracket for 250-ICP68-A/C/D Coupler Modules, 2-position
- 250-ICP68-0C1C DIN-Rail Mounting Bracket for 250-ICP68-A/C/D Coupler Modules, 3-position

