
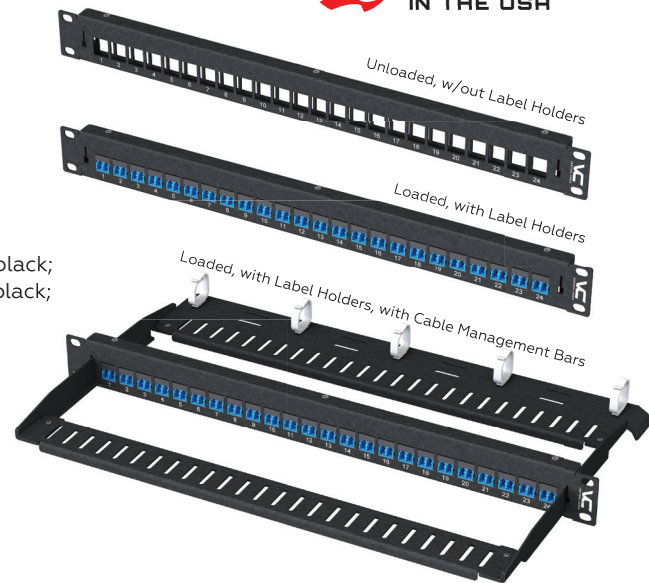


Keystone Module Panels

- 266-PKM02-24000 Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position, Unloaded, w/o Label Holders
- 266-PKM02-24Axx Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position, White Bezels, w/o Label Holders
- 266-PKM02-24Bxx Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position, Black Bezels, w/o Label Holders
- 266-PKM03-24000 Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position, Unloaded, Label Holders
- 266-PKM03-24Axx Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position, White Bezels, Label Holders
- 266-PKM03-24Bxx Optical Fiber Rack-Mount Panel, Keystone-Module, 1-RMU, 24-Position, Black Bezels, Label Holders

CHARACTERISTICS

- Form-factor: 19-in rack/cabinet mounting standard (EIA-ECA-310-E).
- Capacity: twenty-four keystone modules; up to 24 optical fibers (FC, ST, SC SX adapters); up to 48 optical fibers (LC DX adapters).
- Materials: 1.5-mm (16-GA) CRS; black powder coating.
- Cable management: front and rear, removable, interchangeable.
- Labeling: four plastic label holders, plain-paper label inserts.
- Rack mounting: set of USCU fasteners: 4 × #10-32 × 5/8 cross-recessed pan-head machine screws, black; 4 × #12-24 × 5/8 cross-recessed pan-head machine screws, black; 4 × #12 × 9/16 × 3/8 plain round washers, nylon, black.
- Environmental: operating temperature: -20 °C–+70 °C (-4 °F–+158 °F); operating humidity: ≤95 % RH non-condensing.
- Dimensions: W: 485 mm (19 in); H: 44.5 mm (1.75 in) [1 RMU]; D: 15 mm (0.6 in).
- Weight: 0.6 kg



Panels with Black Bezels

		BLUE	GREEN	AQUA	H. VIOLET
FC	24 modules 24 fibers	 266-PKM02-24B10	 266-PKM02-24B3Z	 266-PKM02-24B3C	—
ST	24 modules 24 fibers	 266-PKM02-24B20	 266-PKM02-24B4Y	 266-PKM02-24B4C	 266-PKM02-24B4D
SC SX	24 modules 24 fibers	 266-PKM02-24B3Z	 266-PKM02-24B3Y	 266-PKM02-24B3C	—
LC DX	24 modules 48 fibers	 266-PKM02-24B4Z	 266-PKM02-24B4Y	 266-PKM02-24B4C	 266-PKM02-24B4D

Panels with White Bezels

		BLUE	GREEN	AQUA	H. VIOLET
FC	24 modules 24 fibers	 266-PKM02-24A10	 266-PKM02-24A3Y	 266-PKM02-24A3C	—
ST	24 modules 24 fibers	 266-PKM02-24A20	 266-PKM02-24A4Y	 266-PKM02-24A4C	 266-PKM02-24A4D
SC SX	24 modules 24 fibers	 266-PKM02-24A3Z	 266-PKM02-24A3Y	 266-PKM02-24A3C	—
LC DX	24 modules 48 fibers	 266-PKM02-24A4Z	 266-PKM02-24A4Y	 266-PKM02-24A4C	 266-PKM02-24A4D

* All adapters are equipped with zirconia-ceramic split sleeves compatible with MM and SM fibers.

Keystone modules with adapters of other colors are available as special orders, minimum order quantity – equivalent of 96 keystone modules of each color.