

# CE

## **Model Number**

GD18/GV18/59/73/82b/103

#### Thru-beam sensor

with 4-pin, M12 x 1 plastic connector


#### **Features**

- Efficient Line in a short M18 plastic ٠ housing for standard applications
- Very high detection range ٠
- 4 LEDs indicator for 360° visibility ٠
- Version with front optical face
- DC voltage version ٠

## **Product information**


The GLV/GLK18 series sensors help improve the efficiency of machines and systems. The design of the M18 plastic housing, the connection technology, and sensor properties are highly standardized. Concentrating on the key sensor requirements has produced a robust and reliable product series for DC and AC/DC voltage systems without any overengineering. The mounting set included in the scope of delivery and the optimized potentiometer design ensure fast assembly and easy configuration.

Dimensions





## **Electrical connection**






#### **Pinout**



## Indicators/operating means



1	Operating display green		
2	Signal display yellow		
4	Emitter	•	
5	Receiver		

Subject to modifications without notice Pepperl+Fuchs Group www.pepperl-fuchs.com

USA: +1 330 486 0001 fa-info@us.pepperl-fuchs.com

Germany: +49 621 776-4411 fa-info@pepperl-fuchs.com

Copyright Pepperl+Fuchs Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS



## **Technical data**

roomiour uulu		
System components		
Emitter		GD18/159
Receiver		GV18/59/73/82b/103
General specifications		
Effective detection range		0 20 m
Threshold detection range		25 m
Light source		LED
Light type		modulated visible red light , 640 nm
Diameter of the light spot		approx. 1300 mm at 25 m
Angle of divergence		approx. 3 °
Optical face		frontal
Ambient light limit		30000 Lux
Functional safety related paramet	ters	
MTTF <sub>d</sub>		630 a
Mission Time (T <sub>M</sub> )		20 a
Diagnostic Coverage (DC)		0 %
Indicators/operating means		
Operating display		LED green, statically lit Power on
Function display		Receiver: LED yellow, lights up when light beam is free, flashes when falling short of the stability control ; OFF when light beam is interrupted
Electrical specifications		
Operating voltage	U <sub>B</sub>	10 30 V DC
No-load supply current	I <sub>0</sub>	< 20 mA
Output		
Pre-fault indication output		1 PNP, inactive when falling short of the stability control
Switching type		dark on
Signal output		1 PNP, short-circuit protected, open collector
Switching voltage		max. 30 V DC
Switching current		max. 100 mA
Voltage drop	U <sub>d</sub>	≤ 1.5 V DC
Switching frequency	f	500 Hz
Response time		≤ 1 ms
Ambient conditions		
Ambient temperature		-25 60 °C (-13 140 °F)
Storage temperature		-40 70 °C (-40 158 °F)
Mechanical specifications		
Protection degree		IP67
Connection		connector M12 x 1, 4-pin
Material		
Housing		PC
Optical face		РММА
Connector		plastic
Mass		approx. 10 g per device
Compliance with standards and d ves Standard conformity	lirecti-	
Product standard		EN 60947-5-2:2007
		IEC 60947-5-2:2007
Approvals and certificates		
Protection class		II, rated insulation voltage $\leq$ 250 V AC with pollution degree 1-2 according to IEC 60664-1
UL approval		cULus Listed, Class 2 Power Source, Type 1 enclosure
CCC approval		Products with a maximum operating voltage of ≤36 V do not bear a CCC marking because they do not require approval.

#### Accessories

CPZ18B03 Mounting Bracket with swivel nut

**BF 18** Mounting flange, 18 mm

BF 18-F Mounting flange with dead stop, 18 mm

#### BF 5-30 Universal mounting bracket for cylindrical

sensors with a diameter of 5 ... 30 mm

V1-G-2M-PUR Cable socket, M12, 4-pin, PUR cable

#### V1-W-2M-PUR

Cable socket, M12, 4-pin, PUR cable

Other suitable accessories can be found at www.pepperl-fuchs.com


2


Copyright Pepperl+Fuchs Singapore: +65 6779 9091 fa-info@sg.pepperl-fuchs.com



fa-info@us.pepperl-fuchs.com

## **Curves/Diagrams**

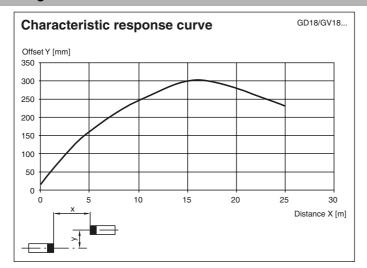

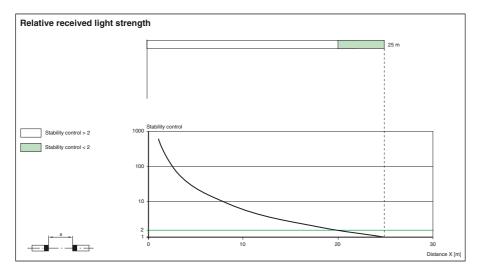

Release date: 2013-01-14 15:23 Date of issue: 2013-02-04 215060\_eng.xml

Subject to modifications without notice

Pepperl+Fuchs Group U www.pepperl-fuchs.com fa-info 3