



108 KEYS

For Bluetooth:

- Blue light blinks during reconnection.
- Solid blue for 2 seconds when connected.
- Press a key for extra 10 seconds to reconnect or it sleeps.
- Keeps the last successful connection data after a failed attempt.

Power-saving:

- Backlight off after 3 minutes idle.
- Deep sleep after 30 minutes total.
- Any key wakes it from power-saving immediately.
- First key press wakes it from deep sleep.


Device's Name

For wired connection: Gaming Keyboard

For 2.4G wireless connection: 2.4G Wireless Device

For Bluetooth 3.0 connection: BT3.0KB

For Bluetooth 5.0 connection: BT5.0KB

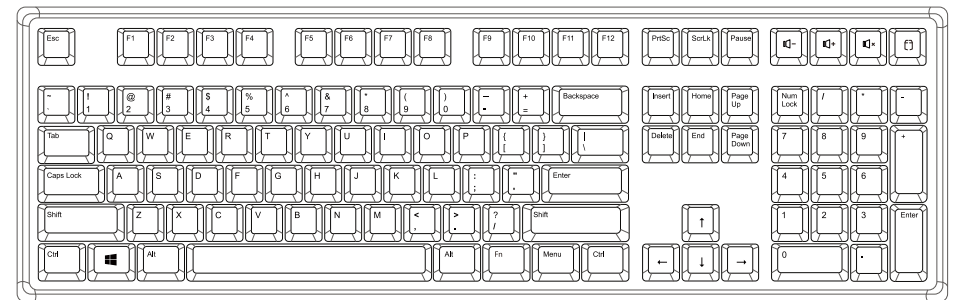

108 Keys Mechanical Keyboard Instruction Manual

The Function of FN Combination Keys

	Combination Keys	Win/Mac Mode
Fn+	shift_R	Reset to Factory Settings
	F1	My Computer/Decrease Screen Brightness
	F2	Home/Increase Screen Brightness
	F3	Mail/Task Control
	F4	Search/Call Siri
	F5	Music/None
	F6	Pause or Play/None
	F7	Previous Track/Previous Track
	F8	Next Track/Pause/Play
	F9	Volume Up
	F10	Volume Down
	F11	Mute
	F12	Calculator
	Prtsc	Turn Off/On Backlight
	Insert	Toggle Backlight Mode
	Delete	Toggle Backlight Color
	Backspace	Check Battery Level
	A	Windows Layout
	S	Mac Layout
	Tab	Wired/Wireless Cycling Switch
	Q	Bluetooth Device 1
	W	Bluetooth Device 2
	E	Bluetooth Device 3
	R	2.4G
WIN	Lock/Unlock Windows	

Indicator Lights

From left to right: A Indicator Light: Number Lock; B Indicator Light: Caps Lock; C Indicator Light: Scroll Lock

Battery Indicator Light

For a 3.7V lithium battery: The FN key's red light warns of low battery below 3.3V. During charging, this red light shows it's charging, and turns green for 3 seconds when full, then returns to normal backlight. To check battery life in wireless mode, press FN+Backspace; keys 1-0 light up to indicate battery level, with each light representing 10%. All lights on mean 100% battery.

2.4G Pairing

To pair the keyboard with a 2.4G receiver:

1. Turn on the keyboard and press FN+R to enable 2.4G mode.
2. Press and hold FN+R for 3 seconds to initiate pairing.
3. Insert the 2.4G receiver; the indicator light will blink quickly.
4. Once paired, the light turns solid for 2 seconds, then the keyboard is ready.
5. If the keyboard doesn't find a device to pair with in 30 seconds, it stops searching, turns off the light, and goes to sleep.
6. To switch from wired to 2.4G, first press FN+TAB for 3 seconds to go wireless, then perform the pairing steps.

Bluetooth Pairing

To pair the keyboard with Bluetooth:

1. Turn on the keyboard.
2. Hold FN+Q/W/E to activate Bluetooth.
3. Continue holding for 3 seconds to pair; a fast flashing light indicates pairing mode.
4. If it connects, the light remains for 2 seconds. If not, it turns off, and the keyboard sleeps.
5. For wired to Bluetooth, hold FN+TAB for 3 seconds, then repeat the pairing steps.

Reconnection Indicator

1. The keyboard tries to reconnect to the last device after turning on or waking up. If it can't reconnect, it sleeps again.
2. Press a key to try reconnecting.

For 2.4G:

- Green light blinks during reconnection.
- Solid green for 2 seconds when connected.
- Press a key to keep trying for 10 more seconds or else it sleeps.
- Stores last successful connection even after a failed try.