




Catalog Number 73522  
UPC Number 60198673522  
Description LED Emergency Light  
High Output LED Lamps  
Self Diagnostic

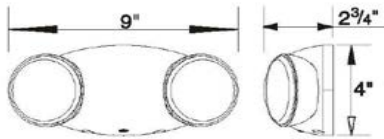

#### Features

- Self Diagnostic Test Feature continually diagnoses units performance and tests system to ensure reliable operation and to meet electrical & Life Safety Codes
- Completely Self-Contained
- Fully Automatic Operation
- Compact, Low Profile Designs in Neutral Finish
- Push to Test Switch
- 3.6 Volt Maintenance Free Ni-Cad Battery
- Environmental Coated, Solid State Charger
- 2 x 12 LED 76 Lumen Fully Adjustable Glare Free Lamps
- Automatic, Low Voltage Disconnect (LVD)
- Universal Transformer for 120 or 277 VAC
- Universal J-Box Mounting Plate
- Injection Molded, V-O Flame Retardant, High Impact, Thermoplastic Housing
- Charge Rate/Power on LED Indicator Light
- 90 Minute Emergency Operation
- Damp Location Rated
- Self Diagnostic Features:
  - On-Line real time monitoring of battery charging, disconnection or failure and local or remote lamp failure
  - Self Testing and 15 Minute discharge every 30 days
  - Self Testing and 90 Minute discharge annually

#### Dimension Information

L Inches (mm) 9  
H Inches (mm) 4.00  
Depth Inches (mm) 2.75

#### Specifications

Input Rating Amps: 1.03  
Input Rating Watts: .85 @ 120V .80 @ 277V  
Lamp Type: LED 76 Lumens Per Head  
Voltage Rating: 120/277  
Flammability Rating: UL94V-0  
Battery Operation: 3.6 Volt Nickel Cadmium - 90 Minutes Min

#### Packaging

Box Qty 1  
Master Carton Qty 12

#### Certifications

UL UL 924  
cUL No  
RoHS Yes

#### Warranty

Five Years