




Catalog Number 73524
UPC Number 60198673524
Description LED Emergency Light
High Output LED Lamps
Self Diagnostic

Features

- Self Diagnostic Test Feature continually diagnoses units performance and tests system to ensure reliable operation and to meet electrical & Life Safety Codes
- Completely Self-Contained
- Fully Automatic Operation
- Compact, Low Profile Designs in Neutral Finish
- Push to Test Switch
- 3.6 Volt Maintenance Free Ni-Cad Battery
- Environmental Coated, Solid State Charger
- 2 x 12 LED 76 Lumen Fully Adjustable Glare Free Lamps
- Automatic, Low Voltage Disconnect (LVD)
- Universal Transformer for 120 or 277 VAC
- Universal J-Box Mounting Plate
- Injection Molded, V-O Flame Retardant, High Impact, Thermoplastic Housing
- Charge Rate/Power on LED Indicator Light
- 90 Minute Emergency Operation
- Damp Location Rated
- Self Diagnostic Features:
 - On-Line real time monitoring of battery charging, disconnection or failure and local or remote lamp failure
 - Self Testing and 15 Minute discharge every 30 days
 - Self Testing and 90 Minute discharge annually
- Remote Capable
 - 4 Lamps 90 Minute Battery Run Time
 - 3 Lamps 120 Minute Battery Run Time
 - 2 Lamps 180 Minute Battery Run Time

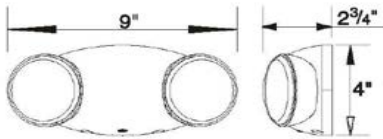

Dimension Information

L Inches (mm)	9
H Inches (mm)	4.00
Depth Inches (mm)	2.75

Specifications

Input Rating Amps:	1.03
Input Rating Watts:	.85 @ 120V .80 @ 277V
Lamp Type:	LED 76 Lumens Per Head
Voltage Rating:	120/277
Flammability Rating:	UL94V-0
Battery Operation:	3.6 Volt Nickel Cadmium - 90 Minutes Min

Packaging

Box Qty	1
Master Carton Qty	12

Certifications

UL	UL 924
cUL	No
RoHS	Yes

Warranty

Five Years