

Type \_\_\_\_\_

Project \_\_\_\_\_

Catalog No. \_\_\_\_\_

Lamp/Wattage \_\_\_\_\_

**NE-831****Remote Emergency Heads**

Lamp: 6W Wedge Base Incandescent

**PRODUCT DESCRIPTION**

Remote head fixtures provide a superior aiming and flexible appearance along with excellent performance. Dual lighting heads provide strong ambient light levels to assist in emergency egress during power failure. Internal solid state switching automatically activates fixture during power loss. Universal single and dual-head DC remote emergency lighting modules. Connects to any 6V or 12V emergency battery available in most exit or emergency fixtures.

**CONSTRUCTION****BODY**

Injection molded, thermoplastic housing.

**LENS**

Acrylic lens Included

**MOUNTING**

5" Canopy matching round mounting plate for 3" or 4" box standard.  
Mounting hardware included.

**ANGLE ADJUSTMENT**

365° horizontal rotation and 160° vertical adjustment.

**ELECTRICAL****VOLTAGE**

6 Volt or 12 Volt Remote (6 Volt lamp(s) included)

**LAMPS**

6 Volt 6 Watt T5 Wedge Base (included)

**REMOTE**

Use with 6 Volt or 12 Volt remote output (lamp(s) must be replaced for 12 volt operation).

**LABELS AND LISTINGS**

UL 924


**ACCESSORIES**

NEXS-M1: Metal Shield: 16" L x 8" W x 8" H

NEXS-P1: Polycarbonate Vandal / Environmental Resistant Shield (Gasket for Wet Location)

**DIMENSIONS**

NE-831

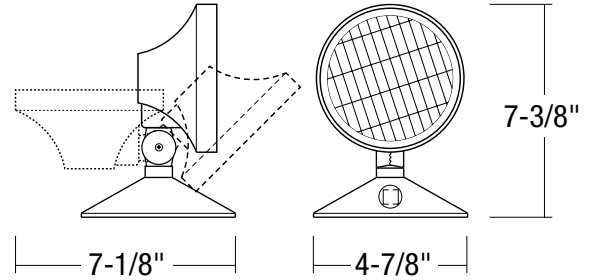

Height : 7-3/8"  
Width : 4-7/8"  
Max. Extension : 7-1/8"

**Remote Emergency Head**

Catalog No. \_\_\_\_\_

**NE-831**

Create a complete track head number: Example: NE - 831