

NE-832**Emergency Dual Remote Head**

Lamp: 6W Wedge Base Incandescent

Type

Project

Catalog No.

Lamp/Wattage

PRODUCT DESCRIPTION

Remote head fixtures provide a superior aiming and flexible appearance along with excellent performance. Dual lighting heads provide strong ambient light levels to assist in emergency egress during power failure. Internal solid state switching automatically activates fixture during power loss. Universal single and dual-head DC remote emergency lighting modules. Connects to any 6V or 12V emergency battery available in most exit or emergency fixtures.

CONSTRUCTION**BODY**

Injection molded, thermoplastic housing.

LENS

Acrylic lens Included

MOUNTING

5" Canopy matching round mounting plate for 3" or 4" box standard.
Mounting hardware included.

ANGLE ADJUSTMENT

365° horizontal rotation and 160° vertical adjustment.

ELECTRICAL**VOLTAGE**

6 Volt or 12 Volt Remote (6 Volt lamp(s) included)

LAMPS

6 Volt 6 Watt T5 Wedge Base (included)

REMOTE

Use with 6 Volt or 12 Volt remote output (lamp(s) must be replaced for 12 volt operation).

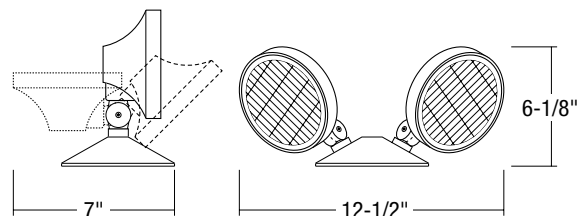
LABELS AND LISTINGS

UL 924

ACCESSORIES

NEXS-M1: Metal Shield: 16" L x 8" W x 8" H

NEXS-P1: Polycarbonate Vandal / Environmental Resistant Shield (Gasket for Wet Location)

DIMENSIONS**NE-832**

Height : 6-1/8"
Width : 13-1/2"
Max. Extension : 7"

**Remote Emergency Head**

Catalog No.

NE-832

Create a complete track head number: Example: NE-832