

## NTH-115 (Line Voltage Track)

### Lamp Holder.

Lamp: 50W R20/PAR20 / 75W BR30/PAR30  
150W BR40/PAR38 (not included)

#### PRODUCT DESCRIPTION

Lamp holder suitable for applications requiring higher wattage lamp sources. Construction is minimal with a short adjustment bracket connecting high heat rated socket with contact head.

#### FEATURES

- White glazed porcelain bare socket.
- Heat resistant teflon coated wire lead.
- Low profile mounting / adjustment arm.
- High strength stainless steel electrical contacts.
- One or two circuit track capable.

#### CONSTRUCTION

##### Adjustment Arm

0.080" Rigid steel "L-bracket" connects fixture housing to electrical contact head. Screw locks angle position to prevent loss of angle from constant heat exposure.

#### ELECTRICAL SYSTEM

##### Socket

Porcelain jacketed aluminum screw thread medium-base socket

##### Lamp

50W R20/PAR20 Maximum (not included)  
75W BR30/PAR30 Maximum (not included)  
150W BR40/PAR38 Maximum (not included)

##### One/Two Circuit Conversion

Positive contact (opposite neutral and ground contacts) is preset to "down" position at factory but may be raised to the higher position to install onto the second circuit of Nora Lighting NT- 2300 series two-circuit track.

#### FINISHES

White heat rated baked enamel paint. Custom painting or anodizing for special applications are also available. Custom finishes will require lead times that vary depending on vendor schedule. Please consult factor for quotation, and provide either a Dunn Edwards number or color chip for exact matching.

#### LABELS AND LISTINGS

UL Listed.

**NORALIGHTING.**

Type


Project

Catalog No.

Lamp/Wattage

#### DIMENSIONS

NTH-115

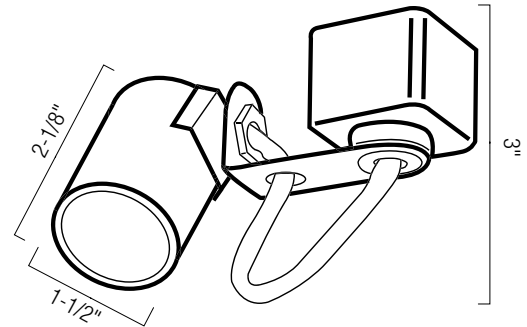

Diameter: 1-1/2"  
Length : 2-1/8"  
Max. Extension: 3"



#### Line Voltage Lamp Holder

Catalog No.	Min. - Max Wattage	Finishes	Style
NTH-115	150W	W = White	Blank = H-Style J = J-Style L = L-Style

Create a complete track head number: Example: NTH-115

**NORALIGHTING.**

6505 Gayhart St., Commerce, CA 90040 • Phone: 800.686.6672 • FAX: 800.500.9955 • www.noralighting.com  
e-mail: nora@noralighting.com • Specifications subject to change without notice. © 2014