

NTH-122 (Line Voltage Track)

Step Cylinder with L-Bracket Mount.

Lamp: 50W R/PAR20

PRODUCT DESCRIPTION

Line voltage stepped "continental" style housing.2 includes a "L" bracket which provides full adjustment of light source for special aiming and has a tightening knob to assure secure lock on angle position.Internal mechanism allows for adjustment and resists angle degradation.

FEATURES

- Die cast aluminum provies superior strength and rigidity.
- Black baffle eliminates glare and adds finished touch.
- One or two circuit track capable.

CONSTRUCTION

Housing

0.030" Deep drawn steel construction with simple, yet decorative design. All edges are softened for aesthetic appearance

L-Bracket

0.085" Rigid steel bracket connects fixture housing to electrical contact head. Plastic angle tightening knob maintains clean, decorative appearance of the fixture and provides secure angle position.

ELECTRICAL SYSTEM

Socket

Porcelain jacketed aluminum screw thread medium-base socket

Lamp

50W R20/PAR20 Maximum (not included)

One/Two Circuit Conversion

Positive contact (opposite neutral and ground contacts) is preset to "down" position at factory but may be raised to the higher position to install onto the second circuit of Nora Lighting NT- 2300 series two-circuit track.

FINISHES

Black, Bronze and White powder coated finishes availabe, contact warehouse for custom finishes.

LABELS AND LISTINGS

UL Listed.

NORALIGHTING.


Type

Project

Catalog No.

Lamp/Wattage

DIMENSIONS

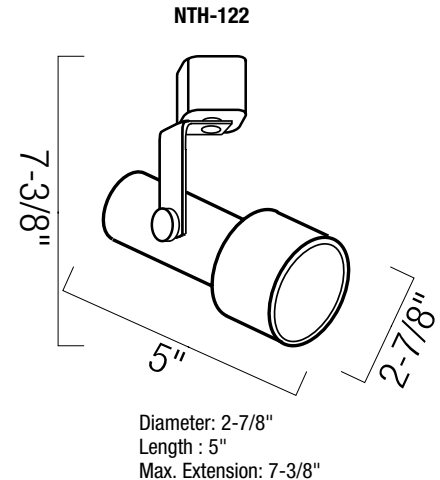

Step Cylinder with L-Bracket.

Catalog No.	Min. - Max Wattage	Finishes	Style
NTH-122	50W	B = Black	Blank = H-Style
		W = White	J = J-Style
		BZ = Bronze	L = L-Style

Create a complete track head number: Example: NTH-122B

NORALIGHTING.

6505 Gayhart St., Commerce, CA 90040 • Phone: 800.686.6672 • FAX: 800.500.9955 • www.noralighting.com
e-mail: nora@noralighting.com • Specifications subject to change without notice. © 2014