

NX-503-LED

LED Exit Sign

Lamp: (12) LED Modules 2VA (total)

PRODUCT DESCRIPTION

Nora Lighting's compact, low profile LED exit signs are as brilliant and visible as standard incandescent signs, yet use a fraction of the power. LED light sources require no maintenance for 25 years—saving greatly on maintenance and upkeep costs. Nora Lighting's LED exits are ideal for commercial and industrial standard non-emergency applications where low maintenance and operating costs are a must.

Universal 120V/277V exit sign utilizing Light Emitting Diode (LED) modules as the primary light source for economy operation.

BODY

- 12-1/8" Width X 8-3/4" Height X 1-3/4" Depth
- Injection-molded thermoplastic housing

FACE

- 6" high text with color diffusion
- Replaceable knockout directional chevrons
- Alternate "SALIDA" lettering available

MOUNTING

- Wall, side, or ceiling
- Mounting hardware and canopy included

ELECTRICAL

- 120V/277V Input
- Total power usage: 2 Watts
- 12 X LED units
- Short Circuit/ Surge protection

LIFE EXPECTANCY

- LED sources and PC circuitry are rated for a minimum of 25 years with no change in illumination level

APPROVALS

- UL 924
- NFPA
- NEC
- State & Municipal

LIFE EXPECTANCY

Spare Lens, RedNEXL-R
Spare Lens, Green . . .NEXL-G
Plastic ShieldNEXS-P1
Metal ShieldNEXS-M1



LED Exit Sign

Catalog No.	Housing	Lens Color
NX-503	(Blank) = White	R = Red
	B = Black	G = Green
	S = Salida	

NORALIGHTING.

Type


Project

Catalog No.

Lamp/Wattage

DIMENSIONS

NX-503-LED

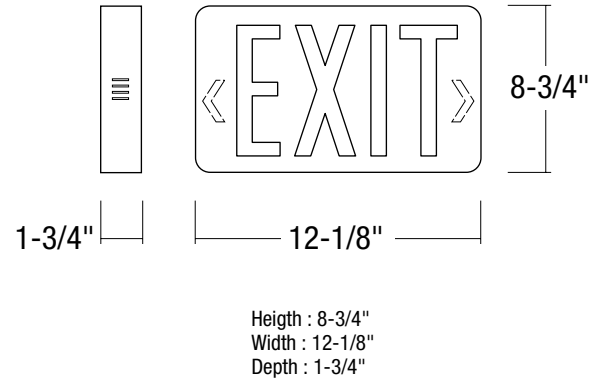

Create a complete track head number: Example: NX-503BR

NORALIGHTING.

6505 Gayhart St., Commerce, CA 90040 • Phone: 800.686.6672 • FAX: 800.500.9955 • www.noralighting.com
e-mail: nora@noralighting.com • Specifications subject to change without notice. © 2014