

AC 1200

Wireless Dual Band Gigabit Router

Archer C5



Highlights


- **Fast Wi-Fi** – 300Mbps on 2.4GHz + 867Mbps on 5GHz totals 1.2Gbps Wi-Fi speeds
- **Maximum Range** – 2 dual band external antennas provide maximum Omni-directional wireless coverage and reliability
- **USB Ports** – Easily share a printer locally and files & media with networked devices or remotely via FTP server
- **Tether App** – TP-LINK Tether provides the easiest way to access and manage the router on your iOS and Android devices



300Mbps+
867Mbps




Dual Band
2.4 & 5 GHz



Gigabit
LAN Port



Guest
Network



Parental
Control



Tether
APP



Features



Speed

- **Fast Wireless Speed** – Combined wireless speeds up to 1.2Gbps at 2.4GHz & 5GHz band concurrently
- **Support 802.11 ac** – Offering 3 times faster data rate than 802.11n in a single stream



Wi-Fi Range

- **2 Dual Band Antennas** – 2 dual band external antennas provide maximum Omni-directional wireless coverage



Reliability

- **Simultaneous Dual Band** – Reduces interference for more stable connections
- **IP QoS** – Advanced QoS automatically recognizes & prioritizes streaming & gaming applications

Features



Easy Sharing

- **Dual USB Ports** – With two USB 2.0 ports, you can access and share a printer as well as your files and media locally. Via the router's FTP server, you can also have access to your files & media with networked devices remotely
- **Built-in Print Server** – Supports wireless printing from multiple computers (works in conjunction with a USB Printer)
- **Built-in Media Server** – Allows users to play music, video and view photos



Ease of Use

- **3-Step Quick Installation** – Easy Setup Assistant supporting multiple languages provides a quick & hassle free installation
- **Fast Encryption** – Easy one-touch WPA wireless security encryption with the WPS button
- **Easy On/Off** – Wi-Fi On/Off Button allows users to turn wireless radio on or off
- **Power On/Off** – Convenient power saving
- **Hassle-free Management with Tether App** – Tether App allows easy network management at your fingertips




Security

- **Access Control** – Guest Network Access provides secure Wi-Fi access for guests
- **Parental Control** – Establish restricted access policies for all connected devices
- **Easy Bandwidth Management** – IP-based Bandwidth Control makes it easier for you to manage the bandwidth of connected devices
- **Encryptions for Secure Network** – WPA-PSK/WPA2- PSK encryptions provide active defense against security threats for user networks

Specifications

Hardware

- **Ethernet Ports:** 4 10/100/1000Mbps LAN Ports & 1 10/100/1000Mbps WAN Port
- **USB Ports:** 2 USB 2.0 Ports
- **Button:** WPS/Reset Button, Wireless On/Off Button, Power On/Off Button
- **External Power Supply:** 12V/2.5A
- **Dimensions (W x D x H):** 9.6 x 6.4 x 1.3 in. (243 x 160.6 x 32.5mm)
- **Antenna:** 2 Dual Band External Antennas

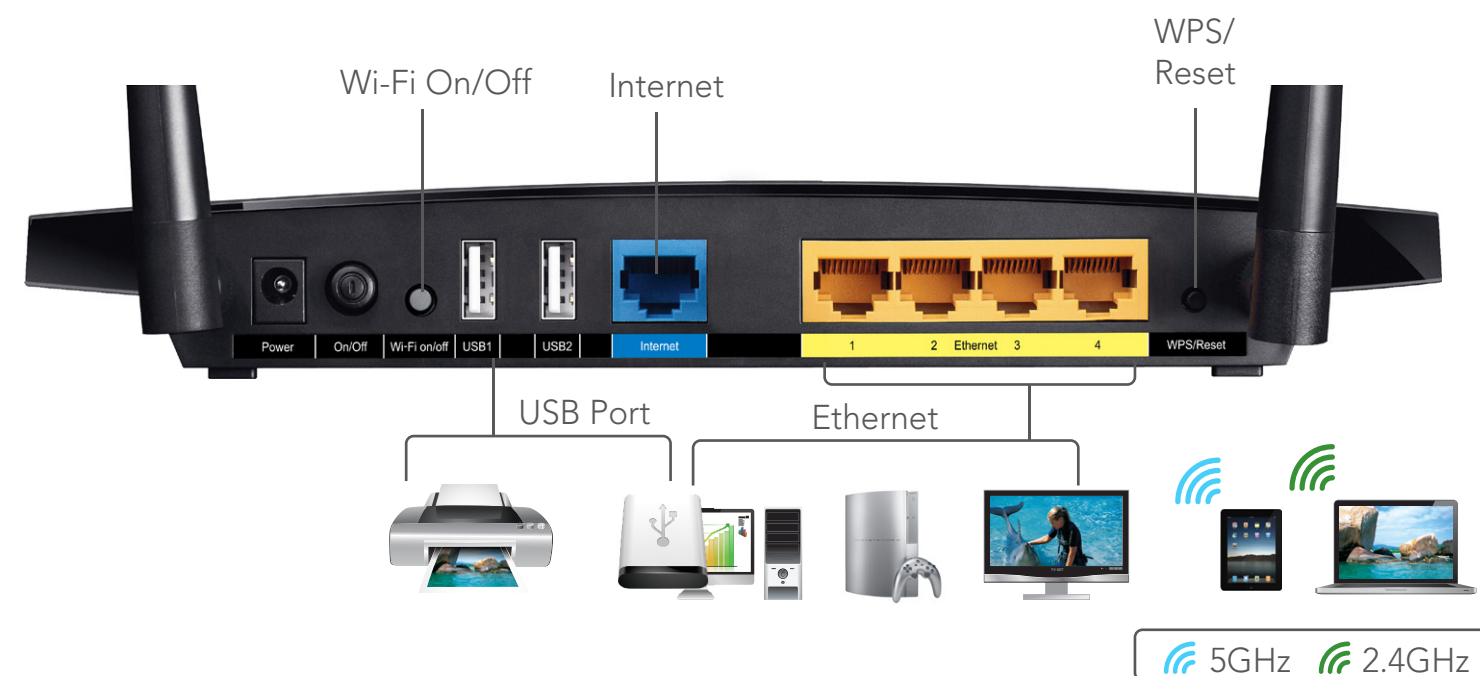

Wireless

- **Wireless Standards:** IEEE 802.11ac/n/a 5GHz, IEEE 802.11b/g/n 2.4GHz
- **Frequency:** 2.4GHz and 5GHz
- **Signal Rate:** 300Mbps at 2.4GHz, 867Mbps at 5GHz
- **Transmit Power:** CE: <20dBm(2.4GHz), <23dBm(5GHz)
FCC: <30dBm
- **Reception Sensitivity:**
 - 5GHz: 11a 54M: -74dBm
 - 11ac HT20: -67dBm
 - 11ac HT40: -63dBm
 - 11ac HT80: -59dBm
 - 11n HT20: -71dBm
 - 11n HT40: -69dBm
 - 2.4G: 11g 54M: -76dBm
 - 11n HT20: -73dBm
 - 11n HT40: -71dBm
- **Wireless Function:** Enable/Disable Wireless Radio, WDS Bridge, WMM, Wireless Statistics
- **Wireless Security:** 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK

Specifications

Software

- **WAN Type:** Dynamic IP/Static IP/PPPoE/PPTP(Dual Access)/L2TP(Dual Access)
- **DHCP:** Server, Client, DHCP Client List, Address Reservation
- **Quality of Service:** WMM, Bandwidth Control
- **Port Forwarding:** Virtual Server, Port Triggering, UPnP, DMZ
- **Dynamic DNS:** DynDns, Comexe, NO-IP
- **VPN Passthrough:** PPTP, L2TP, IPSec
- **Access Control:** Parental Control, Local Management Control, Host List, Access Schedule, Rule Management
- **Firewall Security:** DoS, SPI Firewall, IP Address Filter/Domain Filter, IP and MAC Address Binding
- **Protocols:** Supports IPv4 and IPv6
- **USB Sharing:** Supports Samba(Storage)/FTP Server/Media Server/Printer Server
- **Management:** Access Control, Local Management, Remote Management
- **Guest Network:** 2.4GHz guest network x 1, 5GHz guest network x 1

Others

Package Contents

- AC 1200 Wireless Dual Band Gigabit Router Archer C5
- Power Supply Unit
- Resource CD
- RJ45 Ethernet Cable
- Quick Installation Guide

Certification

- CE, FCC, RoHS

System Requirements

- Microsoft Windows 98SE, NT, 2000, XP, Vista™ or Windows 7, 8, 8.1, MAC OS, NetWare, UNIX or Linux
- Internet Explorer 11, Firefox 12.0, Chrome 20.0, Safari 4.0 browsers or higher, or other Java-enabled browsers
- Cable or DSL Modem
- Subscription with an Internet Service Provider (for Internet access)

Environment

- Operating Temperature: 0°C~40°C (32°F ~104°F)
- Storage Temperature: -40°C~70°C (-40°F ~158°F)
- Operating Humidity: 10%~90% non-condensing
- Storage Humidity: 5%~90% non-condensing

Others

Ideal to use with



- AC1200 Wireless Dual Band USB Adapter Archer T4U



- AC1200 High Gain Wireless Dual Band USB Adapter Archer T4UH

Similar Products



- AC1750 Wireless Dual Band Gigabit Router Archer C7



- AC1200 Wireless Dual Band Router Archer C50



For more information, please visit

<http://www.tp-link.com/en/products/details/?categoryid=&model=Archer+C5>

or scan the QR code left

Specifications are subject to change without notice. TP-LINK is a registered trademark of TP-LINK Technologies CO., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from TP-LINK Technologies CO., Ltd.

Maximum wireless speed of up to 1200Mbps is the theoretical data rate derived from IEEE standard 802.11 specifications. Actual data throughput and wireless coverage will vary due to network conditions and environmental factors including volume of network traffic, building materials and construction, network overhead, actual data throughput rate, and wireless coverage. TP-LINK makes no express or implied representations or warranties about this product's compatibility with any future standards.

www.tp-link.com