Specification of Wall Pack with glass cover



Energy Saving 70% | **5 Years warranty** | Ra>80 PF>0.9 | AC 120-347v

ETL Intertek 5000444 | c UL us LISTED E468007 | FC | DLC
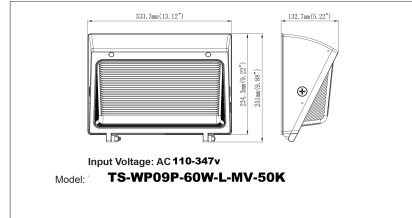
Product Features

● *A variety of drivers are available*
Using an isolated, 1-10V dimmable.

● *Protection level: Wet Location*
The wall pack is sealed by silicone ring that can avoid dust completely and be waterproof, also the internal level ensures that the installation is horizontal.

Level   silicone ring

Product Dimension

333.7mm(13.12") · 132.7mm(5.22") · 255.7mm(9.68") · 233mm(9.22")

Input Voltage: AC 110-347v

Model: **TS-WP09P-60W-L-MV-50K**

Lighting Parameters

Power	28W	40W	60W	80W	100W	120W
Rate Current	0.257A	0.367A	0.55A	0.734A	0.917A	1.1A
Working Voltage	AC120-347 V					
Beam Angle	90°x100°					
Color Temperature	4000K,5000K,5700K					
lamp's Luminous Efficiency	100lm/W &120lm/W					
Color Rendering Index	Ra＞80					
Operating Temperature	-40°F～+113°F (-40°C～+45°C)					
Storage Temperature	-40°F～+158°F (-40°C～+70°C)					
Environment Location	Wet Location					
Life-span	≥50000H					
Materials	ADC12					
The color of the lamp shell	Brown					
Mounting	Mounting plate fixde					

Optical Properties

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

UNIT:cd
C0/180,101.6 Ic:29;
C90/270,94.7 Ic:42;

AVERAGE BEAM ANGLE(50%):98.2 DEG

Applications

Packing/Weight

Power	Outer Carton Size (L*W*H)	Qty/Carton (pcs)	Net weight (lbs)	Gross weight (lbs)
28W			5.62	7.82
40W			5.70	7.90
60W	15.7"*12.6"*8.2"	1	5.73	7.93
80W	398*320*208mm		5.77	7.97
100W			5.95	8.15
120W			6.06	8.26

Safety Information

1、Using the standard working voltage: AC120~347v , 50/60Hz.
2、Be sure the power supply is turned off before installation.
3、Switch off power of the mains supply or the connection lead respectively before doing any works.
4、Please note waterproof, dustproof, electricity prevention and shockproof for the external power wires.
5、Be sure the connection between the wires is in good condition when install the lamps, beware of leakage.
6、Please read the specification carefully before installation.
7、The complete installation must be handled by an electrical expert