

# Norman I Light Mini-Pendant

6151701, 6151801 | 1.0

VISUAL COMFORT &amp; Co.

STUDIO COLLECTION

## SAVE THESE INSTRUCTIONS!

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.


Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

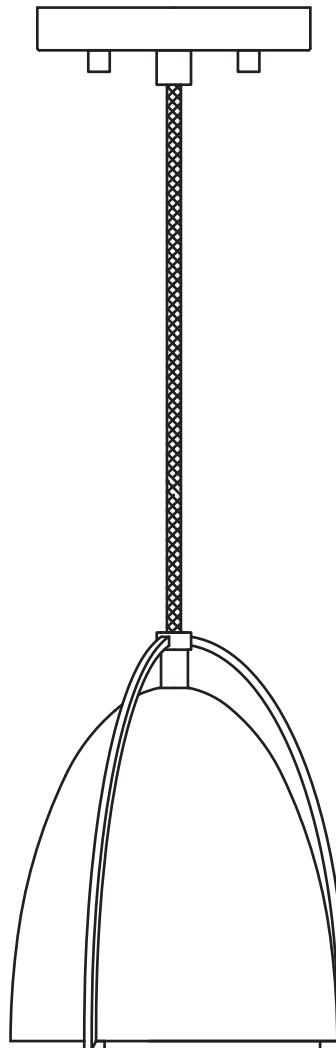

VISUAL COMFORT &amp; Co.


7400 Linder Ave., Skokie, IL 60077

T 847.410.4400 | F

847.410.4500

[www.visualcomfort.com](http://www.visualcomfort.com)

# Install the Fixture

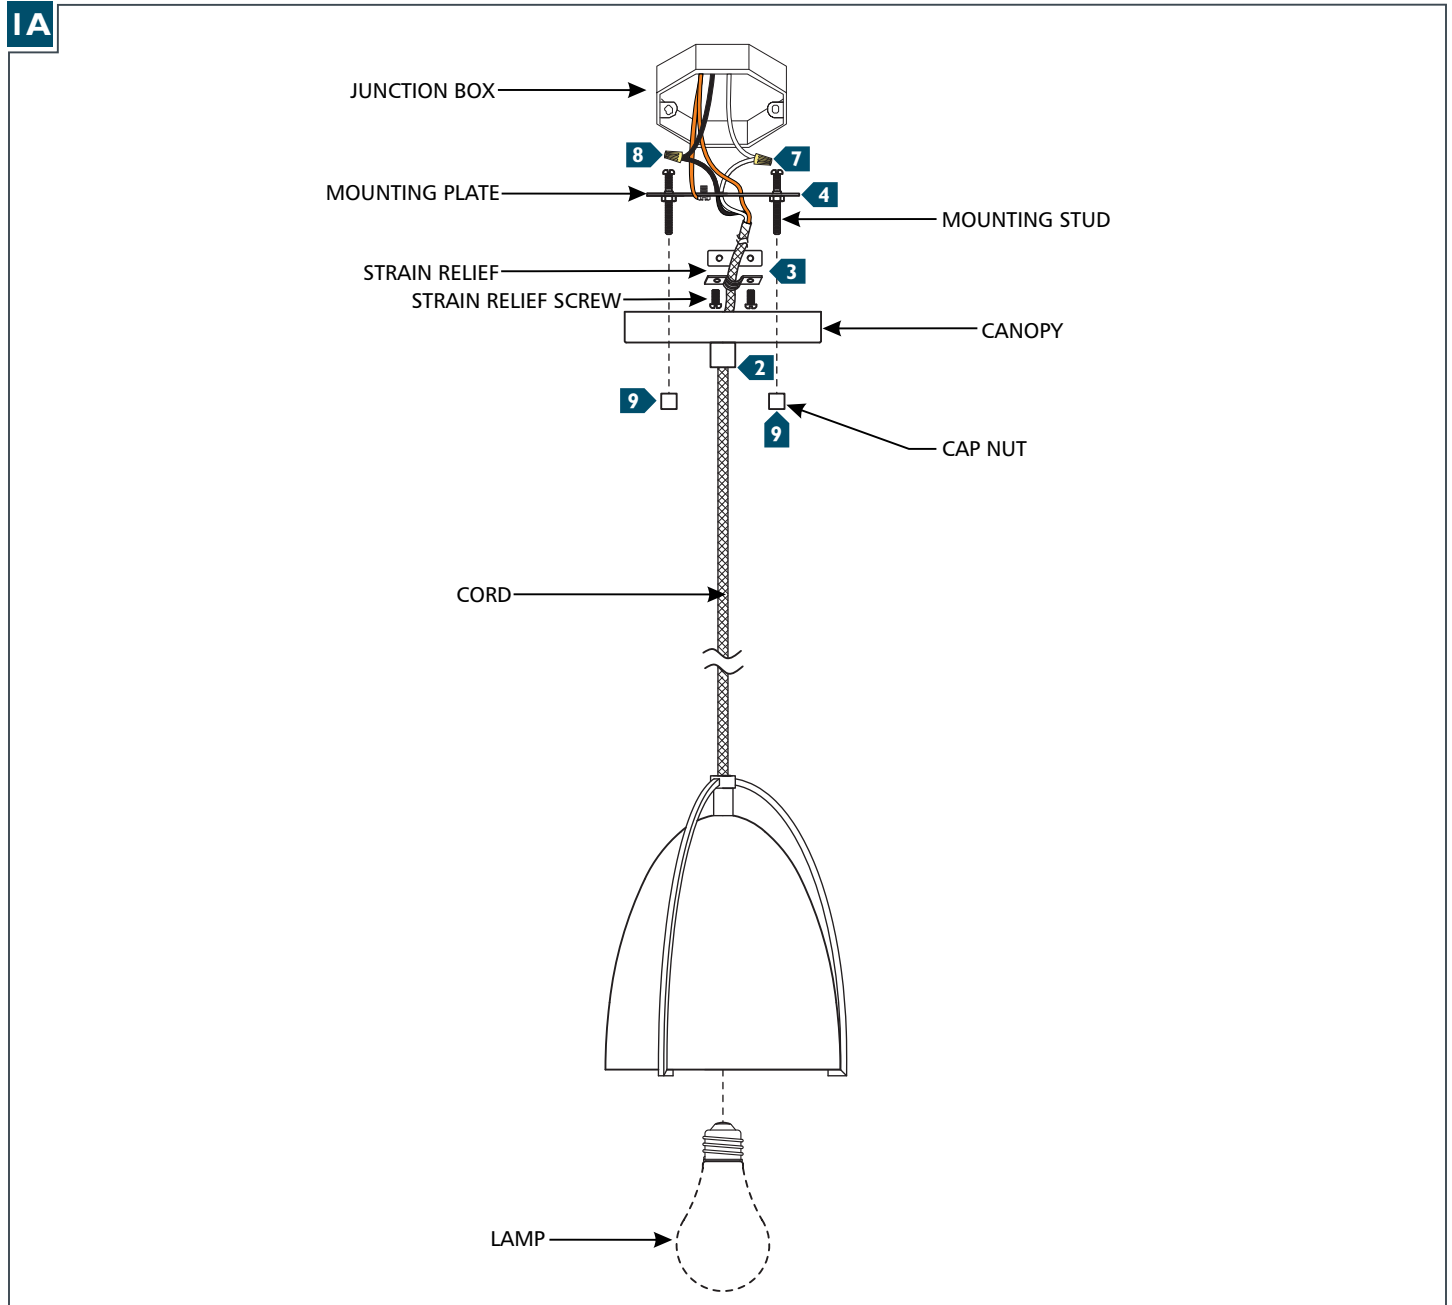

- 1 If necessary, separate the mounting plate from the canopy by unscrewing and removing the cap nuts.
- 2 Feed the fixture cord through the canopy and determine the desired height.
- 3 Install the strain relief on the cord, inside the canopy, by tightly screwing both pieces together.
- 4 Secure the mounting plate to the junction box.
- 5 Trim the cord leaving enough for electrical connections. From the end of the cord, strip the insulation 4" and then strip the end of the wires. **NOTE: Make sure not to nick the inner wires.**
- 6 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 7 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 8 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 9 Properly place all wires and wire nut connections into the junction box/canopy, place the canopy onto the mounting studs, and secure in place by screwing the cap nuts onto the studs.
- 10 Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.