
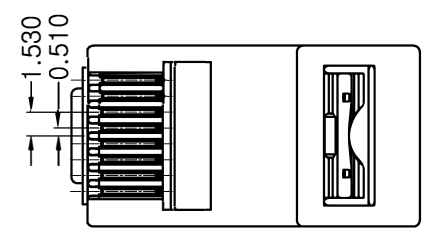
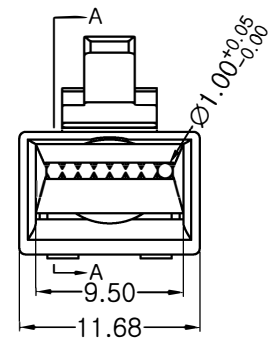
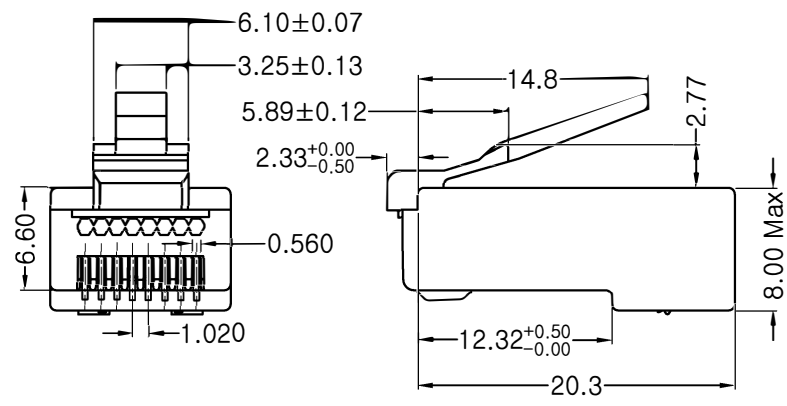
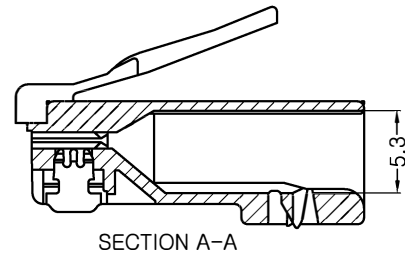


CHANGE			
EDITI	MODIFICATION	UPDATE DATE	SIGNATURE

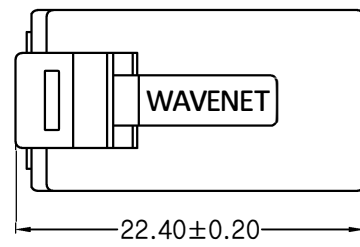

NOTES:

1. Operation Temperature: -40°C ~ +85°C.
2. Electrical Characteristics:
 - 2.1 > Rated Current: 125V AC, 1.5A@25°C.
 - 2.2 > Contact Resistance: 20mΩ Max.
 - 2.3 > Insulation Resistance: 500MΩ Min, 100V DC/min.
 - 2.4 > Voltage Proof: 1000V AC/1 minute no breakdown.
3. Mechanical Characteristics:
 - 3.1 > Insertion Force & Withdrawal Force: 30N Max.
 - 3.2 > Durability: 750 cycles Min.
4. Environmental compliance:
 - 4.1 > the products are compliant with the RoHS, and REACH etc.

PRODUCT NO	CAT6RJ45-EZPASS	DESCRIPTION	CAT6, RJ45-EZPASS, UTP MODULAR PLUG, PASS-THROUGH STYLE, 100PCS/JAR, BLUE COLOR CAP				SHEET.	1/1			
MATERIAL	UNIT	mm	SCALE	1:1	DWG NO	MP23021	EDITI	A/0			
DIMENSIONAL TOLERANCE			THIRD ANGLE PROJECTION			DRAWN	LIJING	DATE	2019.01.16		
X.X ±0.2 X.XX ±0.10 X.XXX ±0.05 ANGLE ±2°						CHECK		DATE			
						APPRO.		DATE			

1	Modular Plug	Contacts	8PCS	/	<input type="checkbox"/> 2Prongs <input checked="" type="checkbox"/> 3Prongs	<input type="checkbox"/> G/F" <input type="checkbox"/> 1u" <input type="checkbox"/> 3u" <input type="checkbox"/> 6u" <input type="checkbox"/> 15u" <input type="checkbox"/> 30u" <input type="checkbox"/> 50u" <input checked="" type="checkbox"/> OTHER	<input checked="" type="checkbox"/> Brass <input type="checkbox"/> Phosphor copper <input checked="" type="checkbox"/> 94V-2 <input type="checkbox"/> 94V-0
NO.	NAME	QTY	PART NO.	DESCRIPTION	MATERIAL		
1							