


# Control Cable 18AWG 2C Riser (CMR) Shielded Stranded

## Cable Detail

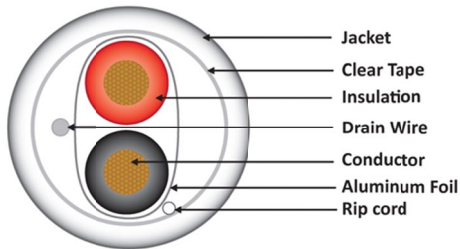

## Cable Marking

18AWG 2C SHIELDED CMR FT4 TYPE XXXXXXXX C(ETL)US  
\*\*\*\*FT

Part Numbers	Jacket Color	Package
CC1802SRXX4	White, Grey	1000ft / Reelex II

## Approval



## Applicable Standards

- 18/2 Shielded Solid Bare Copper CMR Control Cable

## Physical Characteristics

Conductor Material		Stranded Bare Copper
AWG		18
Conductor	(mm)	7 / 0.4
Insulation Material		PVC
Average Thickness	(mm)	0.200
Min. Point Thickness	(mm)	0.170
Insulation Diameter	(±0.03mm)	1.6
Drain Wire		7 / 0.20TC
AL-foil Shielded		Yes
Assembly Dia.	(±0.2mm)	3.3
Jacket Material		FR-PVC
Average Thickness	(mm)	0.38
Min. Point Thickness	(mm)	0.34
Outer Dia.	(±0.2mm)	3.96
Rip Cord		Yes
Insulation colors		Black / Red
Nominal Weight	1000 ft.	28 lbs.