

SCP PART#: CTRL-2-D

Description:

UNIVERSAL CONTROL CABLE- 2C/16 AWG STRANDED BC + 2C/22 AWG STRANDED BC w/AL FOIL SHIELD + DRAIN, UL CM, EN50575:2014 Dca-s3,d2,a3, PVC JKT- YELLOW- 500FT/152M SPOOL

Standard:


UL 444 & UL 13, Type (UL) CM, CMG/CL c(UL) EU RoHS 2011/65 EU Compliant EN50575:2014 REACTION TO FIRE CLASS Dca-s3,d2,a3

Application:

Universal Control Cable

Construction Characteristics:

Conductor A	Material	Stranded Bare Copper
	Size	16AWG X 2C
	Construction	26/0.254+/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.24mm
	AVG.Thickness	0.26mm
	Diameter	2.10+/-0.05mm
	Colors	Black & Red
Conductor 1P	Material	Stranded Bare Copper
	Size	22AWG X 2C
	Construction	7/0.254+/-0.004mm
Insulation	Material	FPE
	Min.Thickness	0.56mm
	AVG.Thickness	0.60mm
	Diameter	2.00+/-0.05mm
	Colors	Purple & White
Shield	Drain wire(TC)	7/0.20+/-0.004mm
	Shield	AL Foil
Assembly(2C+1P)	Core wrap	PE Tape
Jacket	Material	PVC
	AVG.Thickness	0.85mm
	Min.Thickness	0.70mm
	Diameter	70+/-0.20mm
	Rip Cord	Nylon
	Color	Yellow
Bend Radius		Min 20D/140mm

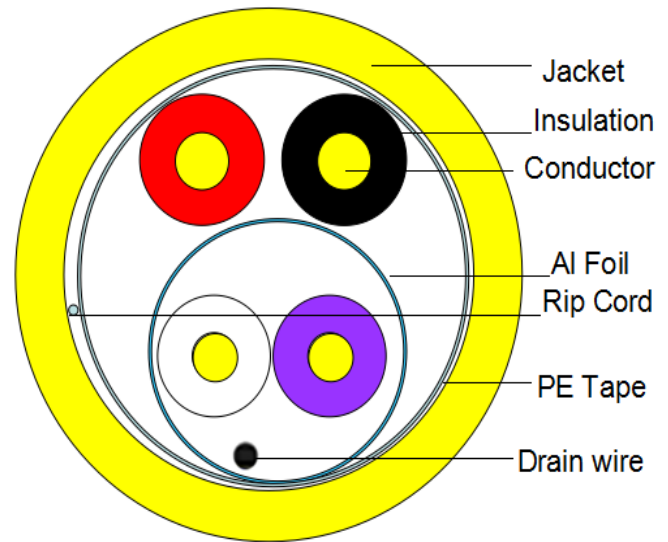

Electrical & Physical Characteristics:

Operating Temperature Range		- 20°C + 70°C	
Conductor Resistance(16AWG)		Max 15.5ohm/km at 20°C	
Conductor Resistance(22AWG)		Max 53.5ohm/km at 20°C	
Rated Voltage		Max 300Volts	
16AWG Core/Core Capacitance		145 ± 30 pf/m	
22AWG Core/Core Capacitance		40 ± 15 pf/m	
22AWG Core/Screen Capacitance		90 ± 30 pf/m	
Dielectric Strength		Min AC1.5KV	
Insulation PVC	Unaged	Tensile Strenght	13.8Mpa
		Elongation	100%
	Aged	Tensile Strenght	11.7Mpa(100°C 168h)
		Elongation	50%(100°C 168h)
Jacket	Unaged	Tensile Strenght	13.8Mpa
		Elongation	100%
	Aged	Tensile Strenght	11.7Mpa(100°C 168h)
		Elongation	50%(100°C 168h)

Marking:

STRUCTURED CABLE PRODUCTS --- CTRL-2 --- E198137 SCP3 (UL) CL2 C(UL) CM 2C/22AWG STR SHIELDED W/DRAIN + 2C/16AWG STR EN50575:2014 CE Dca PVC JKT RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M

Packaging:

Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
10.1kgs/22.27lbs	270X240X160	500ft/152m Spool	64