


Socket Outlets

16 AMP
2P + E
FLUSH
(NON UK)

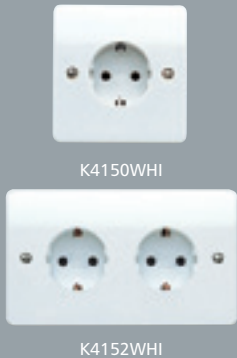

Three Pole Fan Isolator

10 AMP
FLUSH




Shaver Socket Outlet

FLUSH



Shaver/Toothbrush Supply Units

FLUSH

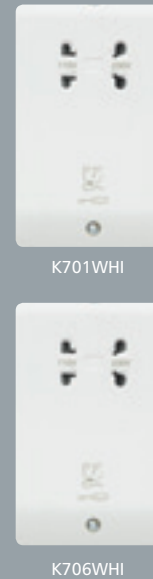

K4150WHI

1 GANG
16A 250V
SHUTTERED
(NON UK)

K4152WHI

2 GANG
16A 250V
SHUTTERED
(NON UK)

10

K4857WHI

WITH SWITCHLOCK
AND PADLOCK

K4859WHI

WITHOUT SWITCHLOCK

K4858
SWITCHLOCK
FOR FAN ISOLATOR

K2000
PADLOCK

5

10

K700WHI

SHAVER SOCKET OUTLET
200-250 VOLTS 50/60Hz
FUSED
Incorporates a self-resetting
overload device, limiting
current to 20VA.

10

10

1

10

K701WHI

SHAVER/TOOTHBRUSH
SUPPLY UNIT
DUAL VOLTAGE
115/230V OUTPUT
(220/240V 50/60Hz INPUT)

K706WHI

SHAVER/TOOTHBRUSH
SUPPLY UNIT
DUAL VOLTAGE
115/230V OUTPUT
(120/130V 50/60Hz INPUT)
(NON UK)

1

1

MOUNTING BOXES:

FLUSH: (35mm)
1 GANG: 866ZIC
2 GANG: 886ZIC

SURFACE:
1 GANG: K2031WHI
2 GANG: K2172WHI

These products are not suitable for
installation in 25mm boxes

DIMENSIONS:
1 gang: 86 x 86mm
2 gang: 86 x 146mm

FIXING CENTRES:
1 gang: 60.3mm
2 gang: 120.6mm

IEC 60884-1: 2006

MOUNTING BOXES:

FLUSH:
3995ZIC

SURFACE:
K2160WHI

For local isolation of fans with or
without timers for repair or routine
maintenance.

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS EN 60947-3: 1992

MOUNTING BOXES:

FLUSH:
861ZIC

SURFACE:
K2140WHI

**Must not be installed in a
bathroom or shower room.**

Designed for wiring onto
lighting circuits

DIMENSIONS:
86 x 86mm

FIXING CENTRES:
60.3mm

BS 4573: 1970

MOUNTING BOXES:

FLUSH: 878ZIC
SURFACE: K2172WHI

This design incorporates a double
wound isolating transformer rated
20VA at 230 or 115 volts it meets
BS EN 61558 making it safe for use
in bathrooms. Insertion of a shaver/
toothbrush plug automatically
switches on by energising the
primary side of the isolating
transformer – removal automatically
switches off. The transformer is
protected against overload by an
automatic solid
state overload device with
automatic resetting.

DIMENSIONS: 146 x 86mm
FIXING CENTRES: 120.6mm

BS EN 61558-2-5: 1998