


Fire Alarm FPLR Cable

16AWG/4C Red Solid Unshielded

Cable Detail

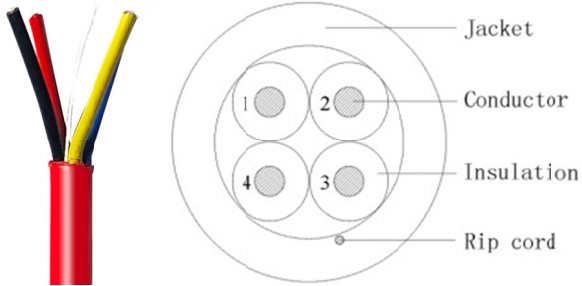

Approval



Physical Characteristics

Conductor	Solid B.C.
AWG	16
Conductor Diameter	1.28 (mm)
Insulation Material	PVC
Average Thickness	0.260 (mm)
Min. Point Thickness	0.240 (mm)
Diameter	1.80 (±0.05mm)
Assembly Diameter	4.40 (±0.1mm)
Jacket Material	PVC
Average Thickness	0.45 (mm)
Min. Point Thickness	0.40 (mm)
Diameter	5.40 (±0.1mm)
Rip Cord	Per request
Nominal Weight	54 (pounds)
Rated Temperature	75 (°C)

Mechanical Characteristics

Test Object	Jacket
Test Material	PVC
Before Tensile Strength	≥13.8 (Mpa)
Aging Elongation	≥100 (%)
Aging Condition	100x168 (°Cxhrs)
Before Tensile Strength	≥85% of unaged (Mpa)
Aging Elongation	≥50% of unaged (%)
Cold Bend (-20±2°Cx4hrs)	No Crack

Colors

- Insulation Color
1.Black / 2.Red / 3.Yellow / 4.Blue
- Jacket Color
Red

Part Number

FC1604URD2

Package

1000FT / REEL

Cable Marking

EXXXXX 16AWG 4/C UNSHIELDED (UL) FPLR
DEVICE/ZONE A B C D E F 1 2 3 4 5 6 7 8 RoHS ****FT