



**Vericom® Fixed Wall Mount Cabinets** are a perfect solution for a variety of networking, AV, and security installations. Compatible with all standard 19-inch EIA equipment, these cabinets are packed with features that make setting up and maintaining equipment a breeze, including a lockable, removable, and reversible front door, removable side panels, and a removable 12" x 12" rear panel for in-wall cable entry.

Constructed of cold rolled and powder-coated 19-gauge steel, these fixed wall mount cabinets have a maximum load capacity of 132 lbs and are available in 9U, 12U, and 15U configurations. Ships unassembled and flat packed for easy on-site handling.

## Benefits

### Security & Protection

- Locking door and side panels prevent unauthorized access to equipment
- Door and side panels are grounded to the cabinet frame

### Flexibility

- Multiple cable entry options provide greater flexibility during installation
- Mounting rails are adjustable to match a variety of equipment sizes
- Front door and side panels are all removable for convenient access to equipment

### Multi-Use

- Available in three sizes to fit in a variety of environments where space is limited
- Top and bottom panel vents to optimize cooling of equipment
- Adaptable for use in network, security and audio/visual installations



### Key Features

- Cable entry on top, bottom and back
- Lace points to reduce cable clutter
- Lockable acrylic front door is removable and reversible
- Removable back panel and side panels



Vents in top panel for mounting optional fans

Removable 12" x 12" rear panel for in-wall cable entry

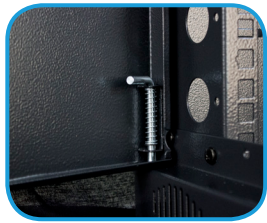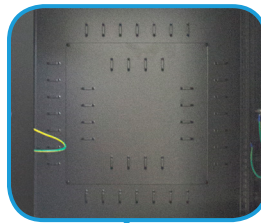


Side panels equipped with quick release hinge pins for easy removal



Removable doors and side panels for easy access



Mounting rails, complete with 10-32 tapped holes and easy to read RU markings

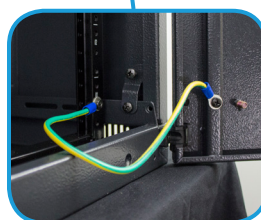

Front door and side panels equipped with ground wire

### Product Dimensions


Item Number	Product Dimensions (H x W x D)	Rack Unit Quantity	Maximum Usable Depth	Static Load Capacity
RWCSF09	18.11" x 21.25" x 23.62"	9U	22.25"	132 lbs.
RWCSF12	23.43" x 21.25" x 23.62"	12U	22.25"	132 lbs.
RWCSF15	28.54" x 21.25" x 23.62"	15U	22.25"	132 lbs.

### Optional Accessories


Item Number	Product Description	Item Compatibility
RAMS4D1	Horizontal D-Ring Cable Manager (4 rings, steel), 1U	RWCSF09, RWCSF12, RWCSF15
RAFND02	Double Fan, 150 CFM	RWCSF09, RWCSF12, RWCSF15
RASC122	12" Cantilever Shelf, 2U	RWCSF09, RWCSF12, RWCSF15
RASA231	Adjustable Depth Wall Cabinet Shelf, 1U	RWCSF09, RWCSF12, RWCSF15
RAMSFD1	Horizontal Finger Duct Cable Manager (Steel), 1U	RWCSF09, RWCSF12, RWCSF15

Additional accessories available. For a complete list visit [vericomsolutions.com](http://vericomsolutions.com)


### Technical Illustration

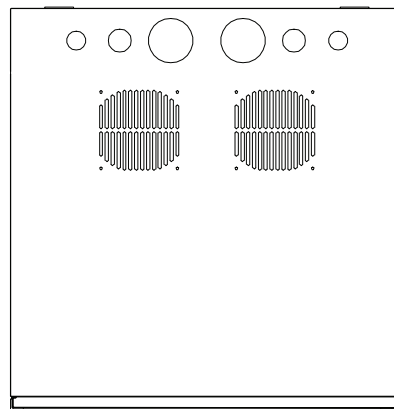

TOP



SIDE

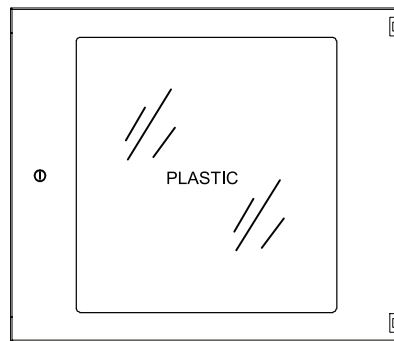

FRONT

### Specifications

Front Door	Removable, Reversible & Lockable Steel Frame with Full Panel Acrylic Window, Opens Full 180°
Back Panel	12" x 12" Removable Panel Wall Mounting Keyholes Spaced 16" Apart Multiple Lace Points
Side Panels	Solid, Full Height & Removable
Top Panel	Ventilation Holes for Optional Fan (6) Knock-Out Cable Entry Holes Located at Back: (2) 3/4", (2) 1" and (2) 2" Knockouts
Bottom Panel	Ventilation Holes for Optional Fan (6) Knock-Out Cable Entry Holes Located at Back: (2) 3/4", (2) 1" and (2) 2" Knockouts
Equipment Support	Adjustable Rail Depth (3.25") 1.75" RU Spacing, Marked and Numbered on Rails 19" W, EIA-310-D Universal Hole Spacing 10-32 Threaded Holes
Grounding	14 AWG Ground Wire Connects Door and Side Panels to Cabinet Frame
Finish	Black Powder Coat
Static Loading Capacity	132 lbs.
Included Accessories	(48) 10-32 Mounting Screws & Washers (1) Grounding Kit (1) Paper Mounting Template (2) Keys
Compliance	ANSI/EIA RS-310D IEC60297-2 DIN41494; Part 1 DIN41494; Part 7

