


Casambi lighting control for up to 4 color channels



CASAMBI
READY

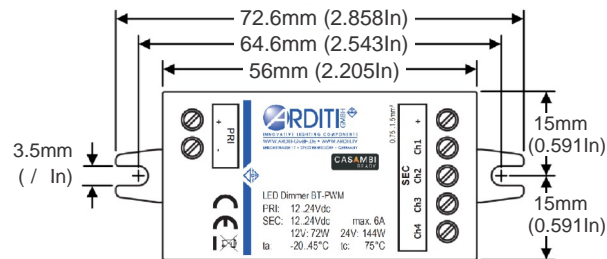

Technical data	TW, RGB, RGB+W, 1..4 CH	CCT/TW	RGB	RGB+W
Part no.	800385	800388	800389	800386
Type	DEBTPRO14 -144	DE2BT14-144	DE3BT14-144	DE4BT14-144
Power supply input	12..24 Vdc			
Radio signal	2,4..2,483 GHz; 4 dBm			
Max. output power 12Vdc	72 W			
Max. output power 24Vdc	144 W			
PWM frequency	~ 400 Hz			
Ambient temperature (ta)	-20..+45 °C (-4..+113 °F)			
Rated Max. temp. (tc)	75 °C (167 °F)			
Dimensions	73 x 30 x 18 mm (2.87In x 1.8In x 0.71In)			

LED dimmer, easily operated by smartphone or tablet (Apple, Android) with the CASAMBI app

For LED strips and other modules for constant voltage

Free App from CASAMBI (Apple/Android):

- control of brightness and light colour
- configuration of luminaires and luminaires networks
- creation of scenes and animations (colour gradients)
- automatic detection of new devices
- intelligent timer and gallery functions
- protection settings of your luminaires network („just me“, „with password“,...)

You can setup a gateway, but it is not necessary

Integrated antenna

drawing: grey marking, do not cover with metal case)

Protection class: 3

Pollution degree: 1

Do not insert switches into the secondary circuit!

App for
iOS



App for
Android

