






SAFETY RULES

-  Do not connect the device to loads exceeding the permitted values.
-  Connect only in accordance with the diagram presented in the manual. Improper connections may be dangerous, it can damage the controller, and loss of the warranty.
-  DANGER! Risk of electric shock! Even with the device turned o, the outputs may be live. All assembly work should be ALWAYS performed with the disconnected power circuit.
-  Connecting the device to a power supply that does not meet the quality requirements specied in EN 50081-1, EN 50082-1, UL508, EN 60950 will invalidate the warranty.

WIRING DIAGRAM

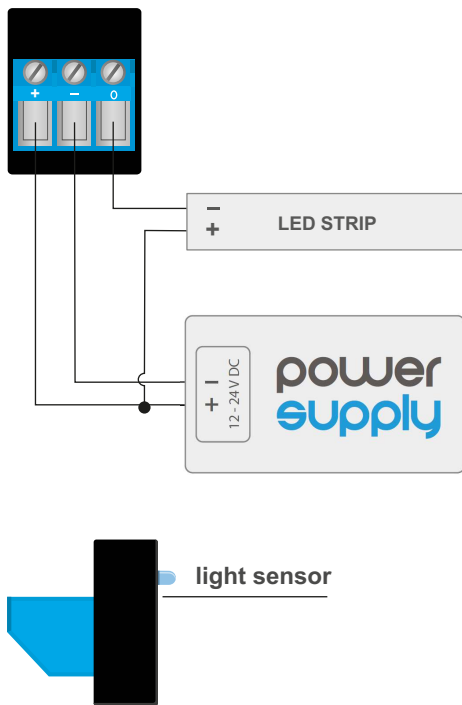

1 INSTALLATION

- Before installing the controller, disconnect the voltage in the supplied circuit. Remember that all assembly work should be carried out with the power supply disconnected.
- The controller should be mounted in a place protected from adverse environmental conditions, protected from access by third parties. It is advisable that the device is mounted in a stable and stationary position.
- Familiarize yourself with the diagram and then proceed with the assembly of the controller. Pay special attention to the designation of the controller connectors. Start by connecting the power wires: (+) (red or black with a white dotted line) and (-) (black).
- Connect (pay attention to the polarity) the LED strip. Mount the device in the target place using e.g. double-sided adhesive tape. The light sensor is located on the bottom of the device.
- Connect the device to the power supply and check if it works properly

TECHNICAL SPECIFICATIONS

supply voltage	12 - 24 V DC
maximum power	60 - 120 W
maximum current	5 A
energy consumption	< 0,1 W
sensor	optical, twilight
calibration	automatic
dimensions	23 x 17 x 22 mm (0.906 " x 0.669 " x 0.866 ")
protection level	IP20
mounting method	In the housing of another device, in the installation box.
connection method	screw joint
housing	made of polyurethane composition not containing halogens, self-extinguishing for thermal class B (130 °C)
controller operating temperature	From -20°C to +50°C

DISTRIBUTED BY

Wired4Signs USA, LLC
7669 Clinton Highway
Powell, TN 37849
USA

Email: info@w4susa.com
Phone: +1 (865) 339-4956



made in europe