


LUTRON – GREEN

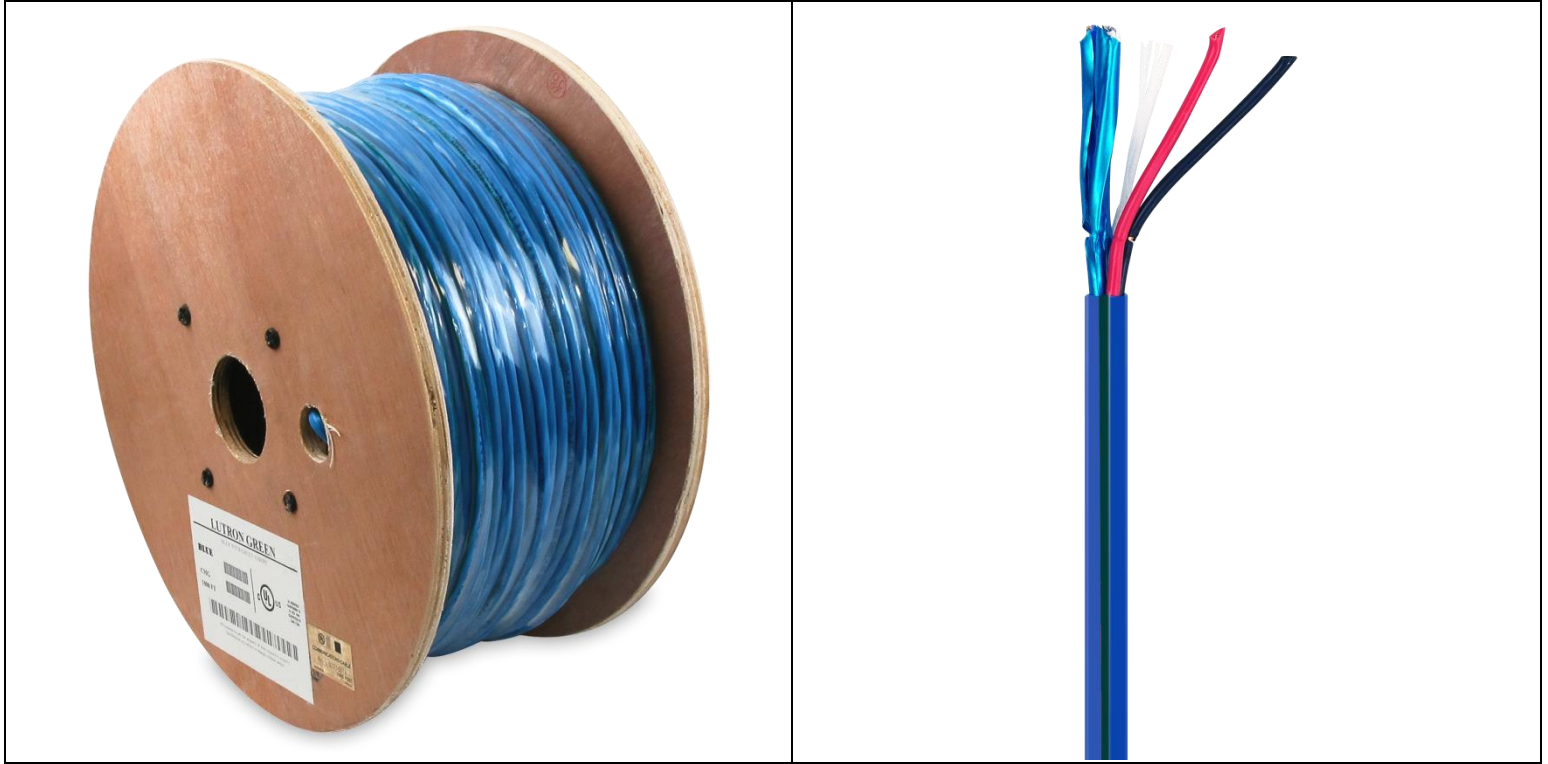

Part No. LUTRON-GREEN

Color. BLUE WITH GREEN STRIPE

Application:

- Power-limited circuit cables for use a fixed wiring within buildings (some are also marked for direct burial) principally for class 3 and class 2 circuits.

Description:

- **Rated Voltage (V)** 300
- **Rated Temperature (°C)** 75
- **Product Standard Certification** c(UL)CL3
- **Flame Test** FT4

LUTRON – GREEN

Construction:

- **Component A:** **1 Twisted Pair 2C**
- **Conductor** Standard Bare Copper
Construction (+/- 0.008mm) 22AWG:7/0.254
Stranded Dia. (mm) 0.78
- **Insulation** **FOAM PE**
Nom. Thickness (mm) 0.60
Insulation Dia.(+/-mm) 2.0
Color White & Blue
- **Drain Wire (Stranded Tinned Copper)** 7/0.20TC
- **Shield** **Aluminum/Polyester**
Coverage (%) $\geq 125\%$
- **Component B:** **2C**
- **Conductor** **Stranded Bare Copper**
Construction (+/- 0.008mm) 18AWG:42/0.16
Stranded Dia.(mm) 1.20
- **Insulation** **PVC**
Nom. Thickness (mm) 0.35
Insulation Dia.(+/-0.05mm) 1.9
Color: Black & Red
- **Component A.B Cable together** Ripcord 210Dx6 nylon thread
- **Jacket** **PVC**
Nom. Thickness (mm) 0.65
- **Outer Dia.(+/-0.10mm)** **5.60**
Jacket Marking As customer's request

