

**IDEALLY SUITED FOR:**  
Networking equipment  
Network closets  
VOIP and Telecom  
Security recording devices



## KEY FEATURES

Rotating LCD display includes battery time capacity indicator, voltage, and much more

Remote control load segment allows remote rebooting of devices

Pure sine wave output at all times

Flexible form factor allows rack mounted or tower deployment


Stay informed with Free monitoring Software or optional SNMP management

Allows up to 4 add on battery modules

37 Month Advance Replacement Warranty included standard

Lifetime \$ 150,000 Equipment Protection Policy





### Clean Power Quality

Ensure your sensitive equipment lasts longer and is more reliable by supplying it with quality power. The Network Pro RTX2 uses AVR to provide regulated voltage and outputs a pure sine wave.



### Advanced Communications

Network Pro RTX2 features advanced SNMP communications. SNMP monitoring includes voltage in/out, battery capacity remaining, power logs, UPS specific information, and remote outlet control. Receive alerts via text or email for the following: on battery, battery fail, battery change due, and more.



### LCD Display

State of the Art LCD display rotates to accommodate tower or rack mount installations. Provides real time status information and allows configuration of ups setup parameters. LCD display reports Volts in, Volts out, battery capacity, load level, and more.



### Hot Swappable Batteries

Maintenance is easy and inexpensive with user replaceable, hot-swappable battery trays. Save money on maintenance by using in-house personnel to change batteries when necessary.

## Specifications:

### Electrical Input

<b>Nominal Voltage</b>	110/115/120/127 VAC
<b>Voltage Range</b>	81-152 VAC
<b>Frequency(HZ)</b>	50/60Hz Auto Sensing
<b>Line Cord</b>	7.5 feet

### Electrical Output

<b>Output Voltage</b>	110/115/120/127 VAC
<b>Voltage Regulation</b>	± 1.5 % (on battery)
<b>Frequency (Hz)</b>	50 or 60 Hz +/- 1 Hz
<b>Load Segments</b>	Remote controlled load segment
<b>Wave Form</b>	True Sine Wave

### Communications

<b>Interface Type</b>	1 * USB port+ 1*RS-232 port + 1*EPO
<b>SNMP (Optional)</b>	Power management from SNMP manager and Web browser
<b>Monitoring/Shutdown</b>	Windows Vista/7/8,10, Linux, etc.
<b>Software</b>	Included at no charge

### Environmental

<b>Operation Temperature</b>	0-40 C
<b>Noise Level</b>	<45dBA
<b>Relative Humidity</b>	0 to 90% (without condensation)

### Standards and Certification

<b>Markings</b>	UL 1778 - tested by TUV, FCC
-----------------	------------------------------

## Network Pro RTX2 Adapts to Your Needs


- Tower or Rack-mount installation
- Extend backup time when needed by adding up to 4 extended battery modules
- Load shedding allows shutdown of non-critical equipment during prolonged outages
- Compact design fits into tight spaces



### Network Pro RTX Runtime Chart

Model	Load (watts) / Time in minutes								
	100	250	500	750	1000	1200	1350	1800	2700
<b>NP800RTX2</b>	60	18	6	N/A	N/A	N/A	N/A	N/A	N/A
+ 1 EBM	303	97	39.5	N/A	N/A	N/A	N/A	N/A	N/A
+ 2 EBM	579	190	80.5	N/A	N/A	N/A	N/A	N/A	N/A
+ 3 EBM	874	292	123.5	N/A	N/A	N/A	N/A	N/A	N/A
+ 4 EBM	1183	398	171.5	N/A	N/A	N/A	N/A	N/A	N/A
<b>NP1100RTX2</b>	83	25	10	5	N/A	N/A	N/A	N/A	N/A
+ 1 EBM	326	105	43	25	N/A	N/A	N/A	N/A	N/A
+ 2 EBM	602	198	84	50	N/A	N/A	N/A	N/A	N/A
+ 3 EBM	897	300	127	77	N/A	N/A	N/A	N/A	N/A
+ 4 EBM	1206	406	175	105	N/A	N/A	N/A	N/A	N/A
<b>NP1500RTX2</b>	154	49	20	12	7	6	5	N/A	N/A
+ 1 EBM	704	235	100	60	41	33	28	N/A	N/A
+ 2 EBM	1320	447	194	117	82	65	56	N/A	N/A
+ 3 EBM	1975	675	295	179	126	100	86	N/A	N/A
+ 4 EBM	2656	913	402	245	173	138	120	N/A	N/A
<b>NP2000RTX2</b>	198	62	25	15	9	7	6	4	N/A
+ 1 EBM	748	248	105	63	43	34	29	20	N/A
+ 2 EBM	1364	460	199	120	84	66	57	39	N/A
+ 3 EBM	2019	688	300	182	128	101	87	60	N/A
+ 4 EBM	2700	926	407	248	175	139	121	84	N/A
<b>NP2200RTX2</b>	240	77	31	17	12	9	8	5	N/A
+ 1 EBM	1160	377	163	97	69	54	38	29	N/A
+ 2 EBM	2141	718	314	190	135	107	75	57	N/A
+ 3 EBM	3178	1082	477	291	207	165	116	88	N/A
+ 4 EBM	4256	1462	648	398	283	226	160	122	N/A
<b>NP3000RTX2</b>	326	105	43	25	16	12	8	6	3.7
+ 1 EBM	1206	405	175	105	73	57	39	29	19
+ 2 EBM	2187	746	326	198	139	110	76	57	39
+ 3 EBM	3224	1110	489	299	211	168	117	88	61
+ 4 EBM	4302	1490	660	406	287	229	161	122	84

## Model Selection Guide

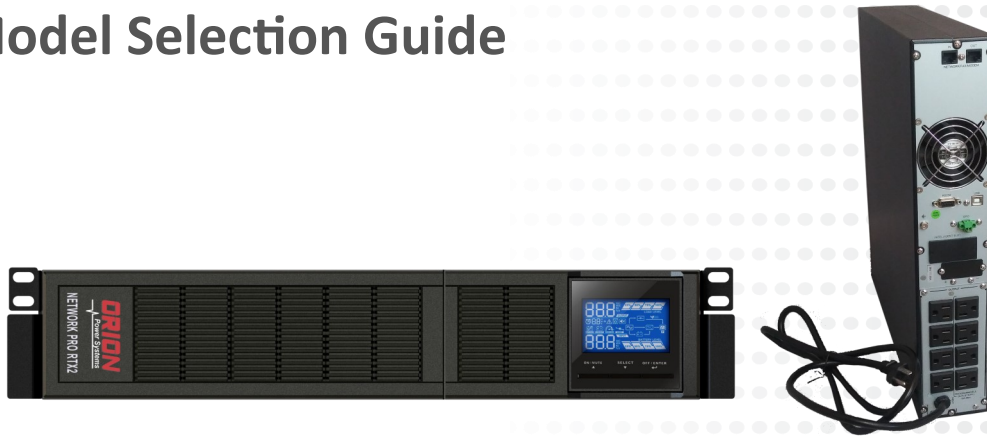

### Network Pro RTX2 Model Selection Guide : 120V 50/60HZ

Model #	Rating (VA/Watts)	Input	Output Receptacles	Dim. HxWxD (in.)	Weight (lbs.)
NP800RTX2	800/720	5-15P	(8) 5-15R	3.5 (2U) x 18 x 16	20
NP1100RTX2	1100/990	5-15P	(8) 5-15R	3.5 (2U) x 18 x 16	20
NP1500RTX2	1500/1350	5-15P	(8) 5-15R	3.5 (2U) x 18 x 21	43
NP2000RTX2	2000/1800	5-20P	(8) 5-20R	3.5 (2U) x 18 x 21	48
NP2200RTX2	2000/2000	5-20P	(8) 5-20R	3.5 (2U) x 18 x 25	61
NP3000RTX2	3000/2700	L5-30P	(6) 5-20R (1)L5-30R	3.5 (2U) x 18 x 25	65

### Extended Battery Modules and Options

NP1100RTX2EBM	For 800VA and 1100 VA	N/A	N/A	3.5 (2U) x 18 x 15	38
NP2000RTX2EBM	For 1500VA and 2000 VA	N/A	N/A	3.5 (2U) x 18 x 19	64
NP3000RTX2EBM	For 2200VA and 3000 VA	N/A	N/A	3.5 (2U) x 18 x 24	91
OPS-SNMP4-WEBCARD	Network card	N/A	N/A	N/A	3
OPS-Railkit	4 post rack supports	N/A	N/A	N/A	5
OPS-Relay4	Relay card	N/A	N/A	N/A	3
OPS-EMP4*	Environmental monitoring	N/A	N/A	N/A	3


\* Requires SNMP card

# ORION

Power Systems

Orion Power Systems manufactures ups systems from 625va to 120kVA along with power strips, surge suppression, and communication accessories. Professionals in the IT , security, and telecommunications industries count on Orion Power Systems to provide power protection that is reliable and on budget.

If you rely on clean power  
you can rely on Orion....  
Just like these clients



Orion Power Systems, Inc.  
2939 West Beaver Street  
Jacksonville, FL 32254

Toll-Free: 877.385.1654 Fax: 877.659.8638  
<http://www.orionpowersystems.com>