

Y-Type Mechanical Streetlighting Kit



Kit Includes:

EPDM Rubber Housing, Fuse Clips, Connecting Link (as Required), Silicone Lubricant

- ▶ Underground Mechanical Streetlight Splice Kit
- ▶ Watertight, Submersible & Re-Enterable
- ▶ Approved for use with aluminum or copper conductors
- ▶ Ensures a fully insulated, water-tight repair splice - no taping, heat shrink or mastic required
- ▶ Includes AL9CU Aluminum Connector

Cat. No.	Kit Type	Wire Range Copper	Wire Range Aluminum	Connector Hex Size	Dimensions (inches)		Case Qty
					Dia.	L	
67062	Y Type	#14 - #4	#14 - #2	3/16"	1-5/8"	6-3/4"	25


Streetlighting Splice Kit - Compression - Heat Shrink



- ▶ Rated for Cable Run/Tap Splices in Street/Parking Lot/Security Lighting Applications
- ▶ Cross Linked Polyolefin Heat Shrink Jacketing Material
- ▶ Provides Excellent Strain Relief, Impact & Abrasion Resistance
- ▶ Thermoplastic Adhesive Liner Seals Splice from Environment
- ▶ Electrolytic Copper C-Tap Compression Connectors
- ▶ 600V Rated for Primary Insulation, UV Resistant
- ▶ Operating Temperature: -55°C to 110°C (-67°F to 220°F)
- ▶ Kit Includes 2 Inner Sleeves, 1 Outer Sleeve & C-Taps
- ▶ #67049 Accommodates Ground Conductor

Cat. No.	Wire Range Solid	Wire Range Stranded	C-Tap Connectors	Voltage	Bag Qty
67048	#10	#12	2 pcs	600	1
67049	#10	#12	3 pcs	600	1

Cable Splicing - Motor Termination Kit - Heat Shrink

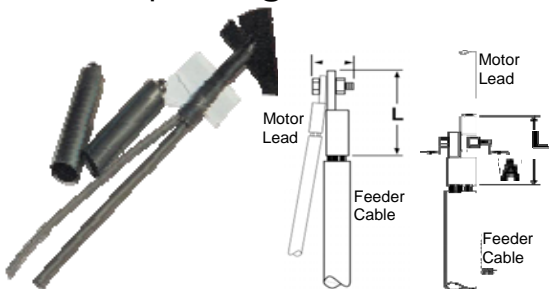

- ▶ Stub or In-Line Splice/Motor Termination Kits - 600 Volt
- ▶ Fast Easy Installation/Removal for Motor Maintenance/Change-Outs
- ▶ Heat Shrink Cap/Tubing & Mastic Sealant Combine for Excellent Environmental Seal
- ▶ Permanent Watertight Seal Protects Against Voltage Leakage, Deterioration, Cable Failure & Provides Corona Effect Relief
- ▶ Normal Service Temperature Range: -55°C to 110°C (-67°F to 220°F)
- ▶ Kit includes 3 Caps or Sleeves, 3 Pieces of Mastic Sealant & 3 Pieces of Protective Tape per Kit. Hardware not Included.

Cat. No.	Wire Range	Splice Type	Dim. A	Dim. L	Cap/Tube Length	Bag Qty	Case Qty
67032	#14 - #8	Stub	.625"	2.00"	3.50"	1	5
67033	#8 - #2	Stub	.750"	2.50"	4.00"	1	5
67034	#4 - 4/0	Stub	1.000"	3.50"	4.50"	1	5
67035	4/0 - 500	Stub	1.500"	5.50"	5.00"	1	5
67036	#8 - 4/0	In-Line	1.250"	5.00"	9.00"	1	5
67037	250 - 1000	In-Line	1.500"	8.00"	12.00"	1	5

Cable Splicing - 1KV Splice/Tap Kit - Heat Shrink



- ▶ In-line Splice/Tap Kit for Low Voltage (1000V) Applications
- ▶ Designed for In-line Split Bolt, Compression, Y-Tap, H-Tap, C-Tap Splices
- ▶ Cross Linked High Shrink Ratio Polyolefin Jacket Accommodates Odd Shapes
- ▶ Kit Includes Adhesive Lined Heat Shrinkable Wrap Around Sleeve with Flexible Stainless Steel Locking Channel, Mastic Sealant & Protective Strips
- ▶ 1000V Rated for Primary Insulation, UV Resistant
- ▶ Installation Temperature: -15°C to +50°C (5°F to +122°F)
- ▶ Packed in Sealed Plastic Bags
- ▶ Rated for use with Split Bolts up to #2 AWG (Main or Tap) Cable Sizes

Cat. No.	Main (Run) Wire Range	Branch (Tap) Wire Range	Sleeve Length (Inches)	Connector Length Max (Inches)	Voltage	Bag Qty	Case Qty
67016	#8 - #2	#10 - #2	6	2	1000	1	10
67017	#2 - 4/0	#10 - 4/0	8	4	1000	1	10
67018	4/0 - 500	#2 - 500	10	6	1000	1	10