




CI720

Network Stereo Zone Amplifier

ENGLISH

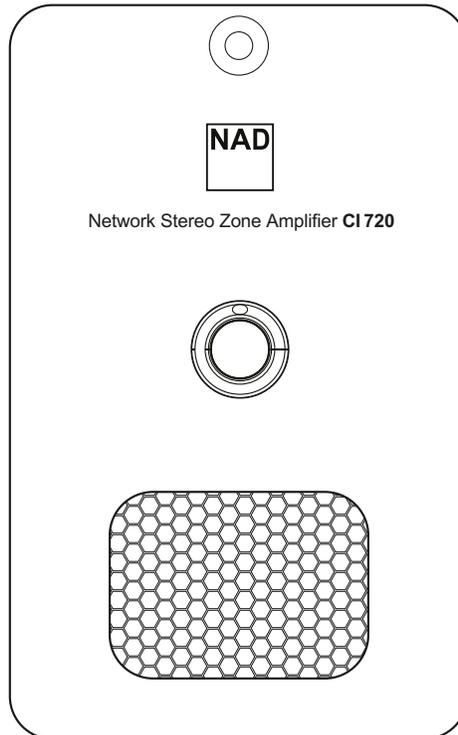

© NAD CI720

Owner's Manual

IMPORTANT SAFETY INSTRUCTIONS

SAVE THESE INSTRUCTIONS FOR LATER USE.


FOLLOW ALL WARNINGS AND INSTRUCTIONS MARKED ON THE AUDIO EQUIPMENT.

- 1 Read instructions** - All the safety and operating instructions should be read before the product is operated.
- 2 Retain instructions** - The safety and operating instructions should be retained for future reference.
- 3 Heed Warnings** - All warnings on the product and in the operating instructions should be adhered to.
- 4 Follow Instructions** - All operating and use instructions should be followed.
- 5 Cleaning** - Unplug this product from the wall outlet before cleaning. Do not use liquid cleaners or aerosol cleaners. Use a damp cloth for cleaning.
- 6 Attachments** - Do not use attachments not recommended by the product manufacturer as they may cause hazards.
- 7 Water and Moisture** - Do not use this product near water—for example, near a bath tub, wash bowl, kitchen sink, or laundry tub; in a wet basement; or near a swimming pool; and the like.
- 8 Accessories** - Do not place this product on an unstable cart, stand, tripod, bracket, or table. The product may fall, causing serious injury to a child or adult, and serious damage to the product. Use only with a cart, stand, tripod, bracket, or table recommended by the manufacturer, or sold with the product. Any mounting of the product should follow the manufacturer's instructions, and should use a mounting accessory recommended by the manufacturer.
- 9**  A product and cart combination should be moved with care. Quick stops, excessive force, and uneven surfaces may cause the product and cart combination to overturn.
- 10 Ventilation** - Slots and openings in the cabinet are provided for ventilation and to ensure reliable operation of the product and to protect it from overheating, and these openings must not be blocked or covered. The openings should never be blocked by placing the product on a bed, sofa, rug, or other similar surface. This product should not be placed in a built-in installation such as a bookcase or rack unless proper ventilation is provided or the manufacturer's instructions have been adhered to.
- 11 Power Sources** - This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supply to your home, consult your product dealer or local power company.
The primary method of isolating the amplifier from the mains supply is to disconnect the mains plug. Ensure that the mains plug remains accessible at all times. Unplug the AC power cord from the AC outlet if the unit will not be used for several months or more.
- 12 Grounding or Polarization** - This product may be equipped with a polarized alternating-current line plug (a plug having one blade wider than the other). This plug will fit into the power outlet only one way. This is a safety feature. If you are unable to insert the plug fully into the outlet, try reversing the plug. If the plug should still fail to fit, contact your electrician to replace your obsolete outlet. Do not defeat the safety purpose of the polarized plug.
- 13 Power - Cord Protection** - Power-supply cords should be routed so that they are not likely to be walked on or pinched by items placed upon or against them, paying particular attention to cords at plugs, convenience receptacles, and the point where they exit from the product.

- 14 Outdoor Antenna Grounding** - If an outside antenna or cable system is connected to the product, be sure the antenna or cable system is grounded so as to provide some protection against voltage surges and built-up static charges. Article 810 of the National Electrical Code, ANSI/NFPA 70, provides information with regard to proper grounding of the mast and supporting structure, grounding of the lead-in wire to an antenna discharge unit, size of grounding conductors, location of antenna discharge unit, connection to grounding electrodes, and requirements for the grounding electrode.

NOTE TO CATV SYSTEM INSTALLER

This reminder is provided to call the CATV system installer's attention to Section 820-40 of the NEC which provides guidelines for proper grounding and, in particular, specifies that the cable ground shall be connected to the grounding system of the building, as close to the point of cable entry as practical.

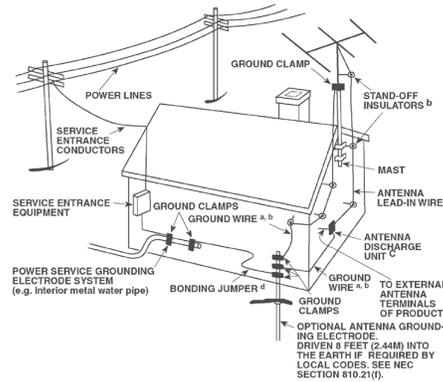

- 15 Lightning** - For added protection for this product during a lightning storm, or when it is left unattended and unused for long periods of time, unplug it from the wall outlet and disconnect the antenna or cable system. This will prevent damage to the product due to lightning and power-line surges.
- 16 Power Lines** - An outside antenna system should not be located in the vicinity of overhead power lines or other electric light or power circuits, or where it can fall into such power lines or circuits. When installing an outside antenna system, extreme care should be taken to keep from touching such power lines or circuits as contact with them might be fatal.
- 17 Overloading** - Do not overload wall outlets, extension cords, or integral convenience receptacles as this can result in a risk of fire or electric shock.
- 18 Object and Liquid Entry** - Never push objects of any kind into this product through openings as they may touch dangerous voltage points or short-out parts that could result in a fire or electric shock. Never spill liquid of any kind on the product.

WARNING: THE APPARATUS SHOULD NOT BE EXPOSED TO DRIPPING OR SPLASHING, AND OBJECTS FILLED WITH LIQUIDS, SUCH AS VASES, SHOULD NOT BE PLACED ON THE APPARATUS. AS WITH ANY ELECTRONIC PRODUCTS, USE CARE NOT TO SPILL LIQUIDS INTO ANY PART OF THE SYSTEM. LIQUIDS CAN CAUSE A FAILURE AND/OR A FIRE HAZARD.

19 Damage Requiring Service - Unplug this product from the wall outlet and refer servicing to qualified service personnel under the following conditions:

- a) When the power-supply cord or plug is damaged.
- b) If liquid has been spilled, or objects have fallen into the product.
- c) If the product has been exposed to rain or water.
- d) If the product does not operate normally by following the operating instructions. Adjust only those controls that are covered by the operating instructions as an improper adjustment of other controls may result in damage and will often require extensive work by a qualified technician to restore the product to its normal operation.
- e) If the product has been dropped or damaged in any way.
- f) when the product exhibits a distinct change in performance-this indicates a need for service.

20 Replacement Parts - When replacement parts are required, be sure the service technician has used replacement parts specified by the manufacturer or have the same characteristics as the original part. Unauthorized substitutions may result in fire, electric shock, or other hazards.

21 Safety Check - Upon completion of any service or repairs to this product, ask the service technician to perform safety checks to determine that the product is in proper operating condition.

22 Wall or Ceiling Mounting - The product should be mounted to a wall or ceiling only as recommended by the manufacturer.

23 Heat - The product should be situated away from heat sources such as radiators, heat registers, stoves or other products (including amplifiers) that produce heat.

WARNING

TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS PRODUCT TO RAIN OR MOISTURE.

CAUTION

TO PREVENT ELECTRIC SHOCK, MATCH WIDE BLADE OF PLUG TO WIDE SLOT, FULLY INSERT.



THE LIGHTNING FLASH WITH ARROWHEAD SYMBOL, WITHIN AN EQUILATERAL TRIANGLE, IS INTENDED TO ALERT THE USER TO THE PRESENCE OF UNINSULATED "DANGEROUS VOLTAGE" WITHIN THE PRODUCT'S ENCLOSURE THAT MAYBE OF SUFFICIENT MAGNITUDE TO CONSTITUTE A RISK OF ELECTRIC SHOCK TO PERSONS.



THE EXCLAMATION POINT WITHIN AN EQUILATERAL TRIANGLE IS INTENDED TO ALERT THE USER TO THE PRESENCE OF IMPORTANT OPERATING AND MAINTENANCE (SERVICING) INSTRUCTIONS IN THE LITERATURE ACCOMPANYING THE APPLIANCE.



The equipment draws its nominal non-operational power from the AC outlet with its POWER switch at the ON position.

The socket-outlet shall be installed near the apparatus and shall be easily accessible.

CAUTION

Changes or modifications to this equipment not expressly approved by NAD Electronics for compliance could void the user's authority to operate this equipment.

CAUTION REGARDING PLACEMENT

To maintain proper ventilation, be sure to leave a space around the unit (from the largest outer dimensions including projections) that is equal to or greater than shown below.

Left and Right Panels: 10 cm

Rear Panel: 10 cm

Top Panel: 10 cm

IMPORTANT SAFETY INSTRUCTIONS

NOTES ON ENVIRONMENTAL PROTECTION



At the end of its useful life, this product must not be disposed of with regular household waste but must be returned to a collection point for the recycling of electrical and electronic equipment. The symbol on the product, user's manual and packaging, point this out.

The materials can be reused in accordance with their markings. Through re-use, recycling of raw materials or other forms of recycling of old products, you are making an important contribution to the protection of our environment. Your local administrative office can advise you of the responsible waste disposal point.

INFORMATION ABOUT COLLECTION AND DISPOSAL OF WASTE BATTERIES (DIRECTIVE 2006/66/EC OF THE EUROPEAN PARLIAMENT AND THE COUNCIL OF EUROPEAN UNION) (FOR EUROPEAN CUSTOMERS ONLY)



Pb

Batteries bearing any of these symbols indicate that they should be treated as "separate collection" and not as municipal waste. It is encouraged that necessary measures are implemented to maximize the separate collection of waste batteries and to minimize the disposal of batteries as mixed municipal waste.



Hg

Cd

End-users are exhorted not to dispose waste batteries as unsorted municipal waste. In order to achieve

a high level of recycling waste batteries, discard waste batteries separately and properly through an accessible collection point in your vicinity. For more information about collection and recycling of waste batteries, please contact your local municipality, your waste disposal service or the point of sale where you purchased the items.

By ensuring compliance and conformance to proper disposal of waste batteries, potential hazardous effects on human health is prevented and the negative impact of batteries and waste batteries on the environment is minimized, thus contributing to the protection, preservation and quality improvement of the environment.

RECORD YOUR MODEL NUMBER (NOW, WHILE YOU CAN SEE IT)

The model and serial number of your new CI 720 are located on the back of the cabinet. For your future convenience, we suggest that you record these numbers here:

Model no:

Serial no:

THANK YOU FOR CHOOSING NAD.

The CI 720 features Bluesound's proprietary BluOS operating system, and allows you to access, control and stream music playlists to multiple BluOS-enabled zones in the home using simple touch-screen commands. The CI 720's integrated HybridDigital™ amp can drive any speaker to lifelike sound levels without adding noise or distortion. By focusing on how to improve musical performance while consuming less power, NAD has taken CI amplification to new lows, with lower distortion, lower noise and lower power consumption.

As with all our products, NAD's "Music First" design philosophy guided the CI 720's design. We have also been careful to ensure that the CI 720 is as musically transparent, faithful to every detail and spatially accurate as possible, incorporating much of what we've learned from more than a quarter-century's experience designing audio, video and home-theater components.

We encourage you to take a few minutes now to read right through this manual. Investing a little time here at the outset might save you a good deal of time later, and is by far the best way to ensure that you make the most of your investment in the CI 720.

For warranty information contact your local distributor.

NAD SHALL NOT BE HELD LIABLE FOR ANY TECHNICAL OR USER INTERFACE DISCREPANCIES IN THIS MANUAL. THE CI 720 OWNER'S MANUAL MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE. CHECK OUT THE NAD WEBSITE FOR THE LATEST VERSION OF THE CI 720 OWNER'S MANUAL.

WHAT'S IN THE BOX

Packed with your CI 720 you will find

- Two detachable mains power cord
- Ethernet cable
- Speaker terminal block
- Screw (for use in installing CI 720 to optional RM720 Rack Mount)
- Quick Setup Guide


SAVE THE PACKAGING

Please save the box and the packaging that came with the CI 720. Should you move or need to transport your CI 720, this is the safest container to use. We've seen too many otherwise perfect components damaged in transit for lack of a proper shipping carton. So please, save that box!



INSTALLATION

The CI 720 can be used as a stand-alone unit or can be mounted in the optional RM720 Rack Mount accessory where up to 6 units of CI 720 can be accommodated without a single modification in a 3U rack space.

The CI 720 can also be installed to a fixture or wall using the two hanging holes on the side of the CI 720. Below is a description on how to hang or install the CI 720 to the wall.

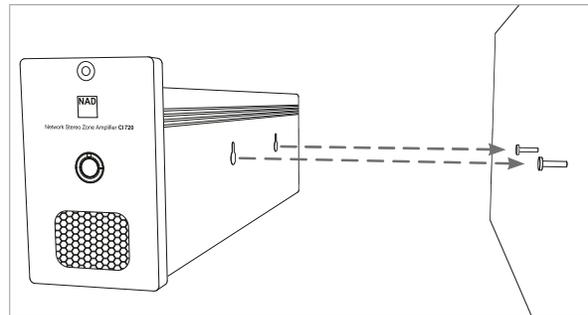

IDENTIFICATION OF CONTROLS

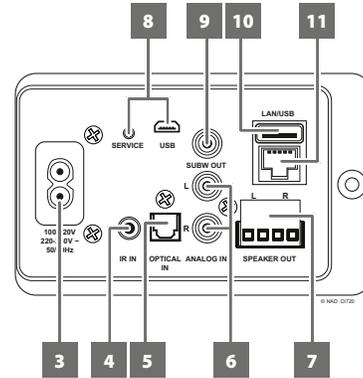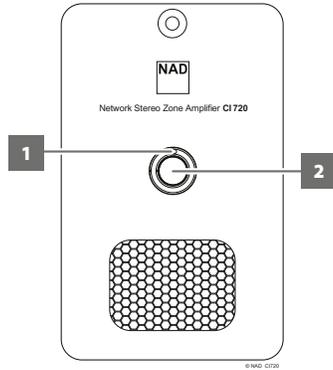

1 STATUS INDICATOR

This is an indicator of network connectivity. Below is a table of the LED blink codes and their corresponding descriptions.

LED BLINK CODE	DESCRIPTION
Short blue flash, then red	Powering up, rebooting
Solid red	Booting up
Solid red	Cannot boot up; drive error
Solid white	Indexing
Solid blue	Connected to network – ready to use with Bluesound App
Red pulse	No internet gateway
Alternate flashing red and green	Upgrade mode
Flashing red	Factory reset in progress

2 STANDBY BUTTON

- Press and hold this button to bring the CI 720 to standby mode.

3 AC MAINS INPUT

- The CI 720 comes supplied with two separate AC mains power cords. Select the AC mains power cord appropriate for your region. An adaptor may be necessary in certain regions.
- Always disconnect the plug from the wall outlet first, before disconnecting the other end from CI 720's AC mains power cord.

4 IR IN

- This input is connected to the output of an IR (infrared) repeater (Xantech or similar) or the IR output of another component to allow control of the CI 720 from a remote location.
- To program IR Remote commands into your CI 720 via IR IN, select from the App the **Settings Menu - Player-IR Remote**. Simply select the function desired from the **IR Remote Menu**, point an IR remote control at the IR repeater and press the button to perform that function. Once programmed, a check-mark will appear in the Configure IR Trigger function list.

5 OPTICAL IN

- Connect to the corresponding optical digital output of sources such as CD or BD/DVD players, digital cable box, digital tuners and other applicable components. The source will appear as an Optical Input in the navigation drawer of the BluOS App.

6 ANALOG IN

- Input for line level sources such as CD player, tuner or any compatible devices. Use a twin RCA-to-RCA lead to connect the source device's left and right "Audio Output" to this input. The source will appear as an Analog Input in the navigation drawer of the BluOS App.

7 SPEAKER OUT

- Connect the speaker cables to the supplied speaker terminal block with reference to CI 720's speaker terminal markings on the rear panel.
- Connect CI 720's Right speaker terminals marked "R +" and "R -" to the corresponding "+" and "-" terminals of your designated right speaker. Repeat the same for CI 720's Left speaker terminals and corresponding left speaker.

8 SERVICE/USB

- Use the SERVICE port in conjunction with USB (Type B mini) to manually load firmware to the CI 720. This is not for consumer use. Only authorized service personnel can access this USB port and SERVICE button.

9 SUBW OUT

- Connect SUBW OUT to a powered subwoofer. All low frequency information is sent to the subwoofer.

10 LAN

- A wired Ethernet connection is required to setup the CI 720. Using the supplied Ethernet cable, connect one end of the Ethernet cable to CI 720's LAN port and the other end to the corresponding LAN port of your wired Ethernet broadband router.

11 USB (Type A)

- Connect a USB mass storage device to the USB input. Typical USB mass storage device compatible with CI 720 include portable flash memory devices and external hard drives (FAT32 recommended).
- A notification will be shown in the App if a USB device is inserted. Click on USB in the navigation drawer to browse content.

MAKING THE MOST OUT OF YOUR CI 720

Download the BluOS Controller App from the respective App stores of Apple iOS devices (iPad, iPhone and iPod), Android devices, Kindle Fire and Windows or Mac desktops.

Launch the BluOS Controller App and explore everything from your streaming music services, internet radio stations, networked music collections and favorites with quick and easy single-search discovery.

Visit support.bluesound.com for more information about the BluOS Controller App, how it interfaces with your CI 720 and other operational guidelines.

CI 720 SPECIFICATIONS

AUDIO	
Rated power	60W
Rated distortion	≤0.005%
Signal-to-noise ratio	-110 dBA
Sample rate	32 - 192 kHz
Bit depth	16-24 bit
Supported file formats	MP3, AAC, WMA, OGG, WMA-L, FLAC, ALAC, WAV, AIFF
Supported Cloud Services	WiMP, Rdio, Slacker Radio, Qobuz, HighResAudio, JUKE, Deezer, Murfie, HDTracks, Spotify, TIDAL, Napster, Rhapsody
Free Internet Radio	TuneIn Radio, iHeartRadio
CONNECTIVITY	
INPUT	Analog: RCA stereo
	SPDIF: Optical (TOSLINK)
	USB: Type A (for USB memory stick and supported peripherals - FAT32 formatted) Type B mini (for servicing purposes only)
	IR IN: 3.5 mm jack
OUTPUT	Subwoofer OUT
	Speaker OUT: Phoenix Speaker connection block
NETWORK	Ethernet/LAN: Ethernet RJ45, GigE
USER INTERFACE	Free BluOS Controller App available for download from the respective App stores of Apple iOS devices (iPad, iPhone and iPod), Android devices, Kindle Fire and Windows or Mac OS X desktops.
	Front panel button
SUPPORTED OPERATING SYSTEMS	Music playback from network shares on the following desktop operating systems: Windows Vista SP2, Windows 7 SP1 and Windows 8.1. Mac OS X 10.7, 10.8 and 10.9
GENERAL	
AC power supply	100 - 240V 50/60 Hz
Standby power	6W (Network standby mode)
Unit dimensions (L x W x D)	70 x 120 x 350 mm
	2 ¹³ / ₁₆ x 4 ³ / ₄ x 13 ¹³ / ₁₆ inches
Shipping weight	1.6 kg (3.5 lbs)

The CI720 specifications may be subject to change without prior notice. Check out www.nadelectronics.com for the latest specifications and features of the CI720.



www.NADelectronics.com

**©2016 NAD ELECTRONICS INTERNATIONAL
A DIVISION OF LENBROOK INDUSTRIES LIMITED**



All rights reserved. NAD and the NAD logo are trademarks of NAD Electronics International, a division of Lenbrook Industries Limited.
No part of this publication may be reproduced, stored or transmitted in any form without the written permission of NAD Electronics International.
While every effort has been made to ensure the contents are accurate at the time of publication, features and specifications may be subject to change without prior notice.

C1720_ENG_OM_V03 - JUL 2016

NAD CI 720 Network Stereo Zone Amplifier

Quick Setup Guide

WHAT'S IN THE BOX



Power connector x 2



Ethernet cable




Speaker connector

IMPORTANT

- Visit <https://support.bluesound.com> for more information and assistance about setup guides and getting the most out of your CI 720.
- The professional custom rack accessory NAD RM720 can accommodate up to six sets of CI 720s without a single modification.


CONNECT

EXTERNAL DEVICES

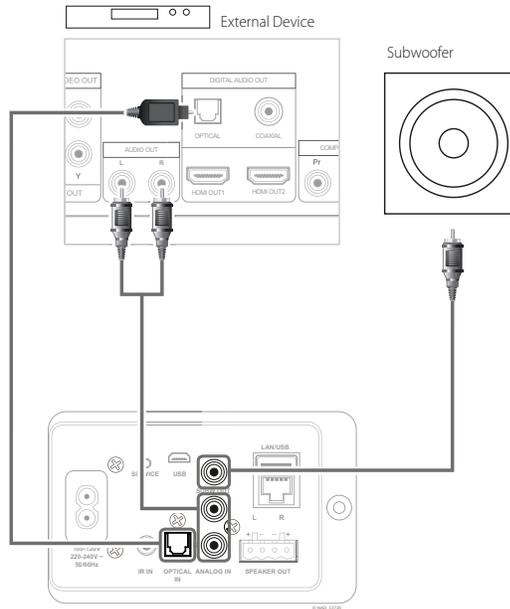


CONNECT

SPEAKER TERMINAL BLOCK AND NETWORK

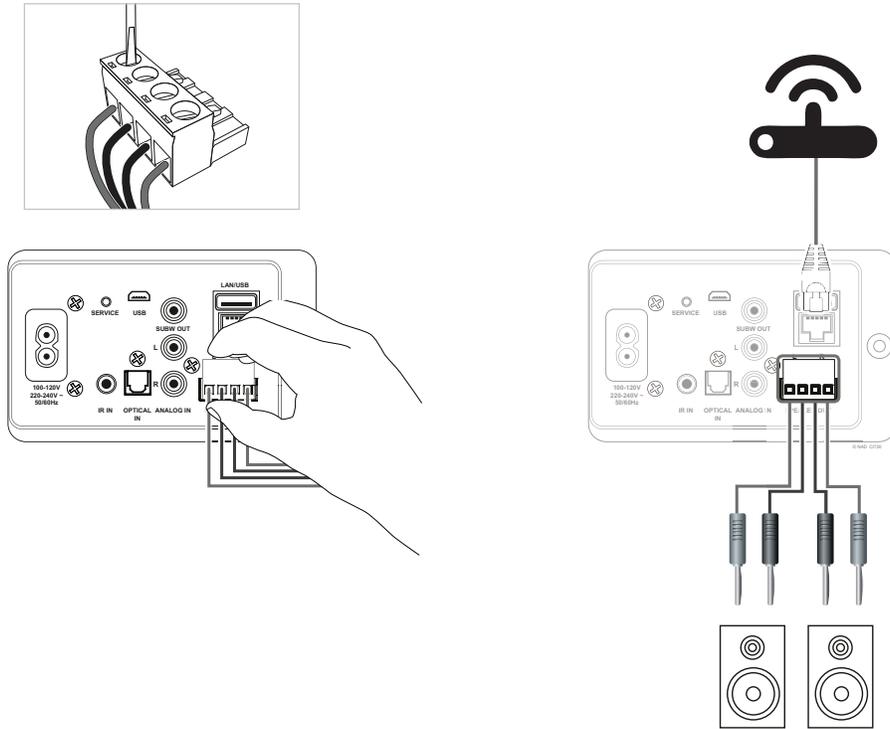

CONNECT

POWER

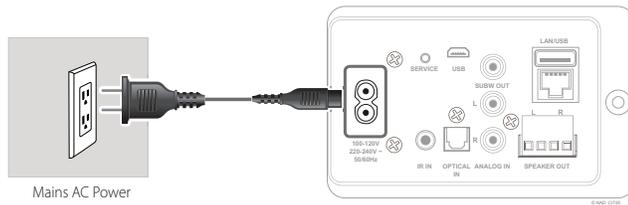

DOWNLOAD

BluOS CONTROLLER APP

The BluOS Controller App for Apple iOS devices (iPhone, iPad, iPod), Android devices, Kindle Fire and Windows or Mac desktops are available for download from their respective App stores.



CONNECT

MUSIC

Launch the App and explore – everything from your streaming music services, internet radio stations, networked music collections and favorites with quick and easy single-search discovery.



CI 720 Network Stereo Zone Amplifier

RM 720 Rack Mount Accessory



Six CI 720 mounted in RM720 rack (optional accessory)

The 60-watt per channel, single-zone CI 720 Network Stereo Zone Amplifier with HybridDigital™ amplification technology is the perfect addition to today's most advanced custom home audio systems. Featuring 60 watts per channel, and powered by BluOS™, the advanced music management operating system, the CI 720 allows you to access and stream 24-bit high-res music with the control of a smartphone or tablet via Ethernet and third-party control systems like Control4, Crestron, RTI and URC.

Simple, Single-App Integration & Control ▾

The CI 720 features Bluesound's proprietary BluOS operating system, and allows you to access, control and stream music playlists to multiple BluOS-enabled zones in the home using simple touch-screen commands. The CI 720's "blade" form factor allows up to six Network Stereo Zone Amplifiers to be installed neatly into a single 3U rack space, while its highly efficient energy-saving amplifier and thermostatic fan cooling adds enhanced reliability.

Powerful Single-Zone Performance ▾


With 60 watts per channel, and up to 165 watts of Dynamic Power on tap, the CI 720's integrated HybridDigital™ amp can drive any speaker to lifelike sound levels without adding noise or distortion. By focusing on how to improve musical performance while consuming less power, NAD has taken CI amplification to new lows, with lower distortion, lower noise, and lower power consumption.

NAD RM 720 Rack Mount Accessory ▾

A professional custom rack accessory is also available with innovative shelves that accommodates up to six CI 720s without a single modification in a 3U rack space. The RM 720 includes blanking plates for a neat front panel when less than six amplifiers are installed.

FEATURES & DETAILS

- ▶ 1 Stereo zone with HybridDigital™ amplification
- ▶ 2 x 60W
- ▶ Subwoofer out
- ▶ 3U height 'Blade' Chassis, up to six units fit in one rack space
- ▶ Ethernet connectivity
- ▶ Analogue audio input
- ▶ Digital optical input
- ▶ USB input
- ▶ Uses standard network protocols
- ▶ Universal voltage (100 ~ 240)
- ▶ Thermostatic fan cooling
- ▶ Third party control and automation integration drivers available

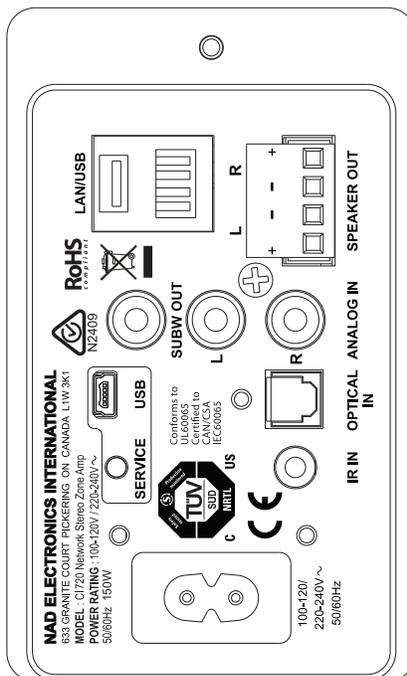

Specifications CI 720 ▾

Supported Operating Systems	Microsoft Windows VISTA, 7, 8, 10, Apple Macintosh	
Supported File Formats	MP3, AAC, WMA, WMA-L, OGG, FLAC, ALAC, WAV, AIFF	
Supported Cloud Services	WiMP, Slacker Radio, HighResAudio, JUKE, Deezer, Murfie, HDTracks, Spotify, TIDAL, Napster, Rhapsody	
Free Internet Radio	TuneIn Radio, iHeartRadio	
Rated Power	2 x 60W	
Rated Distortion	≤0.005%	
Signal-to-Noise Ratio	-110dBA	
Sample Rate	32 - 192kHz	
Bit Depth	16 - 24	
CONNECTIONS		
INPUT		
Analogue	RCA Stereo	
SPDIF	Optical (TOSLINK)	
USB	Type A (for USB memory stick and supported peripherals - FAT32 formatted) Type B Mini USB	
IR IN	3.5mm Jack	
OUTPUT		
Subwoofer OUT		
Speaker OUT	Phoenix Speaker connection block	
NETWORK		
Ethernet/LAN	Ethernet RJ45, GigE	
USER INTERFACE		
Power	Front Panel Button	
GENERAL		
Standby Power	6W (Network Standby Mode)	RM 720 Rack Mount Accessory
Dimensions (W x H x D)*	70 x 120 x 350mm (2.81 x 4.75 x 13.81")**	480 x 135 x 460mm (18.9 x 2.3 x 18.1")**
Weight	1.6kg (3.5lb)	4.28kg (9.45lb)

* Gross dimensions include feet, extended buttons and rear panel terminals. ** Non-metric measurements are approximate. NAD Electronics will not assume any liability for errors being made by retailers, custom installers, cabinet makers, or other end users based on information contained in this document. Note: Installers should allow a minimum clearance of 55mm for wire/cable management.





GARANTIE DE L'AMÉRIQUE DU NORD

NAD Electronics of America et Lenbrook/NAD Canada garantissent que la présente composante est exempte de tout vice de matériau et de fabrication selon les modalités suivantes :

Composantes électroniques (syntonisateurs, pré-amplificateurs, amplificateurs, amplificateurs intégrés, récepteurs, processeurs A/V et produits A/V intégrés)	2 ans, pièces et main-d'oeuvre
Composantes électromécaniques (lecteurs CD, lecteurs DVD, lecteur de Bluray et tables tournantes)	2 ans, pièces et main-d'oeuvre

La présente garantie est valide uniquement dans le pays où le produit a été acheté et n'est pas transférable. Elle est offerte en exclusivité à la personne ayant effectué l'achat, à l'origine, chez un dépositaire agréé de produits NAD. Seuls les dépositaires agréés peuvent se présenter en cette qualité, et l'acheteur peut vérifier la qualité de dépositaire agréé du marchand en communiquant avec NAD/Lenbrook au numéro suivant: 1-800-263-4641, ou visitez le site www.NADelectronics.com.

Obligation de NAD :

Si, pendant la durée de la garantie, la composante NAD cesse de fonctionner correctement en raison d'un vice de fabrication, NAD/Lenbrook, à leur seule discrétion, répareront ou remplaceront celle-ci gratuitement.

Pour une réparation :

Pour faire réparer le produit, veuillez l'apporter, avec la facture ou le coupon de caisse original, à votre dépositaire NAD. Si cet établissement n'est pas un centre de réparation NAD autorisé, il vous indiquera où se trouve le centre le plus proche. Vous pouvez aussi appeler au 1 800 263-4641 pour connaître l'emplacement du centre de réparation NAD agréé le plus proche.

Ce qui nous payons :

Nous assumons tous les frais de main-d'oeuvre et de matériaux des articles garantis, mais ne payons pas les frais d'expédition si vous devez faire parvenir le produit à NAD/Lenbrook ou à un centre de réparation NAD agréé. Si les réparations sont couvertes par la garantie, NAD/Lenbrook ou le centre de réparation assumeront les frais de transport pour le retour de votre produit.

Étendue de la garantie :

Le présente garantie ne couvre par les composantes :

1. endommagées dans le transport ou dans un cas de force majeure;
2. soumises à une trop forte charge, utilisées de façon abusive, mal utilisées ou combinées à un équipement défectueux ou inapproprié ou encore utilisées d'une manière contraire aux directives données dans le manuel accompagnant le produit;
3. réparées par du personnel non autorisé;
4. dont le numéro de série a été enlevé ou altéré.

LE GARANT NE POURRA, EN AUCUNE CIRCONSTANCE, ÊTRE TENU RESPONSABLE POUR LES DOMMAGES ACCESSOIRES, qu'ils résultent de l'inexécution d'une garantie explicite ou indirecte, d'un délit, d'une négligence ou d'une autre cause.

Certains états et certaines provinces ne permettent pas l'exclusion ou la limitation des dommages accessoires; il est possible que les limitations et exclusions ci-dessus ne s'appliquent pas à vous. La présente garantie vous accorde des droits reconnus par la loi. Il se pourrait que vous en ayez d'autres, qui peuvent varier d'un état ou d'une province à l'autre ou d'un pays à l'autre.

IMPORTANT : La garantie peut être différente d'un pays à un autre. Pour la garantie dans les pays hors de l'Amérique du Nord, veuillez contacter votre marchand ou votre distributeur local.

AVERTISSEMENT

NE CONFIEZ PAS LA RÉPARATION DU PRODUIT À UNE PERSONNE NON AUTORISÉE. LES PIÈCES NÉCESSAIRES POUR VEILLER À CE QUE VOTRE PRODUIT FONCTIONNE COMME À L'ORIGINE NE PEUVENT ÊTRE OBTENUES QUE PAR L'ENTREMISES DES DÉPOSITAIRES ET DES DISTRIBUTEURS AGRÉÉS. LA PRÉSENTE GARANTIE EST NULLE SI L'ÉQUIPEMENT A ÉTÉ ALTÉRÉ OU SI DE PIÈCES INADÉQUATES ONT ÉTÉ UTILISÉES.

NAD Electronics of America, Lenbrook/NAD Canada, 633 Granite Court, Pickering, Ontario L1W 3K1



NORTH AMERICA WARRANTY

NAD Electronics of America and Lenbrook/NAD Canada warrants this component to be free from all defects in materials and workmanship as follows:

Electronic components (tuners, preamplifiers, amplifiers, integrated amplifiers, receivers, A/V processors, & integrated A/V products)
Electro-mechanical products (CD players, DVD Players, BD players and turntable)

2 years, parts & labour
2 years, parts & labour

This warranty is valid only in the country of purchase. This warranty is non-transferable, and is valid for the first, original purchaser purchasing from an Authorized Dealer of NAD products. Only Authorized Dealers represent themselves as such, and purchasers may confirm the status of Authorized Dealers by calling NAD/Lenbrook at 1-800-263-4641, or at NADelectronics.com.

What we will do:

Should your NAD component fail to function properly due to a manufacturing defect, NAD/Lenbrook, at its sole discretion, will repair or replace it free of charge during the warranty period.

How to obtain service:

To obtain warranty service, please bring your unit along with the original invoice or bill of sale to your NAD dealer. If it is not an authorized NAD service centre, you will be directed to the nearest one or you may call 1-800-263-4641 for the location of the nearest NAD service centre.

Note: The NAD warranty requires proof-of-purchase prior to any in-warranty repairs. Always retain your original sales slip.

What we will pay for:

We will pay all labour and material expenses for covered items, but you must pay any shipping charges if it is necessary to ship the product to NAD/Lenbrook, or to an authorized NAD service centre. If the repairs are covered by the warranty, NAD/Lenbrook or the NAD service centre will pay the return shipping charges.

What is not covered:

This warranty does not cover a component which has been:

1. Damaged in transit or by act of God;
2. Overloaded, abused, misused, or operated with faulty or unsuitable equipment, or contrary to instructions contained in the accompanying product manual;
3. Serviced by unauthorized personnel;
4. The serial number has been altered or removed.

IN NO EVENT SHALL THE WARRANTOR BE LIABLE FOR INCIDENTAL, OR CONSEQUENTIAL DAMAGES, whether damages resulting from breach of express or implied warranties, tort, negligence, or otherwise.

Some states (provinces) do not allow exclusion or limitation of incidental or consequential damages so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from state (province) or between countries.

IMPORTANT: Warranty in other countries may vary. For all warranty in countries outside of North America please contact the dealer you purchased from or your local distributor.

WARNING

DO NOT ENTRUST ANY REPAIR WORK TO UNAUTHORIZED PERSONS. THE COMPONENTS NECESSARY TO MAINTAIN THE ORIGINAL PERFORMANCE OF THIS PRODUCT ARE AVAILABLE ONLY THROUGH AUTHORIZED NAD DEALERS AND DISTRIBUTORS. THE WARRANTY WILL BE INVALIDATED IF THE EQUIPMENT IS TAMPERED WITH OR INCORRECT PARTS ARE SUBSTITUTED.

NAD Electronics of America, Lenbrook/NAD Canada, 633 Granite Court, Pickering, Ontario L1W 3K1