
4 Pair 110 Connecting Block, 100 PK

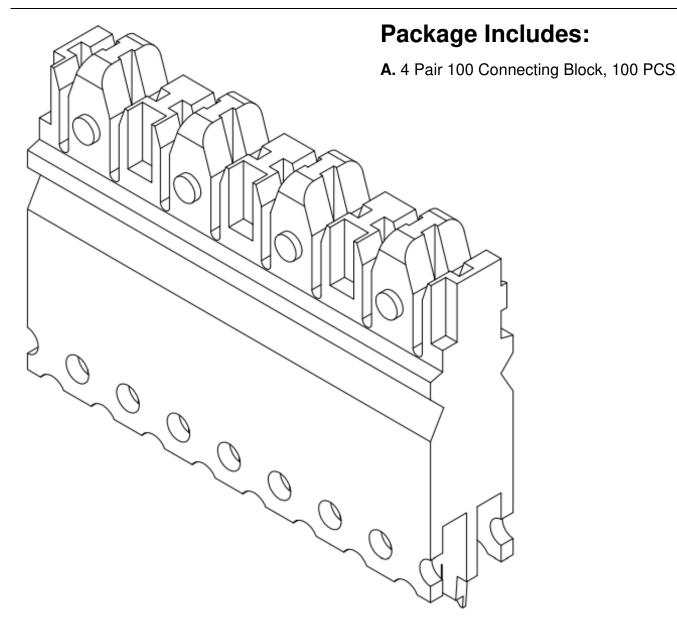


Features and Benefits


- Designed for voice and data applications
- Performance exceeds Category 5e connecting hardware requirements specified in TIA/EIA-568-C.2
- Color coded and designed for repeated use
- Accepts 26-22 AWG solid or stranded wires
- Used with IC11O wiring blocks and IC11OTC termination caps
- Country Of Origin: Taiwan
- TAA Compliant


Part No: IC110CB4PC

Rev: A Page 1 of 2 888-ASK-4ICC icc.com csr@icc.com



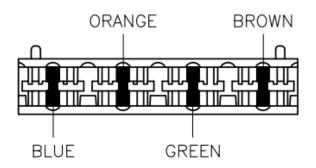

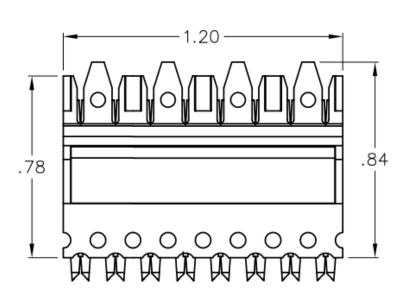

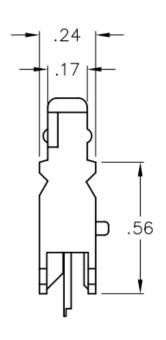

CAT 5e CONNECTING HARDWARE REQUIREMENTS										
FREQUENCY (MHz)	1.0	4.0	8.0	10.0	16.0	20.0	25.0	31.25	62.5	100
NEXT LOSS (db)	65.0	65.0	64.9	63.0	58.9	57.0	55.0	53.1	47.1	43.0
FEXT LOSS (db)	75.1	63.1	57.0	55.1	51.0	49.1	47.1	45.2	39.2	35.1
RETURN LOSS (db)	35.0	35.0	35.0	35.0	35.0	34.0	32.0	30.1	24.1	20.0
INSERTION LOSS(db)	0.10	0.10	0.10	0.10	0.20	0.20	0.20	0.20	0.30	0.40

NOTE: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:

A. CONTACT: COPPER ALLOY, 100 MICRO INCHES BRIGHT SOLDER OVER

100 MICRO INCHES OF NICKEL UNDERPLAT

B. HOUSING: ABS, UL 94V-0

Part No: IC110CB4PC

Rev: A Page 2 of 2 I 888-ASK-4ICC icc.com csr@icc.com

