




SELECTING PROPANE

If you want to start your generator using propane, follow step 1, then continue with the remaining steps 3-7 below.

Step 1: Connect the included propane line to the generator inlet located on the panel and connect the other end to the propane tank.

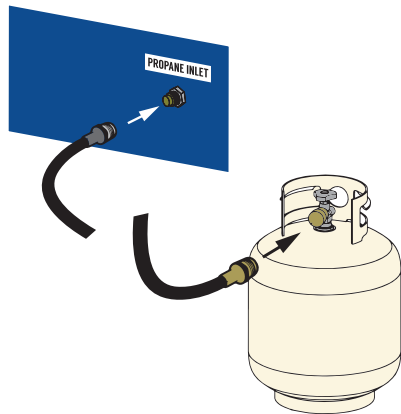

OR



SELECTING GASOLINE


If you want to start your generator using gas, follow steps 1-2, then continue with the remaining steps 3-7 below.

Step 1: Check the generator for gasoline. Add as needed.


Step 2: Turn fuel valve on by rotating valve clockwise.

CONTINUE STARTUP STEPS WITH EITHER FUEL


Step 3: Switch the main breaker to OFF.




Step 4: Switch the battery switch to ON.




Step 5: Switch the idle control switch to OFF.



Step 6: Press the start button to start the generator.

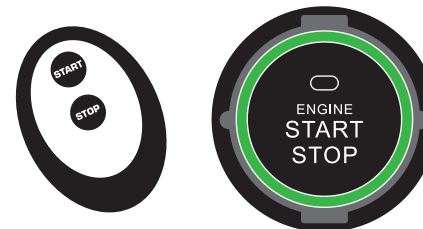

Step 7: Once the generator is running, turn the main breaker to ON and plug devices in.



ASSEMBLING YOUR GENERATOR

Step 1: Slide the top of the box off the generator, and continue with the following steps before taking the generator off the pallet.



Step 2: Insert the axle bolts through frame.



Step 3: Secure axles to frame with retaining pins.



Step 4: Place one of the washers onto each axle.



Step 5: Place the wheels onto the axles.



Step 6: Place the outside washers onto each of the axles.



Step 7: Place the cotter pin through the hole at the end of each axle to secure the wheels.



Step 8: Secure the support legs to the frame with the provided lock nuts.



Step 9: Attach the handles to the brackets on the frame using the provided bolts and nuts.



Step 10: Roll the generator off the pallet and onto a solid, flat surface.



Step 11: Remove the battery cover plate using the wrench from the toolkit.



Step 12: Locate the free end of the negative battery cable above and behind the battery. Connect end to the battery.



Step 13: Replace the battery cover.



Step 14: Add 50.7 fl. oz of 10W-30 oil to the generator.



Note: The following set of instructions are a list of simplified steps to operate your generator. These steps are covered in greater detail within the product manual along with safety warnings, guidelines for maintaining your generator, and details about your generator's warranty.

We strongly recommend after assembling your generator you read the entire product manual to ensure you understand how to operate your generator properly and safely.