




Description	<ul style="list-style-type: none">* Ability to carry out the termination of compact optical cables through connectorization in the field;* Anchoring cables with versatile retention system that allows compatibility with drop cables.
Application	<ul style="list-style-type: none">• FTTH networks (FTTH, FTTD)• Enterprise/Access networks• LAN/WAN
Advantaged	<ul style="list-style-type: none">• Compact dimension;• Easy handling;• Fixing to the wall by screw or double-sided tape;• Can be installed on any flat vertical surface; Symmetrical cover that allows fitting on both sides;• Compatibility with:<ul style="list-style-type: none">• Fit to cable 2x1.6mm, 3x2mm and circular 3mm drop cables; 0.9mm diameter fiber for Invisilight applications.
Installation Environment	<ul style="list-style-type: none">• Internal.
Operating Environment	<ul style="list-style-type: none">• Internal.
Temperature Storage (°C)	<ul style="list-style-type: none">• -25~+75°C
Temperature Operation(°C)	<ul style="list-style-type: none">• -25~+75°C
Temperature Operation(°C)	<ul style="list-style-type: none">• UL94-V2
Outline Dimension (LxWxH)	<ul style="list-style-type: none">• -94X25X19
Color	<ul style="list-style-type: none">• White or Black
Cable Type	<ul style="list-style-type: none">• Cabo Micro Indoor Low Friction - 2mm x 1,6mm;• Cabo Drop Low Friction - 3mm x 2mm;• Cabo Drop Fast Compacto - 3mm x 2mm; Cabo Drop• Circular 3mm.

Maximum Input	Maximum diameter of the input cable (mm) is 3.0mm
Maximum Output	Output cable diameter (mm) is 3.0mm
Adapter Port	SC/APC Adapter <ul style="list-style-type: none">• Simplex without shutter• Simplex with shutter
Material	PC+ABS
IP Rate	IP30
IK Rate	IK09

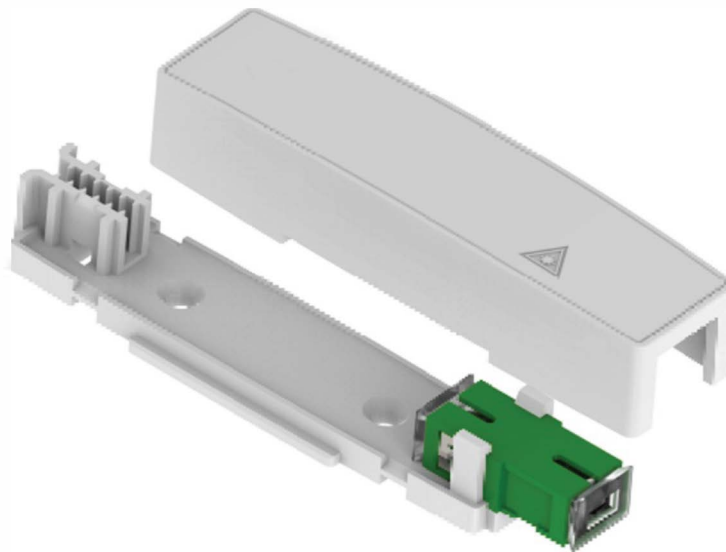

SlimFIT Compact

Customer Connection Point

