




# L80 SERIES

## MECHANICAL KEYBOARDS

User Guide  
使用说明书

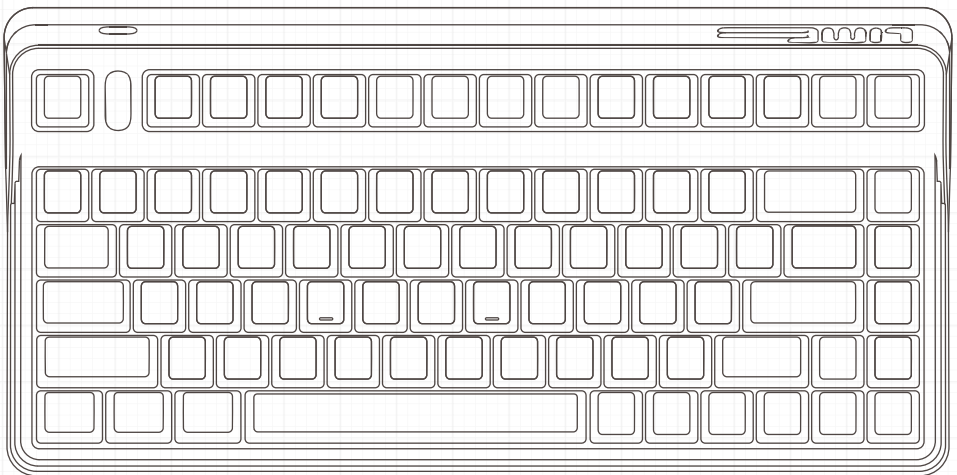

New Design  
New Series

Designed by IQUNIX




# English Version

Start Reading →

Please read this manual guide and cautions to ensure that using this product correctly.

## Details

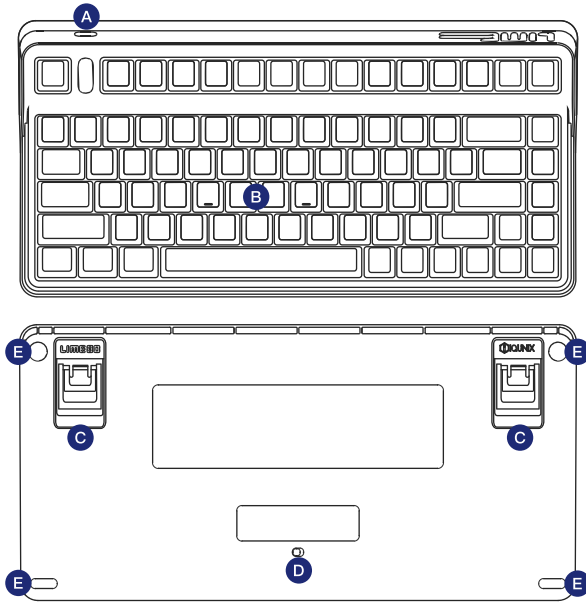

- A Type-C Port    B Indicator    C Feet  
D Mode Switch    E Silicone Pads

## Product Specification

**Product Name:** LIME 80

**Keyboard Type:** Mechanical Keyboard

**Key Quantity:** 83 Keys

**Keyboard Material:** ABS Case + PBT Keycaps

**Character Technology:** Dye Sublimation

**Large Key Structure:** Costar Stabilizers

**Rating:** 5V=1A

**Connect Interface:** USB Type-C

**Cable Length:** 180cm

**Dimensions:** 325\*162\*45mm


**Origin:** Shenzhen, China

**Web:** [www.IQUNIX.store](http://www.IQUNIX.store)


**Support E-mail:** [support@iqunix.store](mailto:support@iqunix.store)

# Three Ways of Connecting Devices

## Bluetooth Connection Mode

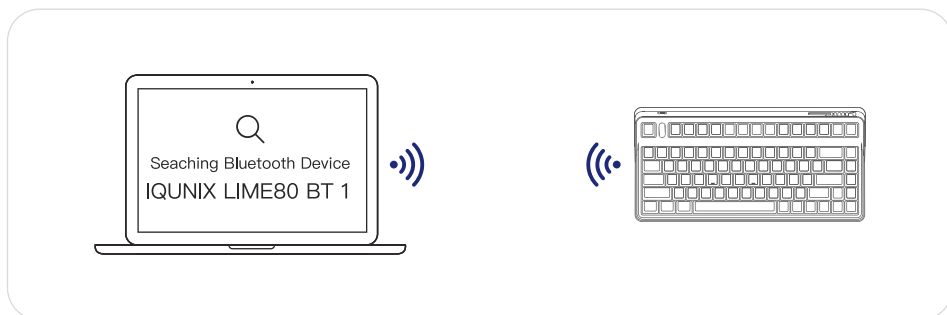

1 Toggle the keyboard Mode Switch to wireless side 

2 Press FN+1, then hold FN+1 for 5 seconds if the indicator blinks in blue light.  
(Bluetooth matching mode on when blue light blinks.) 


3 Enable Bluetooth matching (Computer / Phone / Tablet)



4 Select the matching device **【IQUNIX LIME80 BT 1】**

5 Indicator light turning off when matching successfully.


**!** If you need to connect a new device, please hold FN+1 for 5 seconds to remove the previous device. When the LED indicator blinks blue light, you can connect your device following the Step 3.

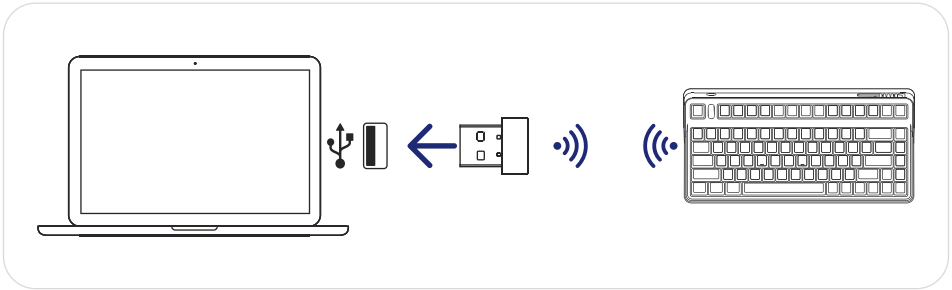
## 2.4GHz Connection Mode



- 1 Toggle the keyboard Mode Switch to wireless side. 
- 2 Plug the 2.4GHz receiver into your computer.
- 3 Press FN+4 to enter 2.4GHz matching mode   
(2.4GHz matching mode on when pink light blinks.)
- 4 Indicator light turning off means successful matching.


## Wired Connection Mode

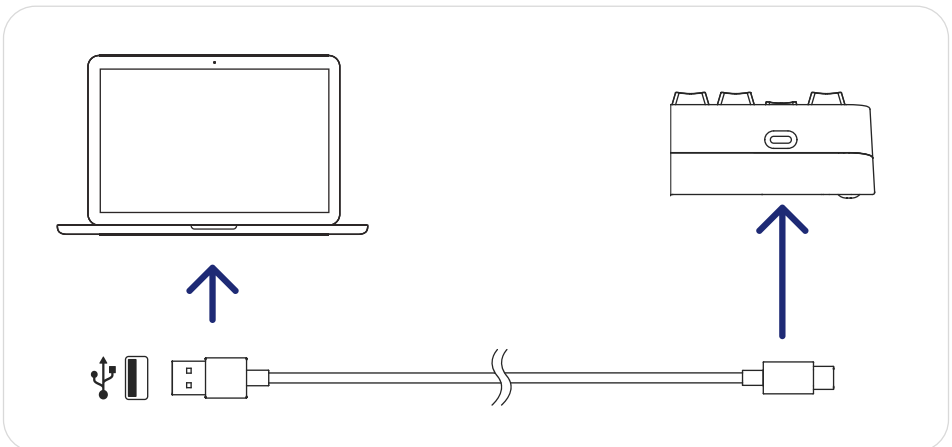

- 1 For Wireless Version, toggle the keyboard Mode Switch to wired side. 
- 2 Plug the USB cable into your device.



# Function Keys Combinations

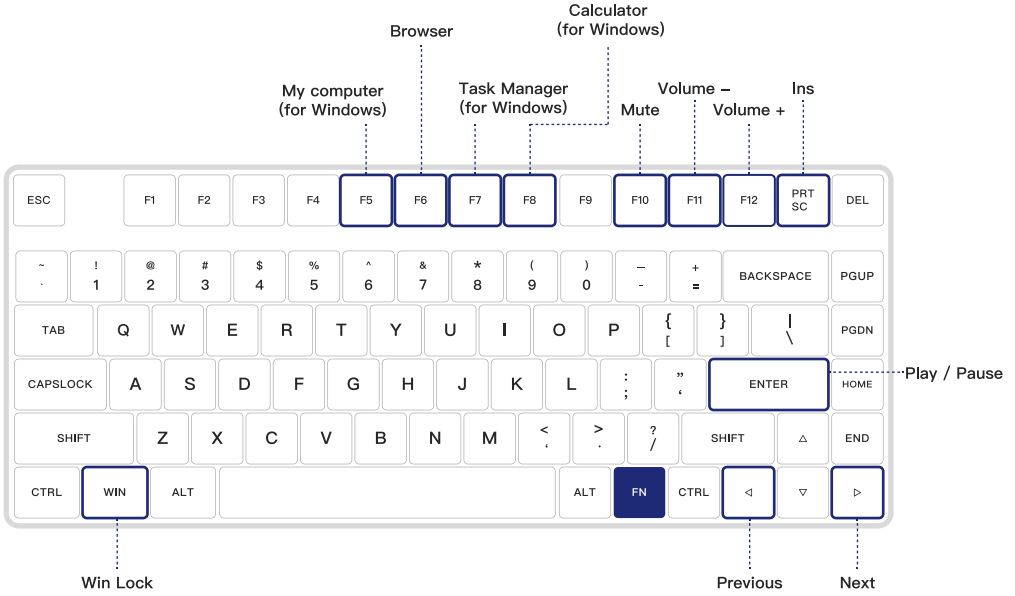


# LED Indicator Keys Combinations (RGB Version)



FN

# Special Keys Combinations (Hold for 5 Seconds)

Mac / Windows Layout Switching

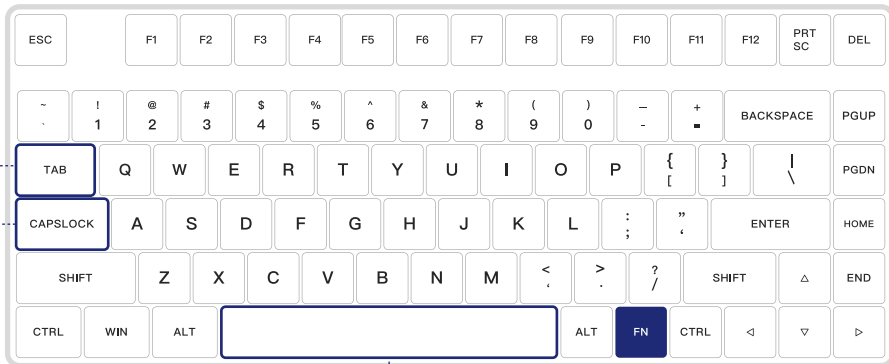

Swap CapsLock and Left Ctrl


Reset to Default

FN

# Special Keys Combinations (Wireless Mode)

Switch to  
Bluetooth Mode

Switch to  
2.4GHz Mode

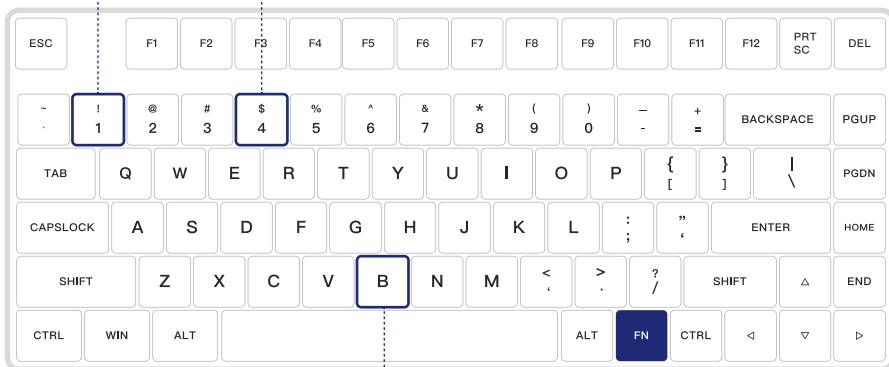

## Battery Level Check

The LED Indicator blinks 1, 2, 3,...10 times,  
which stands for 10%, 20%, 30%,...100% battery level.



# LED Indicator Status Description



## Device Charging and Battery Status

|   |  |  |  |
|---|--|--|--|
| <br>Yellow Light<br>Blinking | <br>Green Light<br>Blinking 3 Times | <br>Green Light<br>On | <br>Red Light<br>Blinking |
| Charging  | Charging Completed<br>(Wired Mode)   | Charging Completed<br>(Wireless Mode)  | Less than 10%<br>(Wireless Mode)   |


## Bluetooth Device Matching

|   |  |
|---|--|
| <br>Blue Light<br>Blinking | <br>Turquoise Light<br>Blinking |
| Bluetooth Matching on   | Bluetooth Device<br>Re-Connection  |

## Special Status

|  |  |
|--|--|
| <br>White Light<br>Blinking 5 Times | <br>White Light<br>On |
| Reset to Default   | CapsLock On  |

## 2.4GHz Mode


|   |
|---|
| <br>Pink Light<br>Blinking |
| Enter 2.4GHz Mode   |



# Mac / Windows Layout Switch




Hold for 5 seconds to switch the layout between macOS and windows systems.

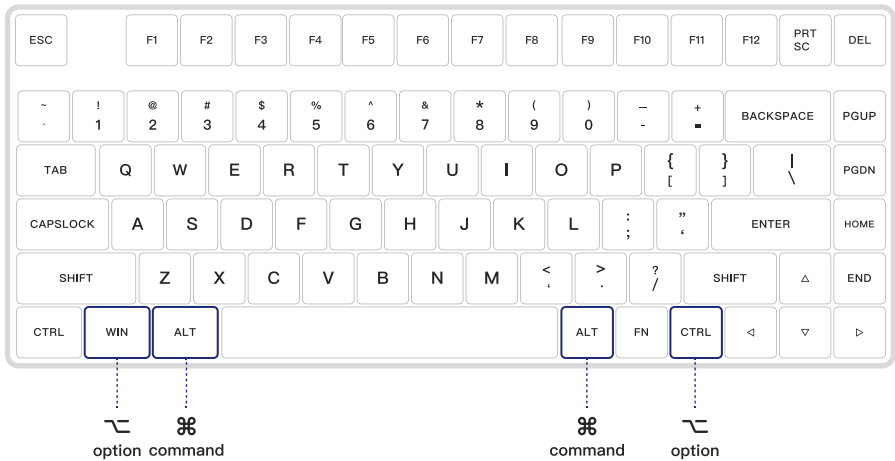

To learn more details, please reach out to us on official website or social media.  
Official website: [www.IQUNIX.store](http://www.IQUNIX.store)

Follow us:  
@ IQUNIX



Download IQUNIX  
Official App




# 简体中文版

开始阅读使用 →

使用前请仔细阅读此说明书和注意事项  
以保证您能正确的使用此产品

## 自产品细节

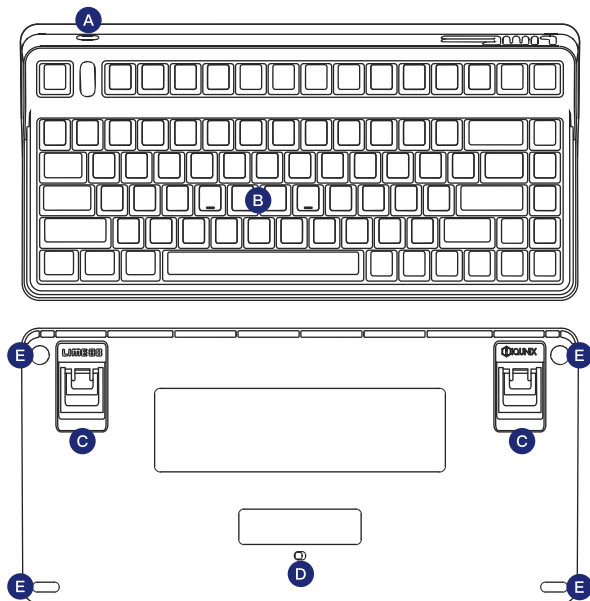

- A Type-C接口    B 指示灯    C 脚撑  
D 切换模式开关    E 硅胶垫

## 基本参数

产品名称: L80 机械键盘

键盘类型: 机械键盘

按键数量: 83

键盘材质: ABS外壳+PBT键帽

字符工艺: 热升华

大键结构: 平衡杆

额定输入: 5V=1A

接口类型: USB Type-C

数据线长: 180cm

产品尺寸: 325\*162\*45mm

产地: 中国深圳






官网: [www.iQunix.com](http://www.iQunix.com)

邮箱: [Hello@iQunix.com](mailto:Hello@iQunix.com)


# 选择连接方式





## 蓝牙模式

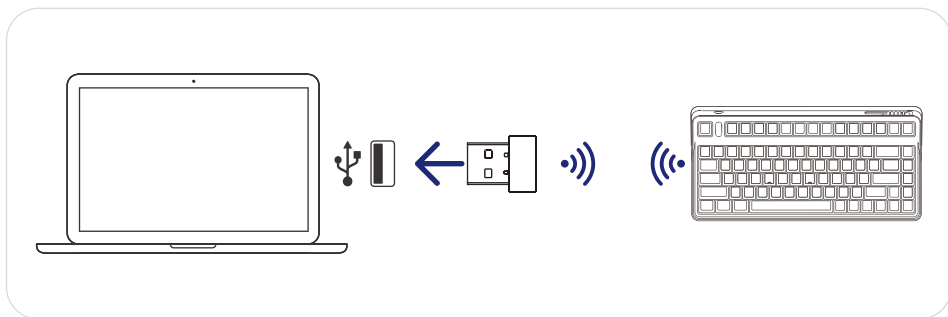


- 1 将键盘底部开关拨至“无线模式”   
  - 2 短按FN+1，指示灯开始闪烁青色灯光后，长按Fn+1（长按5秒钟）  +   
(指示灯开始闪烁蓝色灯光时，键盘成功进入蓝牙匹配模式。)
  - 3 打开设备（电脑、手机、平板）的蓝牙搜索界面；
  - 4 在设备的蓝牙搜索列表中选择 **【IQUNIX LIME80 BT 1】**；
  - 5 灯光熄灭，匹配成功，开始使用您的键盘。
- !** 如果需要连接新设备，需要FN+1（长按5秒钟）清除已连接的上一台设备。  
待指示灯开始闪烁蓝色灯光时，即可从第三步开始进行连接。



## 2.4G模式



- 1 将键盘底部开关拨至“无线模式”  
- 2 将2.4G接收器接入您的电脑；
- 3 短按FN+4，进入2.4G匹配模式  +   
(指示灯开始闪烁粉色灯光时，键盘成功进入2.4G匹配模式)
- 4 灯光熄灭，匹配成功，开始使用您的键盘。
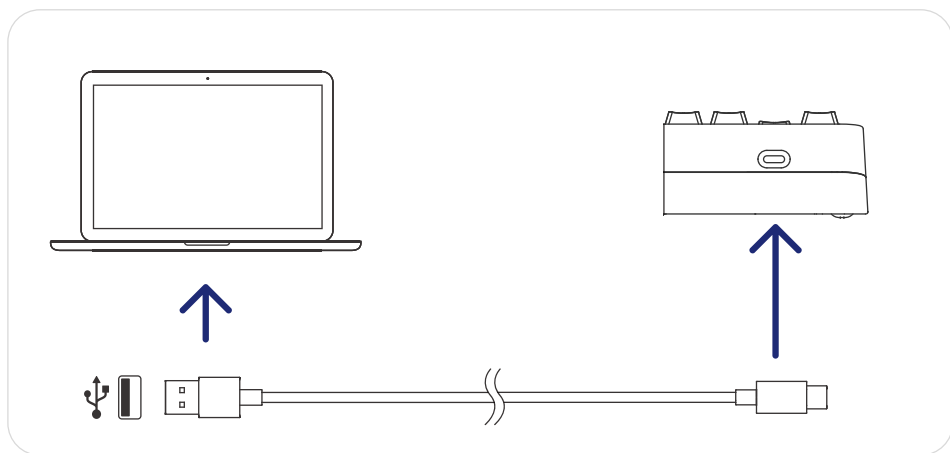
## 有线模式




- 1 将键盘底部开关拨至“有线模式”  
- 2 将数据线USB-A端接入电脑（有线版从此步开始）；
- 3 将数据线USB-C端接入键盘；
- 4 开始使用您的键盘。

## FN 多媒体功能组合键



## FN 灯光组合键 (RGB版本)

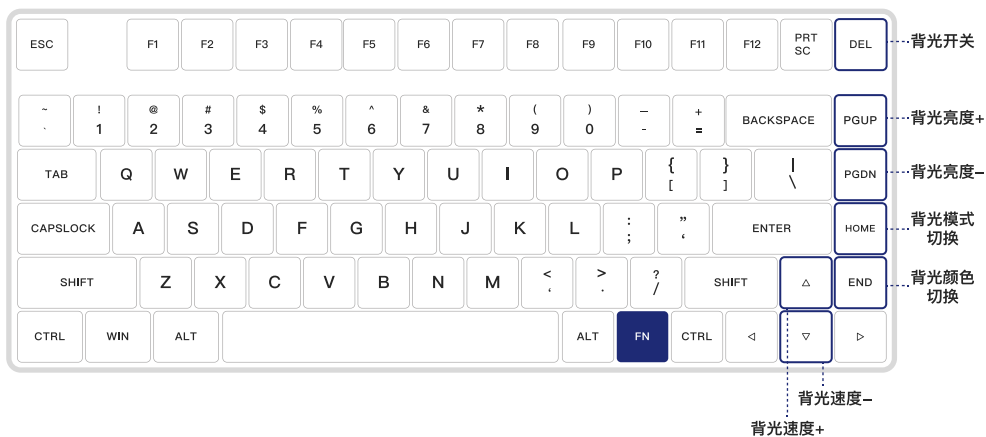

# FN 特殊组合键 (长按5秒实现)

切换Mac、Windows  
系统键位布局




CapsLock和  
左Ctrl互换位置

恢复出厂设置

## 无线模式 FN 特殊组合键

切换蓝牙模式

切换2.4G模式

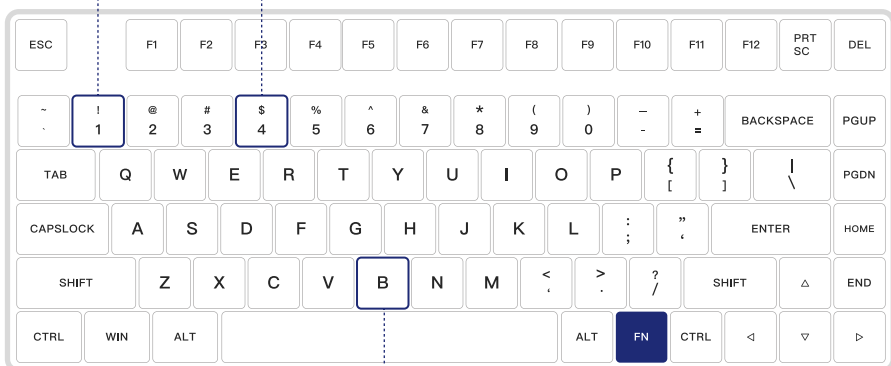

查看电量

指示灯闪烁1、2、3、...、10次对分别对应  
电池10%、20%、30%、...、100%电量



# ☀ 指示灯颜色和状态说明

## 关于设备充电

|   |   |   |   |
|---|---|---|---|
|  |  |  |  |
| 黄色灯光闪烁  | 绿色灯光闪烁3次  | 绿色灯光长亮  | 红色灯光闪烁  |
| 充电中   | 充电完成(有线模式)  | 充电完成(无线模式)  | 电量低于10%(无线模式)   |

## 关于蓝牙匹配

|   |   |
|---|---|
|  |  |
| 蓝色灯光闪烁  | 设备1: 青色灯光闪烁   |
| 蓝牙匹配开启  | 蓝牙设备回连  |

## 关于特殊情况

|   |   |
|---|---|
|  |  |
| 白色灯光闪烁5次  | 白色灯光长亮  |
| 恢复出厂设置  | Caps Lock开启   |

## 关于2.4G模式


|   |
|---|
|  |
| 粉色灯光闪烁  |
| 进入2.4G模式  |



# 切换为MAC布局对应的按键



长按5秒即可切换Mac、Windows系统键位布局

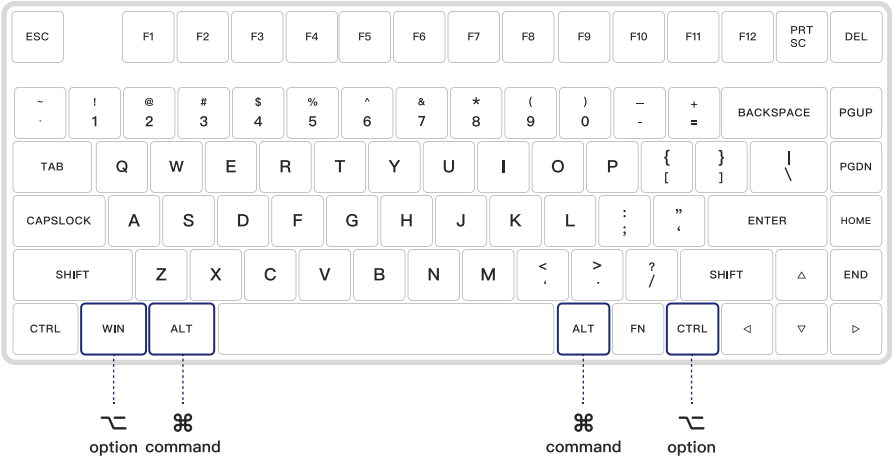

了解更多详细信息请关注

官方微信公众号或下载IQUNIX APP



官方微信公众号



官方APP





品牌/Brand:

**IQUNIX**

产地/Origin:

**中国**

**China**

制造商/Manufacturer:

**深圳市银色风暴科技有限公司**

**Shenzhen Silver Storm Technology Co., Ltd.**

服务热线/Service Telephone:

**400-1788-905**