

T6130- Internet of Things to Modbus Devices

- Automatic ThingWorx (PTC) connectivity
- Interfaces to Modbus devices - meters, controllers
- Extremely easy system installation
- Add to existing **ThingWorx ecosystem**
- Informative example of naming convention with device model and definition
- Ability for the user to choose registers for mapping and save as template
- Easy browser setup (built-in web server)
- Standard RS485 three wire connection
- Simultaneous session access to Modbus data, Web page and configuration
- Modbus Template creator tool makes template creation a breeze, sample templates included


PRODUCT INFORMATION

The “E+ series” enables innovative applications together with existing Automation Systems so you can offer solutions which save money and improve reliability.

Modbus Device data exposed to ThingWorx can include any desired device parameters. But typically includes a flow, total, an average and various quality measures. Typical measures are prenamed in dropdown menus.

In addition to available meter templates which can be selected using the Modbus Template creator setup procedure using a drop down menu, the user can create a new template at a moment’s notice and then load it to T6130. It is a mapping free and well modeled template product. Create templates with the tool—load them into the device.

• Devices Configuration	Baud rate	9600	The baud rate of serial port. (Default=9600)
• BACnet Objects Status	Serial Mode	8-N-1	Default mode: 8-N-1 (8 data bits, No parity, 1 stop bit)
• Change Password	Common settings		
• Statistics	Parameter	Value	Description
• Reset Configuration	Polling Delay	5	Idle time(in sec) between the end of one poll and the start of the next. Default:30 sec. Range: (5-3600). The Polling Delay is actual only for devices with "Polling" parameter set to "Periodically"
• Activate Configuration	Device 1 Configuration		
	IP	192.168.0.51	IP Address used by the Modbus/TCP device. Empty IP means Modbus/RTU
	Modbus ID	1	Address of remote device connected on a serial line. Valid range: 1-247 for Modbus/RTU or Modbus/TCP router. Empty(or 0) for Modbus/TCP device.
	Polling	<input checked="" type="checkbox"/> Periodically <input type="checkbox"/> On demand	How to update values: On demand (by user) or Periodically(using Polling Delay)
	Description	Spirax Sarco test meter	Device description (up to 63 characters)
	Device Model		Current template: Spirax Sarco

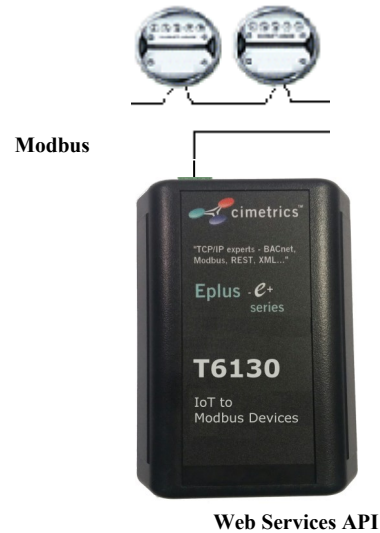

THINGWORX DETAILS

Wide variety of casts to numeric ThingWorx properties. Well-named defaults, descriptions and units.

INTERFACE SPECIFICATIONS

Adapter Input Voltage..... 105 to 117 VAC @ 10W
 Input Voltage..... 9 VDC @ 1A
 Operating Temperature..... 7 to 40° C
 Dimensions..... 5.0 x 5.9 x 1.2 inches
 Connections..... Ethernet RJ45, modular screw terminal, DC power

PRODUCT SUPPORT

One year parts, labor, and technical installation support (via telephone or email)

ORDERING INFORMATION

T6130 - Internet of Things to Modbus Devices
 T6099 - wall bracket kit
 T6131 - Internet of Things to Modbus Devices module (Xport, Xpico)



Specifications are subject to change without notice. ThingWorx is a registered trademark of PTC. No endorsement of this system by any organization is implied. All other brand names and product names are trademarks of Cimetrics, Inc. Copyright © 2015 Cimetrics, Inc. All rights reserved.