
www.jasonl.com.au

Need help! Call us on **1300 527 665**



Size: 1800mm

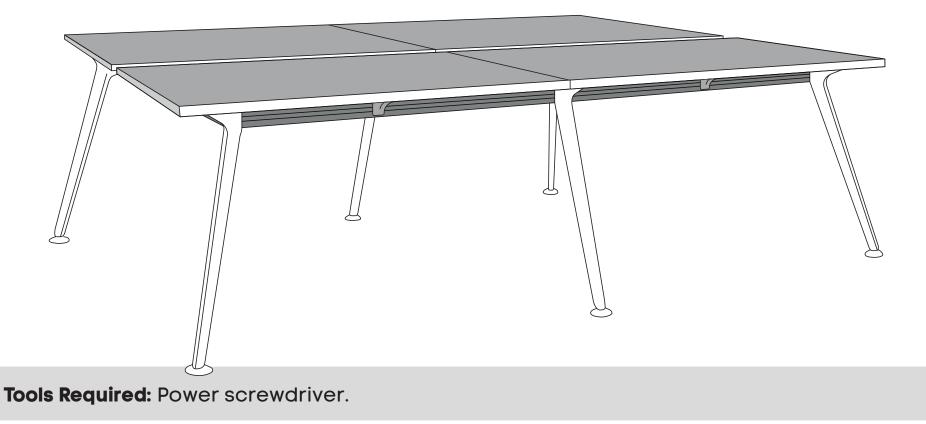

Special Note: No pre-drilled holes or nut inserts are provided.


Wood screws will be required to be drilled directly into underside of desk top.

Size: 1800mm

www.jasonl.com.au

Need help! Call us on **1300 527 665**



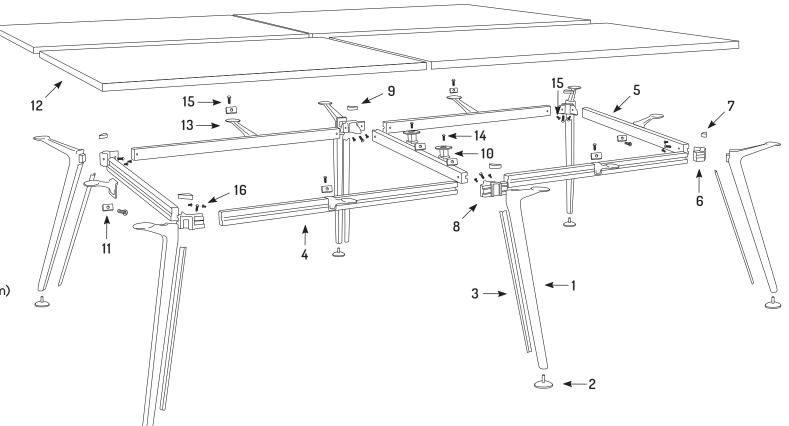

COMPONENTS


1 Leg x6

- 2 Adjustable Foot x6
- 3 Leg Cable Cover x6
- 4 Rail Lengths x4 (1520mm)
- 5 Rail Widths x3 (620mm)
- 6 2 Way Connector x4
- 7 2 Way Connector Cap x4
- 8 3 Way Connector x2
- 9 3 Way Connector Cap x2
- 10 Rail Space Bracket x2
- 11 Slot Nut x8
- 12 Table Top x4 (1800mm x 800mm)
- 13 Support Connector x6


SCREWS

- 14 M8x20mm Dome Head x2
- 15 M8x12mm Dome Head x20
- 16 M8x20mm Cap Head x6
- 17 M5x20mm Self Tapping x26

Size: 1800mm

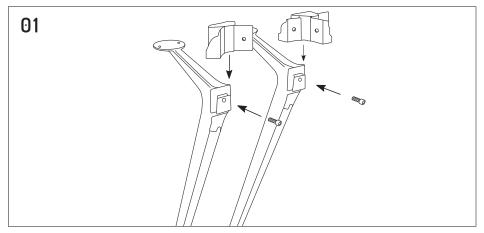


Slide the 2 way and 3 way connectors over each leg, and securely lock into place using M8x20mm cap head bolts.

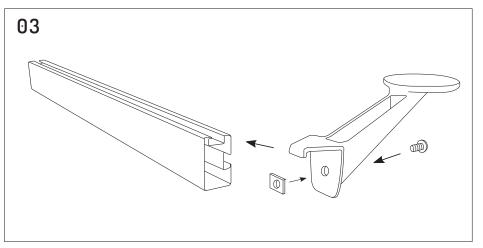


Loosely connect the shorter M8x12mm dome head bolt and slot nut through the metal rail spacer bracket. Slide onto required rails and fully tighten in place.



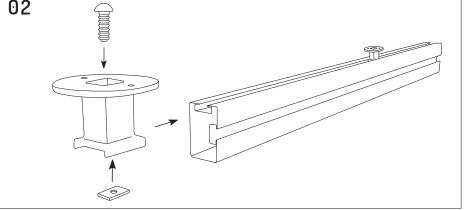

Loosely connect the longer M8x20mm dome head bolt and slot nut through the rail spacer bracket. Slide onto required rails and fully tighten in place.

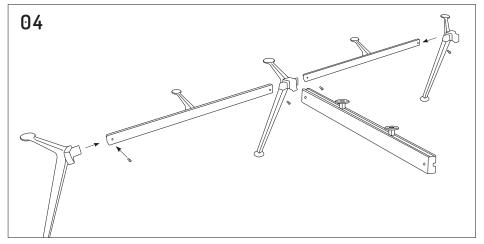


Securely connect legs to rails lenghts using the shorter M8x20mm dome head bolts.


www.jasonl.com.au Need help! Call us on 1300 527 665




Size: 1800mm

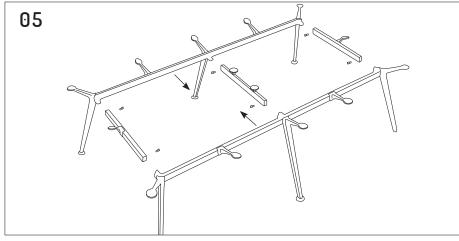

Securely connect legs to rails widths using the shorter M8x12mm dome head bolts.

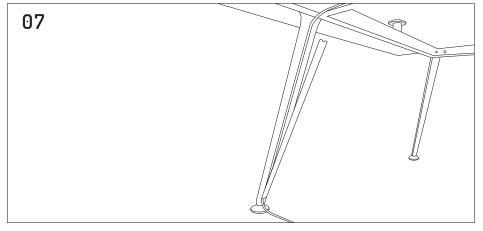

Cancel any power box cable using the magnetic leg cable covers.

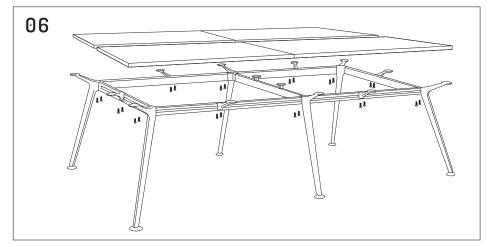

Ensure the work surfaces are centered over the frame. Fully tighten all M5x20mm self tapping screws through each leg rail spacer and support connector bracket into the work surfaces.

