



Low Intensity UV Curing Light Fixture with Adjustable Base (SKU # 302012)

OPERATION:

1. Plug into any 110-125V (single phase) outlet.
2. Depress one or both switches to turn on two or four lamps.
3. Slotted holes are provided for wall mounting. Space the two provided #6 screws, 5 inches apart to mount. Screw-in wall anchors are also provided for dry wall mounting.
4. Side knobs can be loosened for 360 degree rotation of light unit within the bracket or tightened to lock in position.


MAINTENANCE:

WARNING: To avoid electric shock, unplug light from outlet before attempting to perform any maintenance.

CLEANING: Remove dirt and grime as soon as it accumulates on light body and cord by using a soft, damp cloth (a mild soap may be used if needed), being careful not to wet the electrical plug. **Never immerse** any part of the unit in any solution to clean it. **Do not use solvents** such as: gasoline, turpentine, etc. to clean it.

RELAMPING: Remove the two screws "A" located at the top of the unit as shown. Tilt clear lens "B" forward and pull upward to remove. The burned out lamp(s) can then be removed by tilting slightly forward and pulling straight up. A gentle side to side action on the lamp can aid in removal or replacement. Replace with SKU # 192044.

Return lens to original position in the reverse manner that it was removed.

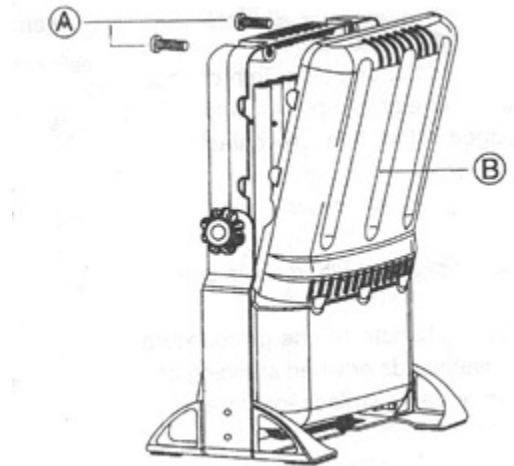



REPLACEMENT LAMP(S):

- Low Intensity UV Curing Lamp: **SKU # 192044**

ELECTRICAL RATING:

- Maximum total rating - 52 WATTS, 0.682 AMP, 120 VOLTS, 60Hz