

Fail-safe direct starter, 3RM1, 500 V, 0.09 - 0.75 kW, 0.4 - 2 A, 110-230 V AC, spring-type terminals



|                          |  |
|--------------------------|--|
| Product brand name       | SIRIUS   |
| Product category         | Motor starter  |
| Product designation      | Fail-safe direct starter   |
| Design of the product    | With electronic overload protection and safety-related disconnection |
| Product type designation | 3RM1   |

| General technical data  |           |
|---|-----------|
| Trip class  | CLASS 10A |
| Product function  |           |
| • Intrinsic device protection   | Yes       |
| Suitability for operation Device connector 3ZY12                                    | No        |
| Power loss [W] for rated value of the current at AC in hot operating state per pole | 0.1 W     |
| Insulation voltage  |           |
| • rated value   | 500 V     |
| Surge voltage resistance rated value  | 6 kV      |
| maximum permissible voltage for safe isolation                                      |           |
| • between main and auxiliary circuit  | 500 V     |
| • between control and auxiliary circuit   | 250 V     |

|   |   |
|---|---|
| Protection class IP   | IP20  |
| Shock resistance  | 6g / 11 ms                                      |
| Vibration resistance  | 1 ... 6 Hz, 15 mm; 20 m/s <sup>2</sup> , 500 Hz |
| Operating frequency maximum   | 1 1/s   |
| Mechanical service life (switching cycles) <ul style="list-style-type: none"> <li>• typical</li> </ul>        | 30 000 000                                      |
| Reference code acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750                              | Q   |
| Reference code acc. to DIN EN 81346-2   | Q   |
| Reference code acc. to DIN EN 61346-2   | Q   |
| Product function <ul style="list-style-type: none"> <li>• direct start</li> <li>• reverse starting</li> </ul> | Yes<br>No                                       |
| Product function Short circuit protection   | No  |

### Electromagnetic compatibility

|  |  |
|--|--|
| Conducted interference <ul style="list-style-type: none"> <li>• due to burst acc. to IEC 61000-4-4</li> <li>• due to conductor-earth surge acc. to IEC 61000-4-5</li> <li>• due to conductor-conductor surge acc. to IEC 61000-4-5</li> <li>• due to high-frequency radiation acc. to IEC 61000-4-6</li> </ul> | 3 kV / 5 kHz<br>4 kV signal lines 2 kV<br>2 kV<br>10 V   |
| Electrostatic discharge acc. to IEC 61000-4-2  | 6 kV contact discharge / 8 kV air discharge  |
| Conducted HF-interference emissions acc. to CISPR11  | Class B for domestic, business and commercial environments;<br>Class A for industrial environments at 110 V DC |
| Field-bound HF-interference emission acc. to CISPR11   | Class B for domestic, business and commercial environments;<br>Class A for industrial environments at 110 V DC |

### Safety related data

|   |                     |
|---|---------------------|
| Safety device type acc. to IEC 61508-2  | Type B              |
| Safety Integrity Level (SIL) acc. to IEC 61508  | 3                   |
| Performance level (PL) acc. to EN ISO 13849-1   | e                   |
| Category acc. to EN ISO 13849-1   | 4                   |
| Stop category acc. to DIN EN 60204-1  | 0                   |
| Safe failure fraction (SFF)   | 99.4 %              |
| Average diagnostic coverage level (DCavg)   | 99 %                |
| Diagnostics test interval by internal test function maximum   | 600 s               |
| Function test interval maximum  | 1 y                 |
| Failure rate [FIT] <ul style="list-style-type: none"> <li>• at rate of recognizable hazardous failures (<math>\lambda_{dd}</math>)</li> <li>• at rate of non-recognizable hazardous failures (<math>\lambda_{du}</math>)</li> </ul> | 1 400 FIT<br>16 FIT |

|   |                   |
|---|-------------------|
| PFHD with high demand rate acc. to EN 62061   | 0.00000002 1/h    |
| PFDavg with low demand rate acc. to IEC 61508                                       | 0.000018          |
| MTTFd   | 75 y              |
| Hardware fault tolerance acc. to IEC 61508  | 1                 |
| T1 value for proof test interval or service life acc. to IEC 61508                  | 20 y              |
| Safe state  | Load circuit open |
| Protection against electrical shock   | finger-safe       |
| Off-delay time with safety-related request  |                   |
| • when switched off via control inputs maximum                                      | 90 ms             |
| • when switched off via supply voltage maximum                                      | 120 ms            |
| Hardware fault tolerance acc. to IEC 61508 relating to ATEX                         | 0                 |
| PFDavg with low demand rate acc. to IEC 61508 relating to ATEX                      | 0.0005            |
| PFHD with high demand rate acc. to EN 62061 relating to ATEX                        | 0.00000005 1/h    |
| Safety Integrity Level (SIL) acc. to IEC 61508 relating to ATEX                     | SIL2              |
| T1 value for proof test interval or service life acc. to IEC 61508 relating to ATEX | 3 y               |

#### Main circuit

|  |                  |
|--|------------------|
| Number of poles for main current circuit                                   | 3                |
| Adjustable pick-up value current of the current-dependent overload release | 0.4 ... 2 A      |
| Minimum load [%]   | 20 %             |
| Type of the motor protection   | solid-state      |
| Operating voltage  |                  |
| • rated value  | 48 ... 500 V     |
| Relative symmetrical tolerance of the operating voltage                    | 10 %             |
| Operating frequency 1 rated value  | 50 Hz            |
| Operating frequency 2 rated value  | 60 Hz            |
| Relative symmetrical tolerance of the operating frequency                  | 10 %             |
| Operating current  |                  |
| • at AC at 400 V rated value   | 2 A              |
| • at AC-53a at 400 V at ambient temperature 40 °C rated value              | 2 A              |
| Ampacity when starting maximum   | 16 A             |
| Operating power for three-phase motors at 400 V at 50 Hz                   | 0.09 ... 0.75 kW |

#### Inputs/ Outputs

|                                |  |
|--------------------------------|--|
| Input voltage at digital input |  |
|--------------------------------|--|

|  |                                     |
|--|-------------------------------------|
| <ul style="list-style-type: none"> <li>• at DC rated value</li> <li>• with signal &lt;0&gt; at DC</li> <li>• for signal &lt;1&gt; at DC</li> </ul>                                       | 110 V<br>0 ... 40 V<br>79 ... 121   |
| <b>Input voltage at digital input</b> <ul style="list-style-type: none"> <li>• at AC rated value</li> <li>• with signal &lt;0&gt; at AC</li> <li>• for signal &lt;1&gt; at AC</li> </ul> | 110 V<br>0 ... 40 V<br>93 ... 253 V |
| <b>Input current at digital input</b> <ul style="list-style-type: none"> <li>• with signal &lt;0&gt; typical</li> <li>• for signal &lt;1&gt; typical</li> </ul>                          | 0.0004 A<br>0.002 A                 |
| <b>Input current at digital input</b> <ul style="list-style-type: none"> <li>• for signal &lt;1&gt; at DC</li> <li>• with signal &lt;0&gt; at DC</li> </ul>                              | 1.5 mA<br>0.25 mA                   |
| <b>Input current at digital input with signal &lt;0&gt; at AC</b> <ul style="list-style-type: none"> <li>• at 110 V</li> <li>• at 230 V</li> </ul>                                       | 0.2 mA<br>0.4 mA                    |
| <b>Input current at digital input for signal &lt;1&gt; at AC</b> <ul style="list-style-type: none"> <li>• at 110 V</li> <li>• at 230 V</li> </ul>  | 1.1 mA<br>2.3 mA                    |
| Number of CO contacts for auxiliary contacts   | 1                                   |
| <b>Operating current of auxiliary contacts at AC-15 at 230 V maximum</b>   | 3 A                                 |
| <b>Operating current of auxiliary contacts at DC-13 at 24 V maximum</b>  | 1 A                                 |

#### Control circuit/ Control

|   |                                |
|---|--------------------------------|
| <b>Type of voltage of the control supply voltage</b>  | AC/DC                          |
| <b>Control supply voltage 1 at AC</b> <ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>  | 110 ... 230 V<br>110 ... 230 V |
| <b>Control supply voltage frequency</b> <ul style="list-style-type: none"> <li>• 1 rated value</li> <li>• 2 rated value</li> </ul>  | 50 Hz<br>60 Hz                 |
| <b>Control supply voltage 1</b> <ul style="list-style-type: none"> <li>• at DC rated value</li> </ul>   | 110 V                          |
| <b>Operating range factor control supply voltage rated value at DC</b> <ul style="list-style-type: none"> <li>• initial value</li> <li>• Full-scale value</li> </ul>          | 0.85<br>1.1                    |
| <b>Operating range factor control supply voltage rated value at AC at 50 Hz</b> <ul style="list-style-type: none"> <li>• initial value</li> <li>• Full-scale value</li> </ul> | 0.85<br>1.1                    |

|   |       |
|---|-------|
| <b>Operating range factor control supply voltage rated value at AC at 60 Hz</b> |       |
| • initial value   | 1.1   |
| • Full-scale value  | 0.85  |
| <b>Control current at AC</b>  |       |
| • at 110 V in standby mode  | 8 mA  |
| • at 230 V in standby mode  | 6 mA  |
| • at 110 V when switching on  | 40 mA |
| • at 230 V when switching on  | 25 mA |
| • at 110 V during operation   | 25 mA |
| • at 230 V during operation   | 14 mA |
| <b>Control current at DC</b>  |       |
| • in standby mode   | 4 mA  |
| • when switching on   | 13 mA |
| • during operation  | 30 mA |

|                             |               |
|-----------------------------|---------------|
| <b>Response times</b>       |               |
| <b>Switch-on delay time</b> | 90 ... 120 ms |
| <b>Off-delay time</b>       | 60 ... 90 ms  |

|   |  |
|---|--|
| <b>Installation/ mounting/ dimensions</b> |  |
| <b>Mounting position</b>                  | vertical, horizontal, standing (observe derating)            |
| <b>Mounting type</b>                      | screw and snap-on mounting onto 35 mm standard mounting rail |
| <b>Height</b>                             | 100 mm   |
| <b>Width</b>                              | 22.5 mm  |
| <b>Depth</b>                              | 141.6 mm   |
| <b>Required spacing</b>                   |  |
| • with side-by-side mounting              |  |
| — forwards                                | 0 mm   |
| — Backwards                               | 0 mm   |
| — upwards                                 | 50 mm  |
| — downwards                               | 50 mm  |
| — at the side                             | 0 mm   |
| • for grounded parts                      |  |
| — forwards                                | 0 mm   |
| — Backwards                               | 0 mm   |
| — upwards                                 | 50 mm  |
| — at the side                             | 3.5 mm   |
| — downwards                               | 50 mm  |

|  |         |
|--|---------|
| <b>Ambient conditions</b>                              |         |
| <b>Installation altitude at height above sea level</b> |         |
| • maximum  | 2 000 m |
| <b>Ambient temperature</b>                             |         |

|  |                   |
|--|-------------------|
| <ul style="list-style-type: none"> <li>during operation</li> <li>during storage</li> <li>during transport</li> </ul> | -25 ... +60 °C    |
| Relative humidity during operation   | -40 ... +70 °C    |
| Air pressure   | -40 ... +70 °C    |
| <ul style="list-style-type: none"> <li>acc. to SN 31205</li> </ul>   | 10 ... 95 %       |
|  | 900 ... 1 060 hPa |

### Communication/ Protocol

|   |    |
|---|----|
| <b>Product function Bus communication</b> | No |
|---|----|

### Connections/ Terminals

|  |  |
|--|--|
| <b>Type of electrical connection</b> <ul style="list-style-type: none"> <li>for main current circuit</li> <li>for auxiliary and control current circuit</li> </ul>   | PUSH-IN connection (spring-loaded connection) for main circuit, spring-loaded terminals (push-in) for control circuit<br>PUSH-IN connection (spring-loaded connection) spring-loaded terminals (push-in)   |
| <b>Type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>for main contacts               <ul style="list-style-type: none"> <li>— solid</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>at AWG conductors for main contacts</li> </ul>           | 1x (0.5 ... 4 mm <sup>2</sup> )<br>1x (0.5 ... 2.5 mm <sup>2</sup> )<br>1x (0.5 ... 4 mm <sup>2</sup> )<br>1x (20 ... 12)  |
| <b>Connectable conductor cross-section for main contacts</b> <ul style="list-style-type: none"> <li>single or multi-stranded</li> <li>finely stranded with core end processing</li> <li>finely stranded without core end processing</li> </ul>   | 0.5 ... 4 mm <sup>2</sup><br>0.5 ... 2.5 mm <sup>2</sup><br>0.5 ... 4 mm <sup>2</sup>  |
| <b>Connectable conductor cross-section for auxiliary contacts</b> <ul style="list-style-type: none"> <li>single or multi-stranded</li> <li>finely stranded with core end processing</li> <li>finely stranded without core end processing</li> </ul>  | 0.5 ... 1.5 mm <sup>2</sup><br>0.5 ... 1 mm <sup>2</sup><br>0.5 ... 1.5 mm <sup>2</sup>  |
| <b>Type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>for auxiliary contacts               <ul style="list-style-type: none"> <li>— solid</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>at AWG conductors for auxiliary contacts</li> </ul> | 1x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )<br>1x (0,5 ... 1,0 mm <sup>2</sup> ), 2x (0,5 ... 1,0 mm <sup>2</sup> )<br>1x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.5 ... 1.5 mm <sup>2</sup> )<br>1x (20 ... 16), 2x (20 ... 16) |
| <b>AWG number as coded connectable conductor cross section</b> <ul style="list-style-type: none"> <li>for main contacts</li> <li>for auxiliary contacts</li> </ul>   | 20 ... 12<br>20 ... 16   |

### UL/CSA ratings

### Yielded mechanical performance [hp]

- for single-phase AC motor
  - at 230 V rated value 0.125 hp
- for three-phase AC motor
  - at 200/208 V rated value 0.333 hp
  - at 220/230 V rated value 0.333 hp
  - at 460/480 V rated value 0.75 hp

### Certificates/ approvals

|                                 |            |                                       |
|---------------------------------|------------|---------------------------------------|
| <b>General Product Approval</b> | <b>EMC</b> | <b>For use in hazardous locations</b> |
|---------------------------------|------------|---------------------------------------|



|  |                                  |                          |              |                |
|--|----------------------------------|--------------------------|--------------|----------------|
| <b>Functional Safety/Safety of Machinery</b> | <b>Declaration of Conformity</b> | <b>Test Certificates</b> | <b>other</b> | <b>Railway</b> |
|--|----------------------------------|--------------------------|--------------|----------------|

[Type Examination Certificate](#)



[Miscellaneous](#)

[Type Test Certificates/Test Report](#)

[Confirmation](#)

[Special Test Certificate](#)

### Further information

#### Information- and Downloadcenter (Catalogs, Brochures,...)

[www.siemens.com/ic10](http://www.siemens.com/ic10)

#### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RM1102-2AA14>

#### Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RM1102-2AA14>

#### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RM1102-2AA14>




#### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RM1102-2AA14&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RM1102-2AA14&lang=en)

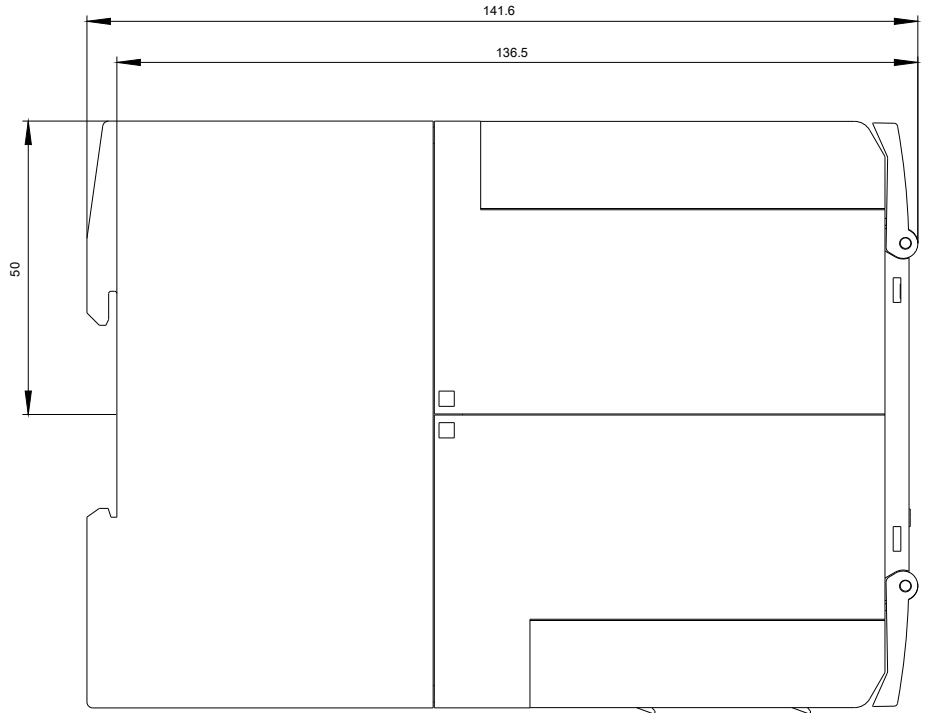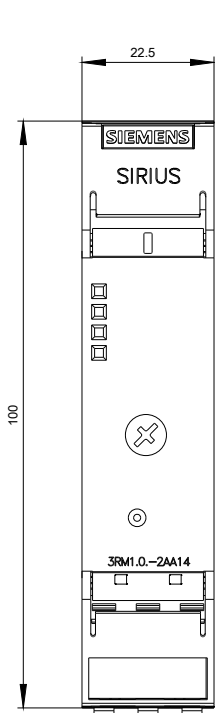



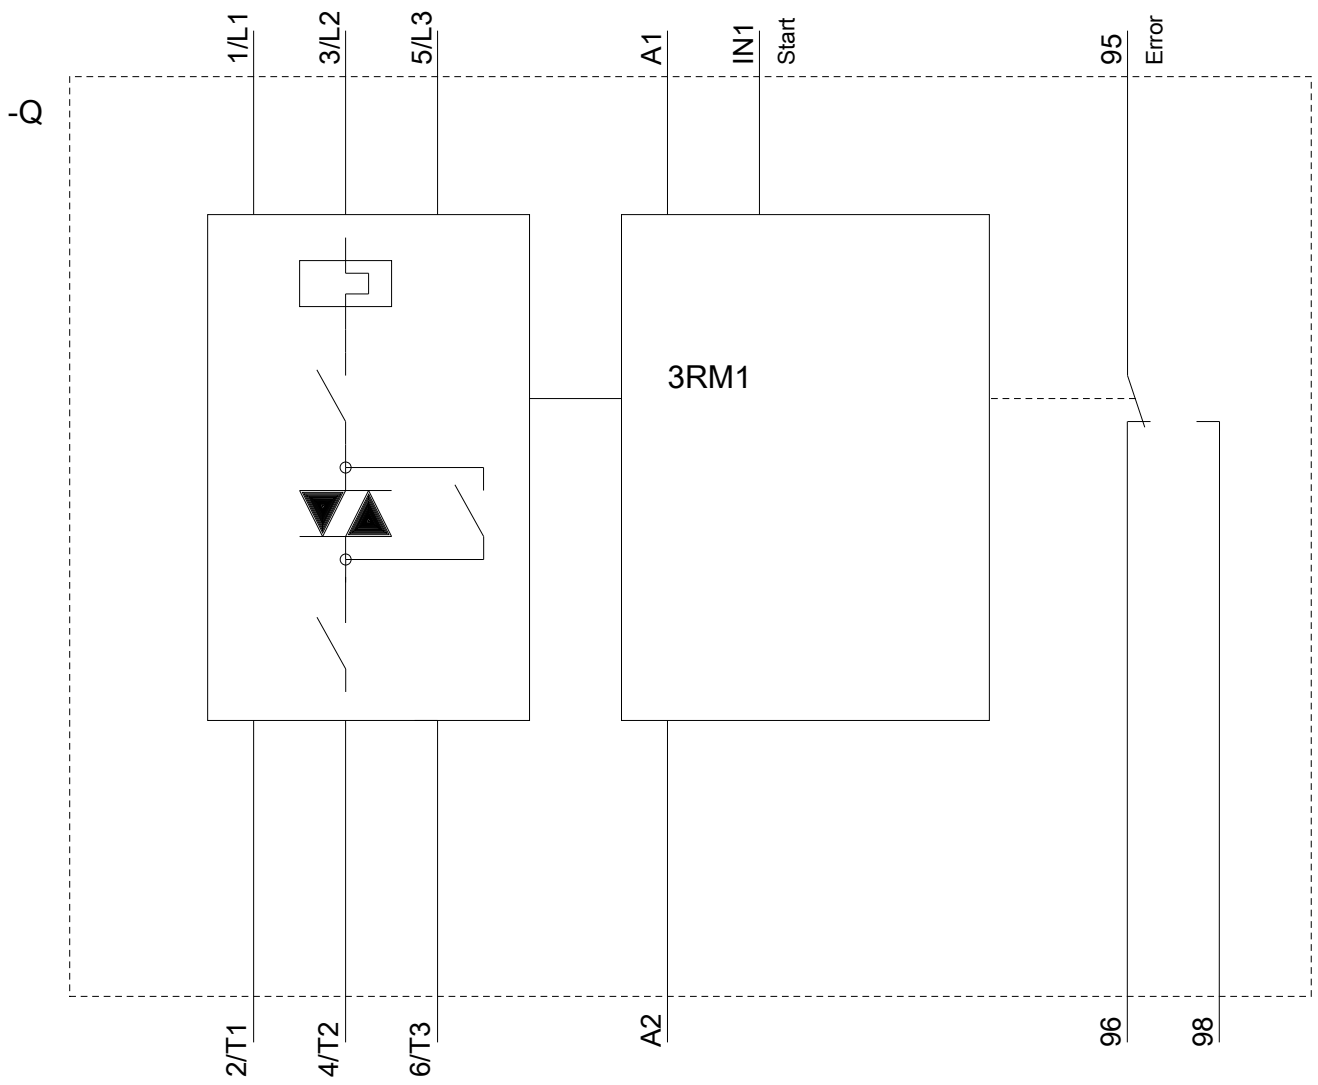

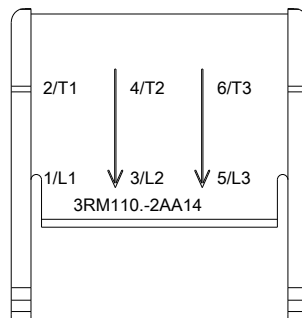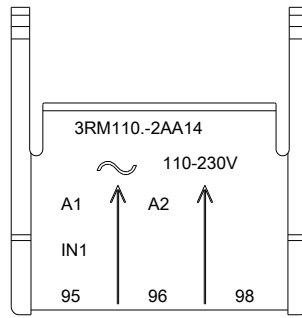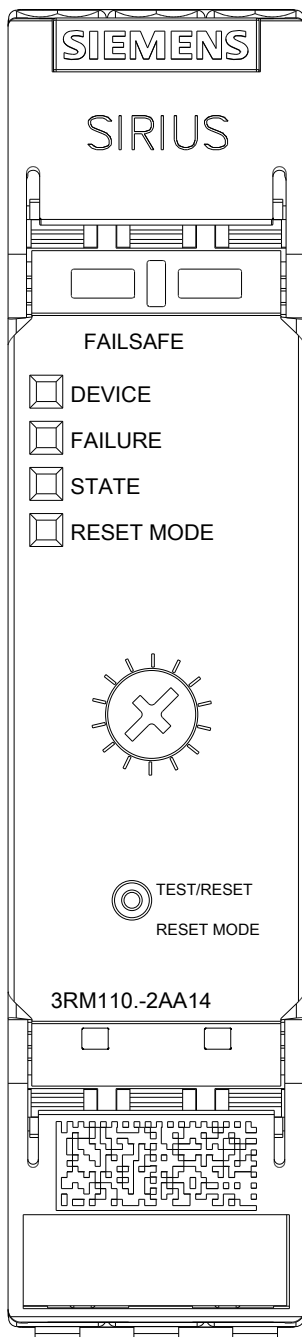

last modified:

12/16/2019