




**DOWNLOAD ENHANCED
INSTALL MANUALS AT
*dieselperformance.com***

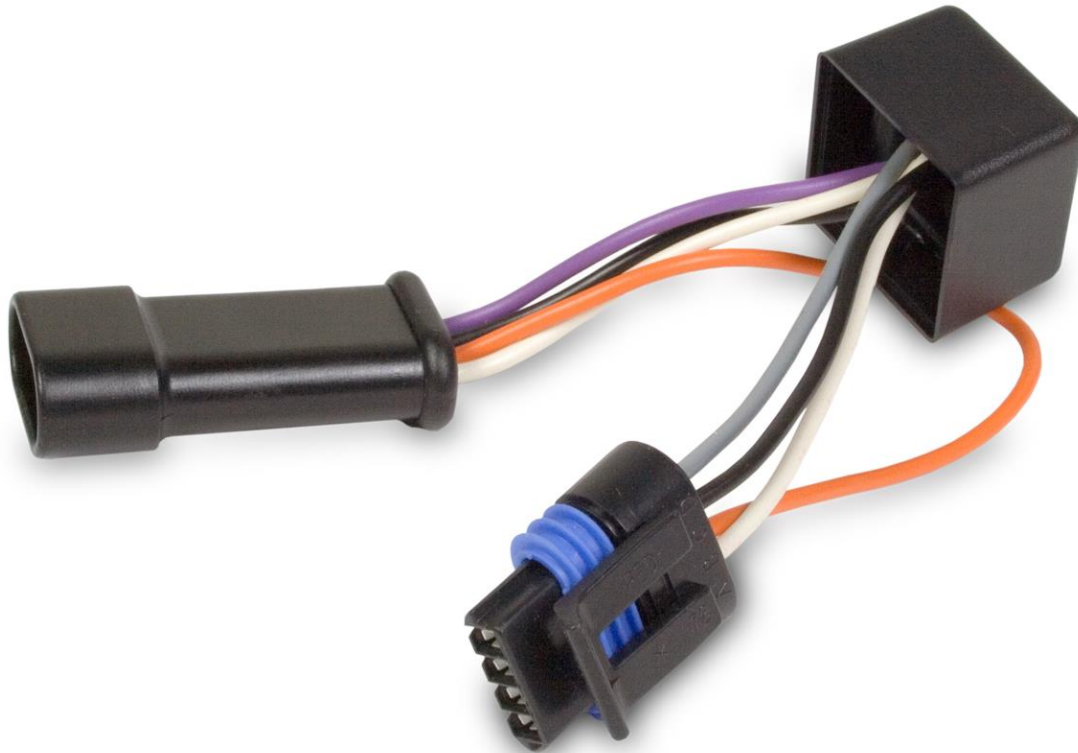

BD Boost Fooler

Part #	Application
1515935	2003-04 Dodge Cummins (3.2V) (White Dot)
1515936	2004½-07 Dodge Cummins (3.6V) (Blue Dot)

Please read this manual before starting installation.

UNLESS AN EO# IS LISTED, THIS PRODUCT IS LEGAL IN CALIFORNIA FOR RACING VEHICLES ONLY, WHICH MAY NEVER BE USED UPON A HIGHWAY.

Recommend Products

Description	Part#
Adjustable Wastegate	1047154


The adjustable wastegate will allow you to create more boost by eliminating boost creep and having better control of the turbocharger boost. Set it, and forget it.

Pre-Installation

Before you install the BD Boost Fooler, ensure that you have the correct unit for your application. Foolers for the 2003 and early 2004 (250hp and 305hp models) are identified with a white paint dot and will limit the voltage to the computer to 3.2V. Foolers for the late 2004-2007 (325hp model) have a blue dot and will limit the voltage to the computer at 3.6V.

Installation

Locate the boost electrical connection. It is located on the driver's side of the engine valve cover, by the injector rail. Refer to the picture below.

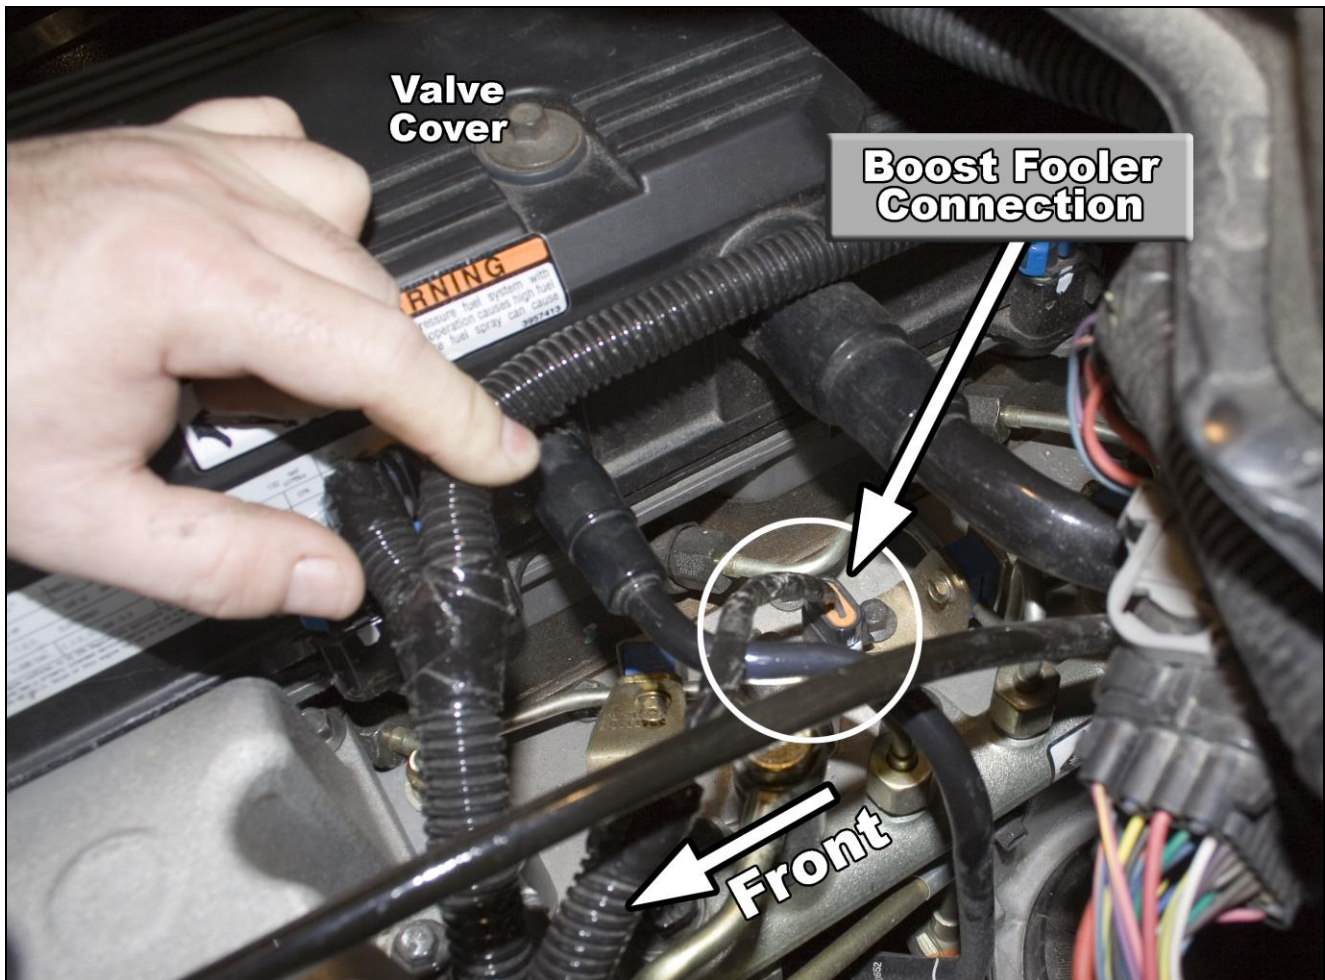

BD Engine Brake Inc.

Plant Address: 33541 MacLure Rd. Abbotsford, BC, Canada V2S 7W2

U.S. Shipping Address: 88-446 Harrison St, Sumas, WA 98295 U.S. Mailing Address: P.O. Box 231, Sumas, WA 98295

Phone: 604-853-6096 | Fax: 604-853-8749 | Internet: www.bd-power.com

Unplug the factory boost connection from the engine. Plug the BD Boost Fooler inline with the factory plug, and then plug the remaining end of the BD Boost Fooler into the factory plug on the engine.



Questions?

If you have any technical concerns or questions about this product, please contact our Technical Support hotline at (800) 887-5030, between 8:30am-5:30pm Pacific Standard Time (PST), Monday to Friday. Or, you can post a topic on our informative on-line technical forum, located at <http://www.bd-power.com/>.