

# 18" EDMUND PENDANT

## Installation Guide





## **CAUTION**

This product should be installed only by a licensed electrician. Turn off all electrical power at the main fuse box before installation. Turning off the power from a light switch may not be sufficient enough to prevent from electrical shock.

For your safety and for proper operation of the luminaire, read and understand all instructions completely before installation.


## **UNDERSTANDING THE FIXTURE**

Please care for the brass pieces with a soft cloth, and avoid using any abrasive cleaners or products. The patination process will speed up if any brass product or component is excessively handled. Gloves are recommended for installation.


## **BEFORE INSTALLATION**

Carefully unpack the luminaire and inspect for damage. Please check that you received all of the components pictured in this guide. If anything is missing, please contact, [shopkeeper@lostine.com](mailto:shopkeeper@lostine.com), and one of our customer service representatives will be able to assist you.


**COMPONENTS INCLUDED**

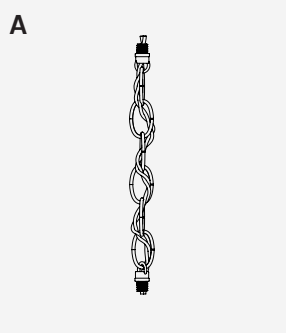


**A**  
Cordset + Chain  
x1

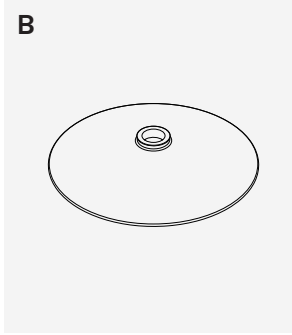


**B**  
Shade  
x1

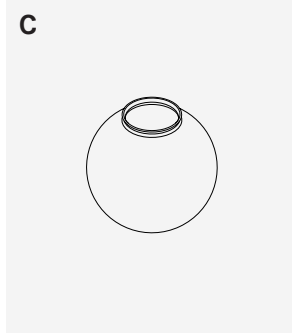


**C**  
Glass Globe  
x1

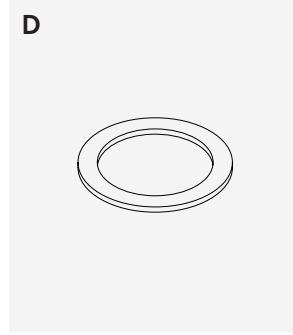

**D**  
Brass Captive Ring  
x1

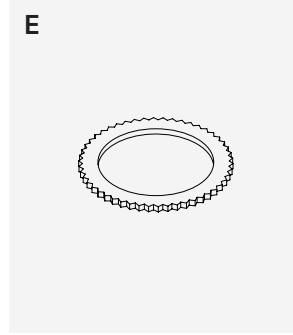


**E**  
Knurled Captive Ring  
x1

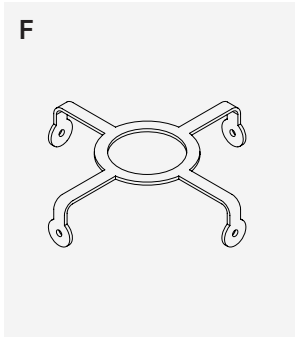


**F**  
Brass Globe Holder  
x1



**G**  
Brass Shade Holder  
x1

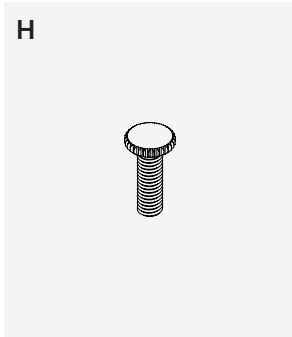


**H**  
Set Screw  
x7

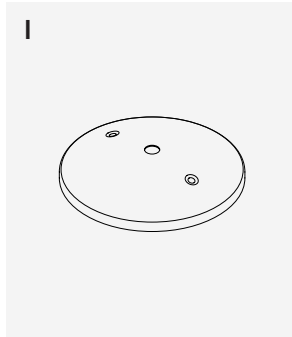


**I**  
Ceiling Canopy  
x1



**J**  
Crossbar  
x1

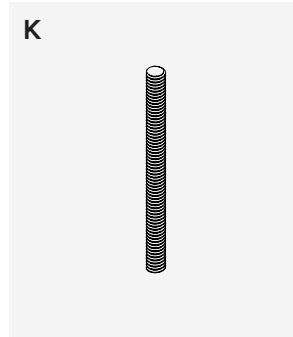

**K**  
8-32 Steel Stud  
x2

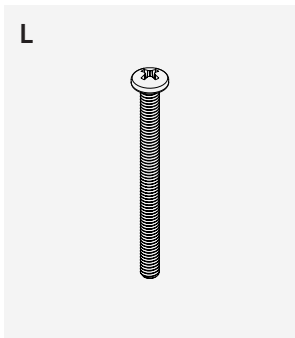

**L**  
2" x 8-32 Steel Screw  
x2




**M**  
8-32 Brass Nut  
x2



**N**  
Hex Nut  
x2




**O**  
Nylon Strain Relief  
x1

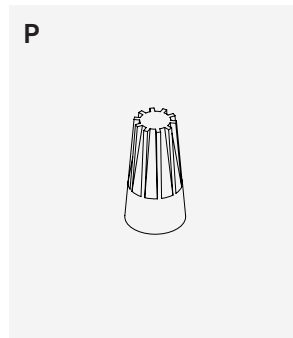


**P**  
Plastic Wire Nut  
x3

**COMPONENTS NOT INCLUDED**


Q

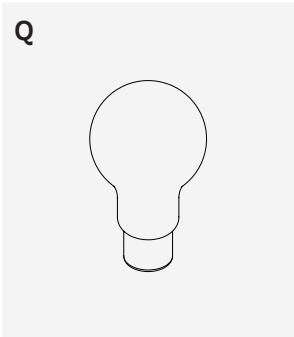

E 26 Bulb  
x1

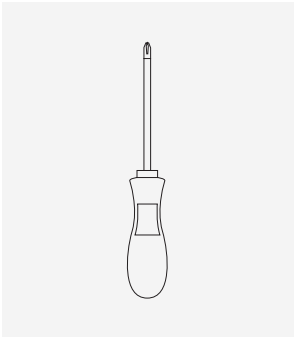

Phillips Head Screwdriver  
x1

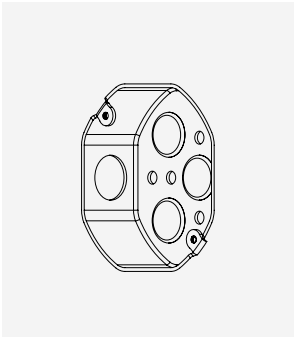

Junction Box  
x1

## WIRING


### 1. WARNING

Shut off the power to the electrical box. Turning off the power from a light switch may not be sufficient to prevent electrical shock.

- Remove the Crossbar (J) from the Canopy (I), leaving the 8-32 Steel Studs (K) attached to the Crossbar (J).
- Secure the Crossbar (J) to the electrical box using the provided 2" x 8-32 Screws (L).
- Set the desired hanging height by removing excess chain links from the Cordset (A), then adjust the length of cord by loosening the set screw on the Plastic Strain Relief (O) from inside of the Canopy (I) and pulling the Cord (A) through, then tighten the Strain Relief (O) until the cord is secure in place. If the excess cord needs to be trimmed, make sure to leave at least six inches of wire from the Canopy (I) for ease of wiring.
- Following the electrical configuration below, connect the wires from the luminaire to the electrical box using the provided Plastic Wire Nuts (P).

From Electrical Box	From Luminaire
Connect Black or Red (HOT) wire from supply to:	Black Wire
Connect White (NEUTRAL) wire from supply to:	White Wire
Secure Green or Bare Copper (GROUND) wire from supply to the green screw on the Crossbar (J).	

- Slide the Canopy (I) over the 8-32 Studs (K) and fasten with the provided Brass Nuts (M).

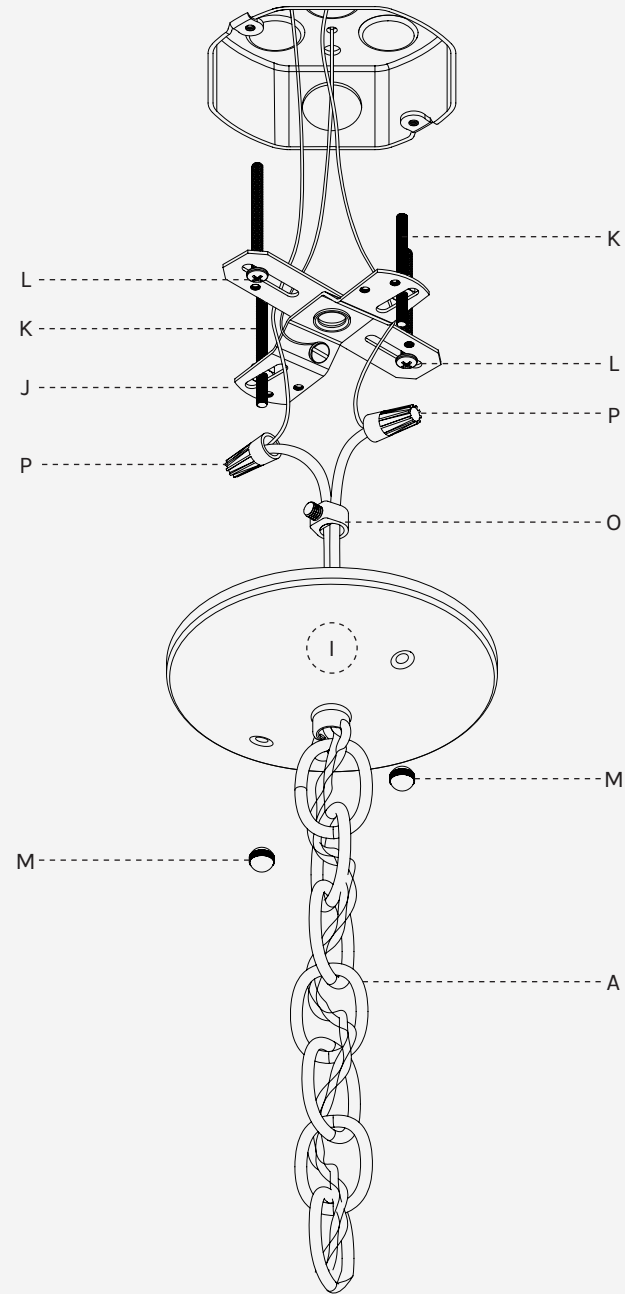

## SHADE ASSEMBLY

1. Remove both Brass Captive Rings (D) and (E) and Brass Globe Holder (F) from the socket.
2. Secure the Shade (B) to the Brass Shade Holder (G) until all three Set Screws (H) are in contact with the shade. The Set Screws (H) should sit directly under the lip of the Shade (B).
3. Assemble the Brass Captive Ring (D), Brass Globe Holder (F), and the Knurled Captive Ring (E) back onto the socket.
4. Insert desired light bulb (Q), (not included).
5. Secure the Glass Globe (C) to the Brass Globe Holder (F) until all four Set Screws (H) are in contact with the Globe (C). The Screws (H) should sit directly under the lip of the Globe's (C) opening.
6. Turn the power back on to the electrical box and enjoy your luminaire.

