



OUTDOOR TECH.

GRIZZLY

**PORTABLE
POWER
STATION**

296 Wh



Good call on picking up the Outdoor Tech® Grizzly Portable Power Station. Your experience of the universe will soon be enhanced powerfully. This manual exists to help make sure that you use them correctly, so you're definitely going to want to relax for a hot second and look through this.

Kisses,



OUTDOOR TECH.

CONTENTS

Power Station



Car Charge Cord



AC Adapter Charge Cord

ANATOMY



SPECIFIC PORT ACTIVATION BUTTONS

- ① Press for LED flashlight function

One press - NORMAL

Second press - BRIGHT

Third press - SOS flashing

Fourth press - OFF

LED

- ② Press for DC port function

DC

- ③ Press for USB port function

USB


- ④ Press for AC port function

AC

Press these buttons to turn off the output, to save power when the ports are not in use. The small DC, USB, and AC icons on the LCD screen will disappear once off.



PORTS-USB


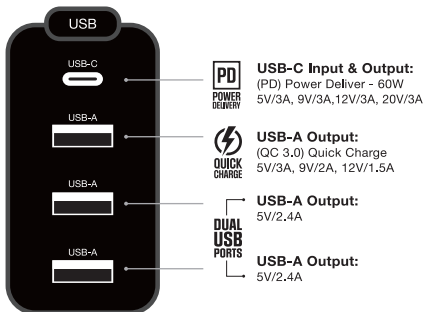


USB-C: PD 60W
POWER DELIVERY (PD) technology enables your device to take on more power in a shorter amount of time, which translates to superfast charging.




USB-A: QC 3.0 18W
QUICK CHARGE (QC) provides simple, safe and efficient charging of devices with superior speed.

■ PORTS-DC & AC

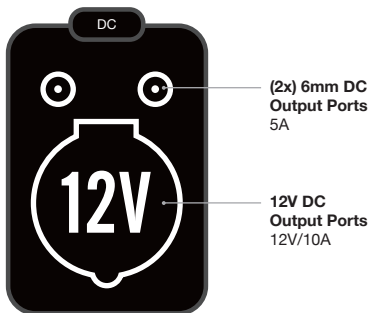

LCD DISPLAY

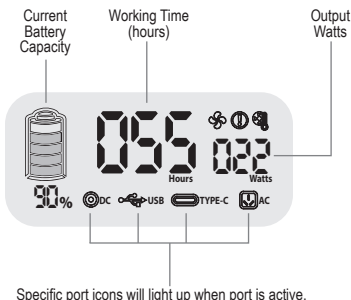

Fan turns on if the temperature is over 40° C.



Temperature warning of AC power. Temperature range 90°-95°.



Overload warning.

Management System	Temperature control Current Surge, Short circuit, Over-current, Low-voltage, Over-voltage protection Smart BMS	Operating Temperature	-10—45 °C
		Recharging Temperature	0—45 °C
Lifecycles	>500	Certifications	FCC/CE/PSE/RoHS
Warranty	12 Months		

CHARGING THE POWER STATION

FOUR WAYS TO CHARGE

1. WALL PLUG CHARGE - (DC INPUT)

Plug it into a wall socket using the included AC Wall Charger cable. Fully recharges in 5+ hours.

2. CAR CHARGE - (DC INPUT)


Plug into a 12V car adapter using the included 12V Car Charging Cable. Fully recharges in 8+ hours.

3. SOLAR CHARGE - (DC INPUT)

Charge up from the sun by connecting a compatible solar panel. Charge times are dependent on the size of the solar panel. The Outdoor Tech - Dawn Solar Panel will fully recharge the Grizzly Power Station in 8+ hours.



THE OUTDOOR TECH
DAWN SOLAR PANEL
SOLD SEPARATELY



4. USB-C CHARGE
Plug a USB-C cable into the Power Station to fully recharge in 5.5+ hours.
(based on 60W)

■ HOW TO USE IT

ACTIVATING THE PORTS

Press the small button above the ports you want to use (DC), (USB), or (AC). The port icon will light up on the LCD screen. Now the output is ON for those ports. You can now plug-in and charge your items.



AC PORT

The continuous AC output port can only charge/power devices that operate at less than 300 Watts. If it exceeds that the port will shut off automatically.

ALL PORTS

For power saving, each ports will shut off automatically in 1 minute when detected output is under 2 Watts.

■ CHARGE YOUR DEVICES

The Grizzly Power Station gives you the power you need to charge all your devices.

- Four USB ports
- Two 110V AC ports
- One 12V DC port

PLUG IN AND CHARGE UP



Recharge your drone
around 6 times.



Recharge your camera
around 15 times.



Recharge your smart phone
around 22 times.



Recharge your lantern
around 25 times.



Recharge your laptop
around 4 times.



Recharge your car fridge
around 12 times.

*These are just a few of the many items you can
charge with the Grizzly Power Station.*

CARE & MAINTENANCE

- Please read this users manual carefully and follow all instructions before using this product.
- Please keep close supervision on children when they are near this product.
- Please use original accessories to reduce the risk of electric shock.
- Please remove the power plug when not in use.
- Do not try to disassemble the Grizzly Power Station.
- Do use the product with damaged wires or plugs or damaged output cables.
- Do not use or store the product in high temperature environments such as in a car or in direct sunlight.
- Do not block or cover the hot dissipation hole when product is in use.
- Please store and use product in a dry and ventilated environment. Avoid any water or rain.
- If the power station is not used for a while, it should be recharge every 3 months and keep the power at 60-80%.
- Use a soft, dry cloth to wipe the surface.
Do not use intensive chemical products or detergent to clean the product.
- For best performance, fully charge the Power Station before charging other devices.

SPECS

PORTS:

- DC Output: 12V/10A
- (6mm) DC Output: (2x) 5A, Total 10A
- AC Output: (2x) 110V/300W, peak 600W
- USB-C (Input/Output): PD 60W
5V/3A, 9V/3A, 12V/3A, 20V/3A
- USB-A Output: 5V/3A, 9V/2A, 12V/1.5A QC
3.0 (Quick Charge)
- USB-A Output: (2x) 5V/2.4A

- Battery Capacity: 296Wh, 80,000mAh
- Battery: Lithium-ion
- Pure sine wave (household AC power)
- Weight: 7.3lbs (3.35 Kg)
- Dimensions: 8.4in x 7.5in x 6.2in
215mm x 192mm x 160mm



DON'T BE SO ANTISOCIAL



Facebook.com/outdoortechnology
Twitter & Instagram: @outdoortech

Questions, comments, complaints, secret desires,
or just to say what's up: email info@outdoortech.com

K bye.



www.outdoortech.com