

A Company of Geoidsoft Inc.

# **GPS&GLONASS Signal Repeater for Indoor Reception**

Model: RK-106

Indoor GPS&GLONASS Coverage Solutions up to 10m Re-radiating Range!



**RK-106** is a complete GPS/GLONASS re-radiating system with dual antennas to re-transmit real-time GPS&Glonass satellite outdoor reception to an indoor environment. The system kits include high external GPS/GLONASS antenna, a precisely calibrated amplifier circuit with ceramic patch re-radiator, and a built-in power supply regulator. The ceramic patch re-radiator allows multiple GPS/GLONASS receivers perform on-the-fly receiver performance within a closed environment, while the main GPS/GLONASS antenna is located on an unmanned outdoor location. The input signal power at the receiving antenna is approximately -130dBm (spreading over 2 MHz), so the desire signal is below the thermal noise floor. The whole system is designed as PNP (Plug-and-Play) hardware and it can be installed either temporarily or permanently to a secured location by using whether dashboard suction cup or screws.

### Features

- Compact size/low cost/high performance
- Polycarbonate radome with fully waterproof at IP66 rating
- Permanently screw mount/dashboard suction cups
- One external re-radiator for multiple, different GPS receivers
- Real-time GPS satellites outdoor reception to an indoor environment
- Cable length as long as 40m RF cable, extendable to 100m
- Re-radiating range as long as 10m

## **Applications**


RK-106 is ideal indoor GPS and GLONASS coverage solutions for

- Hangars
- Fire Stations
- Police Stations
- GPS Labs
- GPS Workshops
- GPS Retail Stores
- GPS Production Line
- GPS Repair Service
- GPS Signal Reception in Underground Garage such as Tunnels and Mines etc.

https://www.mobilegpsonline.com e-mail: sales@mobilegpsonline.com



### **Specifications**

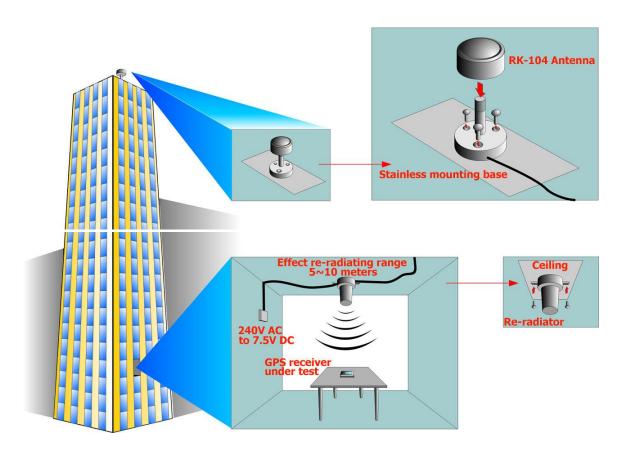

## **Installation Steps**

- 1. Locate and mount the RK-106 external antenna on the center roof of building horizontally with the best visibility of the sky
- 2. Locate and mount the RK-106 ceramic patch re-radiator to the ceiling with its cylinder facing and against the center of the testing bench.
- 3. Connect the RK-106 external antenna to the ceramic patch re-radiator with 40m RG58 A/U RF cable.
- 4. Power up the system by plugging the AC 115V (240V) to DC 9V adapter

**Note:** The helix type re-radiator has to be located/mounted inside the building with adequate isolation from the RK-106 external antenna to avoid interference



## **Specifications**

General Description	Professional GPS/GLONASS re-radiating system	
Physical Construction	Construction: Polycarbonate radome enclosure, cast die at the bottom, sealed with weatherproof rubber.	
	Dimensions: Antenna: 4.5" in diameter & 2.9" in height Ceramic patch re-radiator: 85mm (L) x 80mm (W) x 88mm (H) Regulator: 65mm (L) x 32mm (W) x 43mm (H)	
	Cable Length: 40m RG-58 A/U	
	Standard Connector: Antenna: TNC Jack, re-radiator: SMA Jack	
	Weight: Antenna: 210g Ceramic patch re-radiator:181g Regulator: 85g	
	Standard Mounting: Stainless bracket mount	
Performance Specification	External Antenna	Polarization: R.H.C.P.
		Absolute Gain @ Zenith: +5 dBi typically
		Gain @ 10° Elevation: -5 dBi typically
		General: L1 frequency, 1575.42 MHz +/-1.023 MHz and Glonass 1602 +/-8MHz
		Gain: 27 dB typically
		Bandwidth: 2 MHz min.
		Noise Figure: 2.0 max.
		Axial Ratio: 3dB max.
		Out of Band Attenuation: 20 dB min. @ Fo +/- 50Mhz
		VSWR: 2.0 max.
		Output Impedance: 50 ohm
	Ceramic patch Re-radiator	Re-radiating Range: 10m
Electrical Specification	Supply Voltage: 100~240V AC to 7.5V DC Regulator	
	Power Consumption: 48mA (+/- 5%) @ 7.5V DC	
Environmental Specification	Operating Temperature: -30°C to +80°C	
	Storage Temperature: -40°C to +85°C	
	Operating Humidity: 95% RH, non-condensing	

#### **Geoidsoft Inc. - Mobile GPS Online**