



Mackenzie CHANDELIER

INSTALLATION GUIDE



WEARING GLOVES
IS RECOMMENDED

DANGER: ELECTRIC SHOCK RISK. FOR YOUR SAFETY,
TURN OFF ELECTRICAL POWER BEFORE BEGINNING
INSTALLATION AND USE CAUTION WHEN INSTALLING.

+1 888.399.9905


www.vault-light.com | sales@vault-light.com



MACKENZIE ROUND GLASS SHADE CHANDELIER INSTRUCTION

Steps:

1. Shut off the main electrical supply from the main fuse box/ circuit breaker.
 2. Carefully unpack all fixture parts and hardware and lay them on a soft surface for assembly.
 3. Remove the mounting plate (A) from Canopy(B) by loosening the finial (C) .
 4. Place the mounting plate (A) over the center of the ceiling junction box.
 5. Align holes in mounting plate(A) with holes in junction box and attach with two mounting screws(J).
Secure screws with a Phillips head screwdriver.
 6. Pull the electrical cord of "J box"
 7. Carefully inspect the chandelier's fixture wires.
Neutral fixture wire: It has very fine ridges molded into its plastic covering.
Hot fixture wire: It has a smooth covering
Ground wire: Bare wire
 8. Wrap ground wire of lamp assembly and ground wire of junction box together and fasten together with a wire nut and wrap the connection with electrical tape.
 9. Attach the neutral fixture wire from the chandelier to the neutral junction box wire. Fasten each together with a wire nut and wrap the connection with electrical tape.
 10. Attach the hot fixture wire from the chandelier to the hot junction box wire. Fasten each together with a wire nut and wrap the connection with electrical tape.
- DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
11. Gently tuck the wire connections(K) neatly into the ceiling junction box.
 12. Push canopy(B) up over the mounting plate(A) until it is flush with the ceiling.
 13. Push finial (C) through hole in canopy(B) and thread onto nipple on the mounting plate(A). Secure by finial (C) clockwise until canopy(B) is flush with the ceiling.
 14. Insert 8 TYPE B 60W bulbs (or /CFL 12W OR /LED 10W, not included) into socket(H).
DO NOT EXCEED THE SPECIFIED WATTAGE.
 15. Put the glass shade (F) on the lamp body (D).
 16. Restore power to junction box and test fixture.

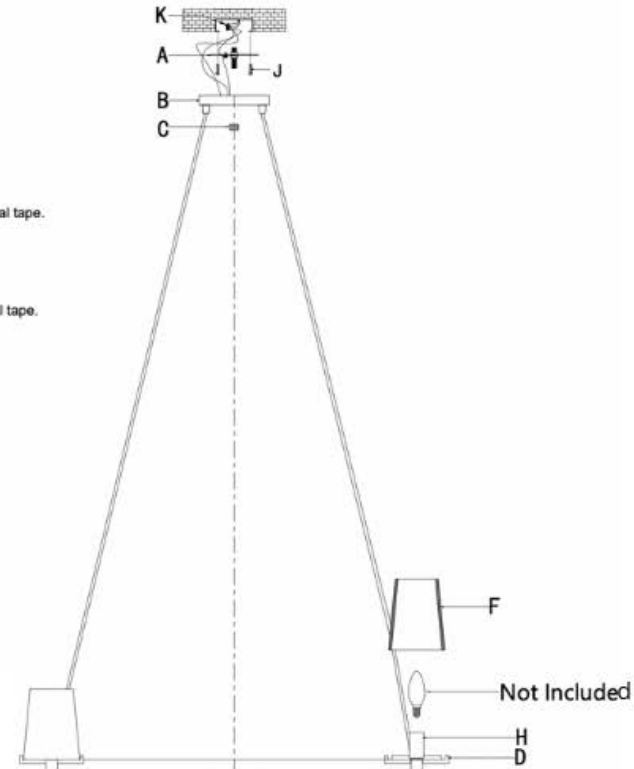

Maintenance:

1. Clean surface by soft cloth.
2. Clean glass panels by bland soap-suds.
3. Don't clean it by special deparative(including mmonized products),herwise it will destroy the surface.

Caution:

1. Suggest to installing the fixture by authoritative electrician.
2. Make sure power off before relamping.
3. Keep flammability far away from bulb.
4. If the supply wire destroyed,only the manufacturer or service agent or authoritative electrician can replace it.